



ARKANSAS  
Department of Environmental Quality

July 3, 2008

Mr. Rodney Williams  
Rock-Tenn Company  
329 Industrial Park Road  
Harrison, Arkansas 72601-6895

Re: Notice of Administrative Amendment  
AFIN: 05-00097, Permit No. 1197-AR-3

Dear Mr. Williams:

Enclosed is revised Permit No. 1197-AR-3 completed in accordance with the provisions of Section 19.407 of Regulation No. 19, Regulations of the Arkansas Plan of Implementation for Air Pollution Control.

On page 1, the contact position was updated. On page 2, the PM/PM10 emissions rate were removed from the Total Allowable Emissions Table. On pages 5 and 6, SN-04 and SN-05 were removed from the Specification Conditions #1 and #2. On page 7, Specific Condition #5 (Visible Emission Limits for the SN-04 and SN-05) was removed from the permit. Additionally, the AFIN 05-00097 was updated throughout the permit.

Please place the revised permit in your files.

Sincerely,

A handwritten signature in black ink, appearing to read "Mike Bates", with a stylized flourish at the end.

Mike Bates  
Chief, Air Division

PMM

Enclosure



# ADEQ MINOR SOURCE AIR PERMIT


Permit #: 1197-AR-3

IS ISSUED TO:

Rock-Tenn Company  
329 Industrial Park Road  
Harrison, AR 72601  
Boone County  
AFIN: 05-00097

THIS PERMIT IS YOUR AUTHORITY TO CONSTRUCT, MODIFY, OPERATE, AND/OR MAINTAIN THE EQUIPMENT AND/OR FACILITY IN THE MANNER AS SET FORTH IN THE DEPARTMENT'S MINOR SOURCE AIR PERMIT AND YOUR APPLICATION. THIS PERMIT IS ISSUED PURSUANT TO THE PROVISIONS OF THE ARKANSAS WATER AND AIR POLLUTION CONTROL ACT (ARK. CODE ANN. SEC. 8-4-101 ET SEQ.) AND THE REGULATIONS PROMULGATED THEREUNDER, AND IS SUBJECT TO ALL LIMITS AND CONDITIONS CONTAINED HEREIN.

Signed:



Mike Bates

Chief, Air Division

July 3, 2008

Date Amended

**Rock-Tenn Company**  
**Permit #: 1197-AR-3**  
**AFIN: 05-00097**

**SECTION I: FACILITY INFORMATION**

|                      |  |
|----------------------|--|
| PERMITTEE:           | Rock-Tenn Company                              |
| AFIN:                | 05-00097                                       |
| PERMIT NUMBER:       | 1197-AR-3                                      |
| FACILITY ADDRESS:    | 329 Industrial Park Road<br>Harrison, AR 72601 |
| COUNTY:              | Boone  |
| CONTACT POSITION:    | Rodney Williams, Environmental Coordinator     |
| TELEPHONE NUMBER:    | (870) 741-9401                                 |
| REVIEWING ENGINEER:  | Michael H. Watt                                |
| UTM North-South (Y): | Zone 15 4011.7 km                              |
| UTM East-West (X):   | Zone 15 487.0 km                               |

**Rock-Tenn Company**  
**Permit #: 1197-AR-3**  
**AFIN: 05-00097**

## **SECTION II: INTRODUCTION**

### **Summary**

The Rock-Tenn Company located on Industrial Park Road in Harrison manufactures folding printed paperboard cartons. This modification increases the HAP lb/gal limit for the Offset Press (SN-01) fountain solutions from 1.0 lb/gal to 3.0 lb/gal. This change does not increase any of the permitted VOC or HAP limits. This facility is categorized as a minor source and is subject to the MACT regulation for Printing and Publishing.

### **Process Description**

Paperboard is received by truck and is prepared before being fed to the presses. The facility currently operates both offset printing presses and flexographic printing presses.

After printing, the paperboard is then cut in the die cutters. The paperboard scrap is pneumatically transported to cyclones, where it is collected and baled.

The printed paperboard is then sent to the folding, gluing, and windowing operations. The finished paperboard boxes are then packaged and shipped to the customers.

### **Regulations**

Rock-Tenn is subject to regulation under the *Arkansas Air Pollution Control Code* (Air Code) and the *Arkansas Plan of Implementation for Air Pollution Control* (SIP).

This facility is also subject to 40 CFR Part 63, Subpart KK Printing and Publishing MACT. This regulation affects all facilities that perform wide-web flexographic printing operations. Rock-Tenn is an area source for HAP emissions, and elects to comply with 63.820(a)(2) and (3). Area sources are only required to comply with recordkeeping and notification aspects of the rule. Section 63.829(d) requires monthly recordkeeping on all HAP containing materials, which is used to verify area source status. Section 63.830(b)(1) requires initial notification to the EPA administrator of rule applicability.

**Rock-Tenn Company**  
**Permit #: 1197-AR-3**  
**AFIN: 05-00097**

The following table is a summary of the facility's total emissions.

| TOTAL ALLOWABLE EMISSIONS |                |       |
|---------------------------|----------------|-------|
| Pollutant                 | Emission Rates |       |
|                           | lb/hr          | tpy   |
| VOC                       | 219.0          | 70.0  |
| Acetone                   | 30.00          | 5.00  |
| Ammonia                   | 7.60           | 10.00 |
| HAPs                      | 64.00          | 9.00  |

**Rock-Tenn Company**  
**Permit #: 1197-AR-3**  
**AFIN: 05-00097**

### **SECTION III: PERMIT HISTORY**

Permit 1197-A was issued to Rock-Tenn Company in September, 1991. This was the initial permit for the facility after expansions in 1988, 1989, and 1990.

Permit 1197-AR-1 was issued to Rock-Tenn Company on March 2, 1994. This permit allowed for installation of a new printing press, removal of an old press, an increase in VOC emissions, and quantification of other existing emissions.

Permit 1197-AR-2 was issued to Rock-Tenn Company on September 11, 2000. This permit allowed for installation of a new seven color offset printer (SN-06), updated hourly and annual emissions based on worst-case scenarios, and allowed for HAP trading using a TLV table.

**Rock-Tenn Company**  
**Permit #: 1197-AR-3**  
**AFIN: 05-00097**

#### **SECTION IV: EMISSION UNIT INFORMATION**

##### **Specific Conditions**

1. Pursuant to §19.501 et seq of the Regulations of the Arkansas Plan of Implementation for Air Pollution Control, effective February 15, 1999 (Regulation 19) and A.C.A. §8-4-203 as referenced by §8-4-304 and §8-4-311, the permittee shall not exceed the emission rates set forth in the following table.

| SN | Description        | Pollutant      | lb/hr | tpy |
|----|--------------------|----------------|-------|-----|
| 01 | Offset Press       | VOC            | 65.5  | PAL |
| 02 | Flexographic Press | VOC            | 34.0  | PAL |
| 03 | Flexographic Press | VOC            | 34.0  | PAL |
| 04 | Baler Cyclone #1   | Source Removed |       |     |
| 05 | Baler Cyclone #2   | Source Removed |       |     |
| 06 | Offset Press       | VOC            | 65.5  | PAL |
| 07 | Gluing Operations  | VOC            | 20.0  | PAL |



**Rock-Tenn Company**  
**Permit #: 1197-AR-3**  
**AFIN: 05-00097**

2. Pursuant to §18.801 of the Arkansas Air Pollution Control Code, effective February 15, 1999 (Regulation 18) and A.C.A. §8-4-203 as referenced by §8-4-304 and §8-4-311, the permittee shall not exceed the emission rates set forth in the following table.

| SN | Description        | Pollutant                  | lb/hr                  | tpy |
|----|--------------------|----------------------------|------------------------|-----|
| 01 | Offset Press       | Acetone<br>Ammonia<br>HAPs | 10.00<br>3.00<br>17.00 | PAL |
| 02 | Flexographic Press | Acetone<br>Ammonia<br>HAPs | 5.00<br>0.80<br>10.00  | PAL |
| 03 | Flexographic Press | Acetone<br>Ammonia<br>HAPs | 5.00<br>0.80<br>10.00  | PAL |
| 04 | Baler Cyclone #1   | Source Removed             |                        |     |
| 05 | Baler Cyclone #2   | Source Removed             |                        |     |
| 06 | Offset Press       | Acetone<br>Ammonia<br>HAPs | 10.00<br>3.00<br>17.00 | PAL |
| 07 | Gluing Operations  | HAPs                       | 10.00                  | PAL |

3. Pursuant to §19.501 et seq of Regulation #19 and 40 CFR Part 52, Subpart E, the permittee shall not exceed the emission rates set forth in the following table.

| Pollutant | tpy  |
|-----------|------|
| VOC       | 70.0 |

**Rock-Tenn Company**  
**Permit #: 1197-AR-3**  
**AFIN: 05-00097**

4. Pursuant to §18.801 of Regulation #18 and A.C.A. §8-4-203 as referenced by §8-4-304 and §8-4-311, the permittee shall not exceed the emission rates set forth in the following table.

| Pollutant | tpy   |
|-----------|-------|
| Acetone   | 5.00  |
| Ammonia   | 10.00 |
| HAP       | 9.00  |

5. Pursuant to §18.801 of Regulation 18, and A.C.A. §8-4-203 as referenced by §8-4-304 and §8-4-311, the permittee shall not cause or permit the emission of air contaminants, including odors or water vapor and including an air contaminant whose emission is not otherwise prohibited by Regulation #18, if the emission of the air contaminant constitutes air pollution within the meaning of A.C.A. §8-4-303.
6. Pursuant to §18.901 of Regulation 18, and A.C.A. §8-4-203 as referenced by §8-4-304 and §8-4-311, the permittee shall not conduct operations in such a manner as to unnecessarily cause air contaminants and other pollutants to become airborne.
7. Pursuant to §19.501 et seq of Regulation #19 and 40 CFR Part 52 Subpart E, the permittee shall not exceed the VOC and HAP content listed in the following table for sources SN-01 and SN-06.

| Material          | Max VOC Content | Max HAP Content | Maximum Acetone Content | Maximum Ammonia Content |
|-------------------|-----------------|-----------------|-------------------------|-------------------------|
| Ink               | 25% by Weight   | 5% by Weight    | -                       | -                       |
| Coating           | 10% by Weight   | 5% by Weight    | -                       | 2% by Weight            |
| Press Wash        | 8 lb/gal        | 1 lb/gal        | -                       | -                       |
| Roller Wash       | 8 lb/gal        | 2 lb/gal        | 5 lb/gal                | -                       |
| Fountain Solution | 7 lb/gal        | 3 lb/gal        | -                       | -                       |

**Rock-Tenn Company**  
**Permit #: 1197-AR-3**  
**AFIN: 05-00097**

8. Pursuant to §19.501 et seq of Regulation #19 and 40 CFR Part 52 Subpart E, the permittee shall not exceed the VOC and HAP content listed in the following table for sources SN-02 and SN-03.

| <b>Material</b> | <b>Max VOC Content</b> | <b>Max HAP Content</b> | <b>Maximum Acetone Content</b> | <b>Maximum Ammonia Content</b> |
|-----------------|------------------------|------------------------|--------------------------------|--------------------------------|
| Ink             | 25% by Weight          | 10% by Weight          | -                              | 2% by Weight                   |
| Varnish         | 25% by Weight          | 10% by Weight          | -                              | 2% by Weight                   |
| Roller Wash     | 8 lb/gal               | 2 lb/gal               | 5 lb/gal                       | -                              |
| Flexo Wash      | 8 lb/gal               | 2 lb/gal               | -                              | -                              |

9. Pursuant to 40 CFR §63.820(a)(2)(i) and §63.820(a)(2)(ii), this facility is considered an area source under the MACT regulation and shall keep required records as contained in 40 CFR §63.829(d) (Specific Condition #11) in order to verify that the facility emitted less than 10 tons per year of a single HAP and 25 tons per year of any combination of HAPs.
10. Pursuant to 40 CFR §63.829(d), §19.703 of Regulation #19, 40 CFR Part 52, Subpart E, and A.C.A. §8-4-203 as referenced by §8-4-304 and §8-4-311, the permittee shall maintain monthly usage records of all VOC and HAP containing materials (paints, solvents, primers, thinners, sealants, adhesives, coatings, etc) and associated MSDS. Records shall be updated by the fifteenth day of the month following the month to which the records pertain. A twelve month rolling total and each individual month's data shall be kept on site, and shall be made available to Department personnel upon request.
11. Pursuant to §18.801 of Regulation 18 and A.C.A. §8-4-203 as referenced by §8-4-304 and §8-4-311, the permittee shall not exceed the following HAP formulated limits at this facility for the designated TLV. The TLV of a particular compound will be determined using information on the appropriate MSDS or the most recent ACGIH data. Compounds with an extremely low HAP concentration (<1% by weight) are not subject to the table provided that the total emissions of the HAP in question do not exceed 1 ton per year and the combined excepted HAP emissions from these compounds do not exceed 2.5 tons per year. This low concentration exemption does not apply if the Relative Toxicity (RT) of

**Rock-Tenn Company**  
**Permit #: 1197-AR-3**  
**AFIN: 05-00097**

the HAP in question is less than 4.38 times the pound per hour.

| Minimum HAP TLV<br>(mg/m <sup>3</sup> ) | Maximum Individual HAP<br>(weight %) |
|---|--------------------------------------|
| 73.00                                   | 25.00                                |
| 58.40                                   | 20.00                                |
| 43.80                                   | 15.00                                |
| 29.20                                   | 10.00                                |
| 14.60                                   | 5.00                                 |
| 2.92                                    | 1.00                                 |

**Rock-Tenn Company**  
**Permit #: 1197-AR-3**  
**AFIN: 05-00097**

#### **SECTION V: INSIGNIFICANT ACTIVITIES**

The following types of activities or emissions are deemed insignificant on the basis of size, emission rate, production rate, or activity in accordance with Group A of the Insignificant Activities list found in Regulation 18 and 19 Appendix A. Insignificant activity emission determinations rely upon the information submitted by the permittee in an application dated May 15, 2000.

| Description                   | Category                           |
|-------------------------------|------------------------------------|
| Sheet Aerator                 | A13                                |
| Sheet Cleaners Fabric Filters | Exhaust back into building         |
| Plate Shop                    | Minor emissions, grouped with PAL. |

**Rock-Tenn Company**  
**Permit #: 1197-AR-3**  
**AFIN: 05-00097**

## **SECTION VI: GENERAL CONDITIONS**

1. Any terms or conditions included in this permit which specify and reference Arkansas Pollution Control & Ecology Commission Regulation 18 or the Arkansas Water and Air Pollution Control Act (A.C.A. §8-4-101 *et seq.*) as the sole origin of and authority for the terms or conditions are not required under the Clean Air Act or any of its applicable requirements, and are not federally enforceable under the Clean Air Act. Arkansas Pollution Control & Ecology Commission Regulation 18 was adopted pursuant to the Arkansas Water and Air Pollution Control Act (A.C.A. §8-4-101 *et seq.*). Any terms or conditions included in this permit which specify and reference Arkansas Pollution Control & Ecology Commission Regulation 18 or the Arkansas Water and Air Pollution Control Act (A.C.A. §8-4-101 *et seq.*) as the origin of and authority for the terms or conditions are enforceable under this Arkansas statute.
2. Pursuant to A.C.A. §8-4-203 as referenced by A.C.A. §8-4-304 and §8-4-311, this permit shall not relieve the owner or operator of the equipment and/or the facility from compliance with all applicable provisions of the Arkansas Water and Air Pollution Control Act and the regulations promulgated thereunder.
3. Pursuant to §19.704 of the Regulations of the Arkansas Plan of Implementation for Air Pollution Control (Regulation 19) and/or A.C.A. §8-4-203 as referenced by A.C.A. §8-4-304 and §8-4-311, the Department shall be notified in writing within thirty (30) days after construction has commenced, construction is complete, the equipment and/or facility is first placed in operation, and the equipment and/or facility first reaches the target production rate.
4. Pursuant to §19.410(B) of Regulation 19 and/or §18.309(B) of the Arkansas Air Pollution Control Code (Regulation 18) and A.C.A. §8-4-203 as referenced by A.C.A. §8-4-304 and §8-4-311, construction or modification must commence within eighteen (18) months from the date of permit issuance.
5. Pursuant to §19.705 of Regulation 19 and/or §18.1004 of Regulation 18 and A.C.A. §8-4-203 as referenced by A.C.A. §8-4-304 and §8-4-311, records must be kept for five years which will enable the Department to determine compliance with the terms of this permit--such as hours of operation, throughput, upset conditions, and continuous monitoring data. The records may be used, at the discretion of the Department, to determine compliance with the conditions of the permit.

**Rock-Tenn Company**  
**Permit #: 1197-AR-3**  
**AFIN: 05-00097**

6. Pursuant to §19.705 of Regulation 19 and/or §18.1004 of Regulation 18 and A.C.A. §8-4-203 as referenced by A.C.A. §8-4-304 and §8-4-311, any reports required by any condition contained in this permit shall be certified by a responsible official and submitted to the Department at the address below.

Arkansas Department of Environmental Quality  
Air Division  
ATTN: Compliance Inspector Supervisor  
5301 Northshore Drive  
North Little Rock, AR 72118-5317

7. Pursuant to §19.702 of Regulation 19 and/or §18.1002 of Regulation 18 and A.C.A. §8-4-203 as referenced by A.C.A. §8-4-304 and §8-4-311, any equipment that is to be tested, unless stated in the Specific Conditions of this permit or by any federally regulated requirements, shall be tested with the following time frames: (1) Equipment to be constructed or modified shall be tested within sixty (60) days of achieving the maximum production rate, but in no event later than 180 days after initial start-up of the permitted source or (2) equipment already operating shall be tested according to the time frames set forth by the Department. The permittee shall notify the Department of the scheduled date of compliance testing at least fifteen (15) days in advance of such test. Compliance test results shall be submitted to the Department within thirty (30) days after the completed testing.
8. Pursuant to §19.702 of Regulation 19 and/or §18.1002 of Regulation 18 and A.C.A. §8-4-203 as referenced by A.C.A. §8-4-304 and §8-4-311, the permittee shall provide:
  - a. Sampling ports adequate for applicable test methods
  - b. Safe sampling platforms
  - c. Safe access to sampling platforms
  - d. Utilities for sampling and testing equipment
9. Pursuant to §19.303 of Regulation 19 and/or §18.1104 of Regulation 18 and A.C.A. §8-4-203 as referenced by A.C.A. §8-4-304 and §8-4-311, the equipment, control apparatus and emission monitoring equipment shall be operated within their design limitations and maintained in good condition at all times.

**Rock-Tenn Company**  
**Permit #: 1197-AR-3**  
**AFIN: 05-00097**

10. Pursuant to §19.601 of Regulation 19 and/or §18.1101 of Regulation 18 and A.C.A. §8-4-203 as referenced by A.C.A. §8-4-304 and §8-4-311, if the permittee exceeds an emission limit established by this permit, they shall be deemed in violation of said permit and shall be subject to enforcement action. The Department may forego enforcement action for emissions exceeding any limits established by this permit provided the following requirements are met:
  - a. The permittee demonstrates to the satisfaction of the Department that the emissions resulted from an equipment malfunction or upset and are not the result of negligence or improper maintenance, and that all reasonable measures have been taken to immediately minimize or eliminate the excess emissions.
  - b. The permittee reports the occurrence or upset or breakdown of equipment (by telephone, facsimile, or overnight delivery) to the Department by the end of the next business day after the occurrence or the discovery of the occurrence.
  - c. The permittee shall submit to the Department, within five business days after the occurrence or the discovery of the occurrence, a full, written report of such occurrence, including a statement of all known causes and of the scheduling and nature of the actions to be taken to minimize or eliminate future occurrences, including, but not limited to, action to reduce the frequency of occurrence of such conditions, to minimize the amount by which said limits are exceeded, and to reduce the length of time for which said limits are exceeded. If the information is included in the initial report, it need not be submitted again.
11. Pursuant to A.C.A. §8-4-203 as referenced by A.C.A. §8-4-304 and §8-4-311, the permittee shall allow representatives of the Department upon the presentation of credentials:
  - a. To enter upon the permittee's premises, or other premises under the control of the permittee, where an air pollutant source is located or in which any records are required to be kept under the terms and conditions of this permit
  - b. To have access to and copy any records required to be kept under the terms and conditions of this permit, or the Act
  - c. To inspect any monitoring equipment or monitoring method required in this permit
  - d. To sample any emission of pollutants
  - e. To perform an operation and maintenance inspection of the permitted source



12. Pursuant to A.C.A. §8-4-203 as referenced by A.C.A. §8-4-304 and §8-4-311, this permit is issued in reliance upon the statements and presentations made in the permit application. The Department has no responsibility for the adequacy or proper functioning of the equipment or control apparatus.
13. Pursuant to §19.410(A) of Regulation 19 and/or §18.309(A) of Regulation 18 and A.C.A. §8-4-203 as referenced by A.C.A. §8-4-304 and §8-4-311, this permit shall be subject to revocation or modification when, in the judgment of the Department, such revocation or modification shall become necessary to comply with the applicable provisions of the Arkansas Water and Air Pollution Control Act and the regulations promulgated thereunder.
14. Pursuant to §19.407(B) of Regulation 19 and/or §18.307(B) of Regulation 18 and A.C.A. §8-4-203 as referenced by A.C.A. §8-4-304 and §8-4-311, this permit may be transferred. An applicant for a transfer shall submit a written request for transfer of the permit on a form provided by the Department and submit the disclosure statement required by Arkansas Code Annotated §8-1-106 at least thirty (30) days in advance of the proposed transfer date. The permit will be automatically transferred to the new permittee unless the Department denies the request to transfer within thirty (30) days of the receipt of the disclosure statement. A transfer may be denied on the basis of the information revealed in the disclosure statement or other investigation or, if there is deliberate falsification or omission of relevant information.
15. Pursuant to A.C.A. §8-4-203 as referenced by A.C.A. §8-4-304 and §8-4-311, this permit shall be available for inspection on the premises where the control apparatus is located.
16. Pursuant to A.C.A. §8-4-203 as referenced by §8-4-304 and §8-4-311, this permit authorizes only those pollutant emitting activities addressed herein.
17. Pursuant to Regulation 18 and 19 and A.C.A. §8-4-203 as referenced by §8-4-304 and §8-4-311, this permit supersedes and voids all previously issued air permits for this facility.

**APPENDIX A**  
**Subpart KK—National Emission Standards for the Printing and Publishing Industry**

## e-CFR Data is current as of June 25, 2008

### **Title 40: Protection of Environment**

#### **PART 63—NATIONAL EMISSION STANDARDS FOR HAZARDOUS AIR POLLUTANTS FOR SOURCE CATEGORIES**

[Browse Previous](#) | [Browse Next](#)

### **Subpart KK—National Emission Standards for the Printing and Publishing Industry**

**Source:** 61 FR 27140, May 30, 1996, unless otherwise noted.

#### **§ 63.820 Applicability.**

(a) The provisions of this subpart apply to:

(1) Each new and existing facility that is a major source of hazardous air pollutants (HAP), as defined in 40 CFR 63.2, at which publication rotogravure, product and packaging rotogravure, or wide-web flexographic printing presses are operated, and

(2) Each new and existing facility at which publication rotogravure, product and packaging rotogravure, or wide-web flexographic printing presses are operated for which the owner or operator chooses to commit to and meets the criteria of paragraphs (a)(2)(i) and (ii) of this section for purposes of establishing the facility to be an area source of HAP with respect to this subpart. A facility which establishes area source status through some other mechanism, as described in paragraph (a)(7) of this section, is not subject to the provisions of this subpart.

(i) Use less than 9.1 Mg (10 tons) per each rolling 12-month period of each HAP at the facility, including materials used for source categories or purposes other than printing and publishing, and

(ii) Use less than 22.7 Mg (25 tons) per each rolling 12-month period of any combination of HAP at the facility, including materials used for source categories or purposes other than printing and publishing.

(3) Each facility for which the owner or operator chooses to commit to and meets the criteria stated in paragraph (a)(2) of this section shall be considered an area source, and is subject only to the provisions of §63.829(d) and §63.830(b)(1) of this subpart.

(4) Each facility for which the owner or operator commits to the conditions in paragraph (a)(2) of this section may exclude material used in routine janitorial or facility grounds maintenance, personal uses by employees or other persons, the use of products for the purpose of maintaining electric, propane, gasoline and diesel powered motor vehicles operated by the facility, and the use of HAP contained in intake water (used for processing or noncontact cooling) or intake air (used either as compressed air or for combustion).

(5) Each facility for which the owner or operator commits to the conditions in paragraph (a)(2) of this section to become an area source, but subsequently exceeds either of the thresholds in paragraph (a)(2) of this section for any rolling 12-month period (without first obtaining and complying with other limits that keep its potential to emit HAP below major source levels), shall be considered in violation of its commitment for that 12-month period and shall be considered a major source of HAP beginning the first month after the end of the 12-month period in which either of the HAP-use thresholds was exceeded. As a major source of HAP, each such facility would be subject to the provisions of this subpart as noted in paragraph (a)(1) of this section and would no longer be eligible to use the provisions of paragraph (a)(2) of this section, even if in subsequent 12-month periods the facility uses less HAP than the thresholds in paragraph (a)(2) of this section.

(6) An owner or operator of an affected source subject to paragraph (a)(2) of this section who chooses to no longer be subject to paragraph (a)(2) of this section shall notify the Administrator of such change. If, by no longer being subject to paragraph (a)(2) of this section, the facility at which the affected source is located becomes a major source:

(i) The owner or operator of an existing source must continue to comply with the HAP usage provisions of paragraph (a)(2) of this section until the source is in compliance with all relevant requirements for existing affected sources under this subpart;

(ii) The owner or operator of a new source must continue to comply with the HAP usage provisions of paragraph (a)(2) of this section until the source is in compliance with all relevant requirements for new affected sources under this subpart.

(7) Nothing in this paragraph is intended to preclude a facility from establishing area source status by limiting its potential to emit through other appropriate mechanisms that may be available through the permitting authority.

(b) This subpart does not apply to research or laboratory equipment.

[61 FR 27140, May 30, 1996, as amended at 71 FR 29799, May 24, 2006]

### **§ 63.821 Designation of affected sources.**

(a) The affected sources subject to this subpart are:

(1) All of the publication rotogravure presses and all related equipment, including proof presses, cylinder and parts cleaners, ink and solvent mixing and storage equipment, and solvent recovery equipment at a facility.

(2) All of the product and packaging rotogravure or wide-web flexographic printing presses at a facility plus any other equipment at that facility which the owner or operator chooses to include in accordance with paragraphs (a)(3) or (a)(4) of this section, except

(i) Proof presses, unless the owner or operator chooses to include proof presses in the affected source in accordance with paragraph (a)(5) of this section.

(ii) Any product and packaging rotogravure or wide-web flexographic press which is used primarily for coating, laminating, or other operations which the owner or operator chooses to exclude, provided that

(A) the sum of the total mass of inks, coatings, varnishes, adhesives, primers, solvents, thinners, reducers, and other materials applied by the press using product and packaging rotogravure print stations and the total mass of inks, coatings, varnishes, adhesives, primers, solvents, thinners, reducers, and other materials applied by the press using wide-web flexographic print stations in each month never exceeds 5 percent of the total mass of inks, coatings, varnishes, adhesives, primers, solvents, thinners, reducers, and other materials applied by the press in that month, including all inboard and outboard stations; and

(B) The owner or operator maintains records as required in §63.829(f).

(3) The owner or operator of an affected source, as defined in paragraph (a)(2) of this section, may elect to include in that affected source stand-alone equipment subject to the following provisions:

(i) Stand-alone equipment meeting any of the criteria specified in this subparagraph is eligible for inclusion:

(A) The stand-alone equipment and one or more product and packaging rotogravure or wide-web flexographic presses are used to apply solids-containing materials to the same web or substrate; or

(B) The stand-alone equipment and one or more product and packaging rotogravure or wide-web flexographic presses apply a common solids-containing material; or

(C) A common control device is used to control organic HAP emissions from the stand-alone equipment and from one or more product and packaging rotogravure or wide-web flexographic printing presses;

(ii) All eligible stand-alone equipment located at the facility is included in the affected source; and

(iii) No product and packaging rotogravure or wide-web flexographic presses are excluded from the affected source under the provisions of paragraph (a)(2)(ii) of this section.

(4) The owner or operator of an affected source, as defined in paragraph (a)(2) of this section, may elect to include in that affected source narrow-web flexographic presses subject to the following provisions:

(i) Each narrow-web flexographic press meeting any of the criteria specified in this subparagraph is eligible for inclusion:

(A) The narrow-web flexographic press and one or more product and packaging rotogravure or wide-web flexographic presses are used to apply solids containing material to the same web or substrate; or

(B) The narrow-web flexographic press and one or more product and packaging rotogravure or wide-web flexographic presses apply a common solids-containing material; or

(C) A common control device is used to control organic HAP emissions from the narrow-web flexographic press and from one or more product and packaging rotogravure or wide-web flexographic presses; and

(ii) All eligible narrow-web flexographic presses located at the facility are included in the affected source.

(5) The owner or operator of an affected source, as defined in paragraph (a)(2) of this section, may elect to include in that affected source rotogravure proof presses or flexographic proof presses subject to the following provisions:

(i) Each proof press meeting any of the criteria specified in this subparagraph is eligible for inclusion.

(A) The proof press and one or more product and packaging rotogravure or wide-web flexographic presses apply a common solids-containing material; or

(B) A common control device is used to control organic HAP emissions from the proof press and from one or more product and packaging rotogravure or wide-web flexographic presses; and

(ii) All eligible proof presses located at the facility are included in the affected source.

(6) Affiliated operations such as mixing or dissolving of ink or coating ingredients prior to application; ink or coating mixing for viscosity adjustment, color tint or additive blending, or pH adjustment; cleaning of ink or coating lines and line parts; handling and storage of inks, coatings, and solvents; and conveyance and treatment of wastewater are part of the printing and publishing industry source category, but are not part of the product and packaging rotogravure or wide-web flexographic printing affected source.

(7) Other presses are part of the printing and publishing industry source category, but are not part of the publication rotogravure affected source or the product and packaging rotogravure or wide-web flexographic printing affected source and are, therefore, exempt from the requirements of this subpart except as provided in paragraph (a)(3) of this section.

(8) Narrow web-flexographic presses are part of the printing and publishing industry source category, but are not part of the publication rotogravure affected source or the product and packaging rotogravure or wide-web flexographic printing affected source and are, therefore, exempt from the requirements of this subpart except as provided in paragraphs (a)(3) through (5) of this section.

(b) Each product and packaging rotogravure or wide-web flexographic printing affected source at a facility that is a major source of HAP, as defined in 40 CFR 63.2, that complies with the criteria of paragraphs (b)(1) or (b)(2) on and after the applicable compliance date as specified in §63.826 of this subpart is subject only to the requirements of §63.829(e) and §63.830(b)(1) of this subpart.

(1) The owner or operator of the affected source applies no more than 500 kilograms (kg) per month, for every month, of inks, coatings, varnishes, adhesives, primers, solvents, thinners, reducers, and other materials on product and packaging rotogravure or wide-web flexographic printing presses, or

(2) The owner or operator of the affected source applies no more than 400 kg per month, for every month, of organic HAP on product and packaging rotogravure or wide-web flexographic printing presses.

(c) Each product and packaging rotogravure or wide-web flexographic printing affected source at a facility that is a major source of HAP, as defined in 40 CFR 63.2, that complies with neither the criterion of paragraph (b)(1) nor (b)(2) of this section in any month after the applicable compliance date as specified in §63.826 of this subpart is, starting with that month, subject to all relevant requirements of this subpart and is no longer eligible to use the provisions of paragraph (b) of this section, even if in subsequent months the affected source does comply with the criteria of paragraphs (b)(1) or (b)(2) of this section.

[61 FR 27140, May 30, 1996, as amended at 71 FR 29799, May 24, 2006]

## **§ 63.822 Definitions.**

(a) All terms used in this subpart that are not defined below have the meaning given to them in the CAA and in subpart A of this part.

*Always-controlled work station* means a work station associated with a dryer from which the exhaust is delivered to a control device, with no provision for the dryer exhaust to bypass the control device. Sampling lines for analyzers and relief valves needed for safety purposes are not considered bypass lines.

*Capture efficiency* means the fraction of all organic HAP emissions generated by a process that are delivered to a control device, expressed as a percentage.

*Capture system* means a hood, enclosed room, or other means of collecting organic HAP emissions into a closed-vent system that exhausts to a control device.

*Car-seal* means a seal that is placed on a device that is used to change the position of a valve or damper (e.g., from open to closed) in such a way that the position of the valve or damper cannot be changed without breaking the seal.

*Certified product data sheet (CPDS)* means documentation furnished by suppliers of inks, coatings, varnishes, adhesives, primers, solvents, and other materials or by an independent third party that provides the organic HAP weight fraction of these materials determined in accordance with §63.827(b), or the volatile matter weight fraction or solids weight fraction determined in accordance with §63.827(c). A material safety data sheet (MSDS) may serve as a CPDS provided the MSDS meets the data requirements of §63.827(b) and (c). The purpose of the CPDS is to assist the owner or operator in demonstrating compliance with the emission limitations presented in §§63.824–63.825.

*Coating* means material applied onto or impregnated into a substrate for decorative, protective, or functional purposes. Such materials include, but are not limited to, solvent-borne coatings, waterborne coatings, wax coatings, wax laminations, extrusion coatings, extrusion laminations, 100 percent solid adhesives, ultra-violet cured coatings, electron beam cured coatings, hot melt coatings, and cold seal coatings. Materials used to form unsupported substrates such as calendaring of vinyl, blown film, cast film, extruded film, and coextruded film are not considered coatings.

*Control device* means a device such as a carbon adsorber or oxidizer which reduces the organic HAP in an exhaust gas by recovery or by destruction.

*Control device efficiency* means the ratio of organic HAP emissions recovered or destroyed by a control device to the total organic HAP emissions that are introduced into the control device, expressed as a percentage.

*Day* means a 24-consecutive-hour period.

*Facility* means all contiguous or adjoining property that is under common ownership or control, including properties that are separated only by a road or other public right-of-way.

*Flexible packaging* means any package or part of a package the shape of which can be readily changed. Flexible packaging includes, but is not limited to, bags, pouches, labels, liners and wraps utilizing paper, plastic, film, aluminum foil, metalized or coated paper or film, or any combination of these materials.

*Flexographic press* means an unwind or feed section, which may include more than one unwind or feed station (such as on a laminator), a series of individual work stations, one or more of which is a flexographic print station, any dryers (including interstage dryers and overhead tunnel dryers) associated with the work stations, and a rewind, stack, or collection section. The work stations may be oriented vertically, horizontally, or around the circumference of a single large impression cylinder. Inboard and outboard work stations, including those employing any other technology, such as rotogravure, are included if they are capable of printing or coating on the same substrate. A publication rotogravure press with one or more flexographic imprinters is not a flexographic press.

*Flexographic print station* means a print station on which a flexographic printing operation is conducted. A flexographic print station includes an anilox roller that transfers material to a raised image (type or art) on a plate cylinder. The material is then transferred from the image on the plate cylinder to the web or sheet to be printed. A flexographic print station may include a fountain roller to transfer material from the reservoir to the anilox roller, or material may be transferred directly from the reservoir to the anilox roller. The materials applied are of a fluid, rather than paste, consistency.

*HAP applied* means the organic HAP content of all inks, coatings, varnishes, adhesives, primers, solvent, and other materials applied to a substrate by a product and packaging rotogravure or wide-web flexographic printing affected source.

*HAP used* means the organic HAP applied by a publication rotogravure printing affected source, including all organic HAP used for cleaning, parts washing, proof presses, and all organic HAP emitted during tank loading, ink mixing, and storage.

*Intermittently-controllable work station* means a work station associated with a dryer with provisions for the dryer exhaust to be delivered to or diverted from a control device depending on the position of a valve or damper. Sampling lines for analyzers and relief valves needed for safety purposes are not considered bypass lines.

*Month* means a calendar month or a prespecified period of 28 days to 35 days.

*Narrow-web flexographic press* means a flexographic press that is not capable of printing substrates greater than 18 inches in width and that does not also meet the definition of rotogravure press (i.e., it has no rotogravure print stations).

*Never-controlled work station* means a work station which is not equipped with provisions by which any emissions, including those in the exhaust from any associated dryer, may be delivered to a control device.

*Other press* means a lithographic press, letterpress press, or screen printing press that does not meet the definition of rotogravure press or flexographic press (i.e., it has no rotogravure print stations and no flexographic print stations), and that does not print on fabric or other textiles as defined in the Printing, Coating, and Dyeing of Fabrics and Other Textiles NESHAP (40 CFR part 63, subpart OOOO), wood furniture components as defined in the Wood Furniture Manufacturing Operations NESHAP (40 CFR part 63, subpart JJ) or wood building products as defined in the Surface Coating of Wood Building Products NESHAP (40 CFR part 63, subpart QQQQ).

*Overall Organic HAP control efficiency* means the total efficiency of a control system, determined either by:

- (1) The product of the capture efficiency and the control device efficiency or
- (2) A liquid-liquid material balance.

*Print station* means a work station on which a printing operation is conducted.

*Printing operation* means the formation of words, designs, or pictures on a substrate other than wood furniture components as defined in the Wood Furniture Manufacturing Operations NESHAP (40 CFR part 63, subpart JJ), wood building products as defined in the Surface Coating of Wood Building Products NESHAP (40 CFR part 63, subpart QQQQ), and fabric or other textiles as defined in the Printing, Coating, and Dyeing of Fabric and Other Textiles NESHAP (40 CFR part 63, subpart OOOO), except for fabric or other textiles for use in flexible packaging.

*Product and packaging rotogravure printing* means the production, on a rotogravure press, of any printed substrate not otherwise defined as publication rotogravure printing. This includes, but is not limited to, folding cartons, flexible packaging, labels and wrappers, gift wraps, wall and floor coverings, upholstery, decorative laminates, and tissue products.

*Proof press* means any press which prints only non-saleable items used to check the quality of image formation of rotogravure cylinders or flexographic plates; substrates such as paper, plastic film, metal foil, or vinyl; or ink, coating varnish, adhesive, primer, or other solids-containing material.

*Publication rotogravure press* means a rotogravure press used for publication rotogravure printing. A publication rotogravure press may include one or more flexographic imprinters. A publication rotogravure press with one or more flexographic imprinters is not a flexographic press.

*Publication rotogravure printing* means the production, on a rotogravure press, of the following saleable paper products:

- (1) Catalogues, including mail order and premium,
- (2) Direct mail advertisements, including circulars, letters, pamphlets, cards, and printed envelopes,
- (3) Display advertisements, including general posters, outdoor advertisements, car cards, window posters; counter and floor displays; point of purchase and other printed display material,
- (4) Magazines,

(5) Miscellaneous advertisements, including brochures, pamphlets, catalog sheets, circular folders, announcements, package inserts, book jackets, market circulars, magazine inserts, and shopping news,

(6) Newspapers, magazine and comic supplements for newspapers, and preprinted newspaper inserts, including hi-fi and spectacular rolls and sections,

(7) Periodicals, and

(8) Telephone and other directories, including business reference services.

*Research or laboratory equipment* means any equipment for which the primary purpose is to conduct research and development into new processes and products, where such equipment is operated under the close supervision of technically trained personnel and is not engaged in the manufacture of products for commercial sale in commerce, except in a de minimis manner.

*Rotogravure press* means an unwind or feed section, which may include more than one unwind or feed station (such as on a laminator), a series of individual work stations, one or more of which is a rotogravure print station, any dryers associated with the work stations, and a rewind, stack, or collection section. Inboard and outboard work stations, including those employing any other technology, such as flexography, are included if they are capable of printing or coating on the same substrate.

*Rotogravure print station* means a print station on which a rotogravure printing operation is conducted. A rotogravure print station includes a rotogravure cylinder and supply for ink or other solids containing material. The image (type and art) to be printed is etched or engraved below the surface of the rotogravure cylinder. On a rotogravure cylinder the printing image consists of millions of minute cells.

*Stand-alone equipment* means an unwind or feed section, which may include more than one unwind or feed station (such as on a laminator); a series of one or more work stations and any associated dryers; and a rewind, stack, or collection section that is not part of a product and packaging rotogravure or wide-web flexographic press. Stand-alone equipment is sometimes referred to as "off-line" equipment.

*Wide-web flexographic press* means a flexographic press capable of printing substrates greater than 18 inches in width.

*Work station* means a unit on which material is deposited onto a substrate.

(b) The symbols used in equations in this subpart are defined as follows:

(1)  $C_{ahi}$ =the monthly average, as-applied, organic HAP content of solids-containing material,  $i$ , expressed as a weight-fraction, kg/kg.

(2)  $C_{asi}$ =the monthly average, as applied, solids content, of solids-containing material,  $i$ , expressed as a weight-fraction, kg/kg.

(3)  $C_{hi}$ =the organic HAP content of ink or other solids-containing material,  $i$ , expressed as a weight-fraction, kg/kg.

(4)  $C_{hij}$ =the organic HAP content of solvent  $j$ , added to solids-containing material  $i$ , expressed as a weight-fraction, kg/kg.

(5)  $C_{hj}$ =the organic HAP content of solvent  $j$ , expressed as a weight-fraction, kg/kg.

(6) [Reserved]

(7)  $C_{si}$ =the solids content of ink or other material,  $i$ , expressed as a weight-fraction, kg/kg.

(8)  $C_{vi}$ =the volatile matter content of ink or other material,  $i$ , expressed as a weight-fraction, kg/kg.

(9)  $E$ =the organic volatile matter control efficiency of the control device, percent.

(10)  $F$ =the organic volatile matter capture efficiency of the capture system, percent.



- (11)  $G_i$ =the mass fraction of each solids containing material,  $i$ , which was applied at 20 weight-percent or greater solids content, on an as-applied basis, kg/kg.
- (12)  $H$  = the monthly organic HAP emitted, kg.
- (13)  $H_a$ =the monthly allowable organic HAP emissions, kg.
- (14)  $H_L$ =the monthly average, as-applied, organic HAP content of all solids-containing materials applied at less than 0.04 kg organic HAP per kg of material applied, kg/kg.
- (15)  $H_s$ =the monthly average, as-applied, organic HAP to solids ratio, kg organic HAP/kg solids applied.
- (16)  $H_{si}$ =the as-applied, organic HAP to solids ratio of material  $i$ .
- (17)  $L$ =the mass organic HAP emission rate per mass of solids applied, kg/kg.
- (18)  $M_{bi}$ =the sum of the mass of solids-containing material,  $i$ , applied on intermittently-controllable work stations operating in bypass mode and the mass of solids-containing material,  $i$ , applied on never-controlled work stations, in a month, kg.
- (19)  $M_{bj}$ =the sum of the mass of solvent, thinner, reducer, diluent, or other non-solids-containing material,  $j$ , applied on intermittently-controllable work stations operating in bypass mode and the mass of solvent, thinner, reducer, diluent, or other non-solids-containing material,  $j$ , applied on never-controlled work stations, in a month, kg.
- (20)  $M_{ci}$ =the sum of the mass of solids-containing material,  $i$ , applied on intermittently-controllable work stations operating in controlled mode and the mass of solids-containing material,  $i$ , applied on always-controlled work stations, in a month, kg.
- (21)  $M_{cj}$ =the sum of the mass of solvent, thinner, reducer, diluent, or other non-solids-containing material,  $j$ , applied on intermittently-controllable work stations operating in controlled mode and the mass of solvent, thinner, reducer, diluent, or other non-solids-containing material,  $j$ , applied on always-controlled work stations in a month, kg.
- (22) [Reserved]
- (23)  $M_{fi}$ =the organic volatile matter mass flow rate at the inlet to the control device, kg/h.
- (24)  $M_{fo}$ =the organic volatile matter mass flow rate at the outlet of the control device, kg/h.
- (25)  $M_{hu}$ =the mass of organic HAP used in a month, kg.
- (26)  $M_i$ =the mass of ink or other material,  $i$ , applied in a month, kg.
- (27)  $M_{ij}$ =the mass of solvent, thinner, reducer, diluent, or other non-solids-containing material,  $j$ , added to solids-containing material,  $i$ , in a month, kg.
- (28)  $M_j$ =the mass of solvent, thinner, reducer, diluent, or other non-solids-containing material,  $j$ , applied in a month, kg.
- (29)  $M_{Lj}$ =the mass of solvent, thinner, reducer, diluent, or other non-solids-containing material,  $j$ , added to solids-containing materials which were applied at less than 20 weight-percent solids content, on an as-applied basis, in a month, kg.
- (30)  $M_{vr}$ =the mass of volatile matter recovered in a month, kg.
- (31)  $M_{vu}$ =the mass of volatile matter, including water, used in a month, kg.
- (32) [Reserved]
- (33)  $n$ =the number of organic compounds in the vent gas.

- (34) p=the number of different inks, coatings, varnishes, adhesives, primers, and other materials applied in a month.
- (35) q=the number of different solvents, thinners, reducers, diluents, or other non-solids-containing materials applied in a month.
- (36) [Reserved]
- (37) R=the overall organic HAP control efficiency, percent.
- (38) R<sub>e</sub>=the overall effective organic HAP control efficiency for publication rotogravure, percent.
- (39) R<sub>v</sub>=the organic volatile matter collection and recovery efficiency, percent.
- (40) S=the mass organic HAP emission rate per mass of material applied, kg/kg.
- (41) 0.0416=conversion factor for molar volume, kg-mol/m<sup>3</sup> (@ 293 K and 760 mmHg).
- [61 FR 27140, May 30, 1996, as amended at 71 FR 29800, May 24, 2006]

### **§ 63.823 Standards: General.**

Table 1 to this subpart provides cross references to the 40 CFR part 63, subpart A, general provisions, indicating the applicability of the general provisions requirements to this subpart KK.

### **§ 63.824 Standards: Publication rotogravure printing.**

(a) Each owner or operator of any publication rotogravure printing affected source that is subject to the requirements of this subpart shall comply with these requirements on and after the compliance dates as specified in §63.826 of this subpart.

(b) Each publication rotogravure affected source shall limit emissions of organic HAP to no more than eight percent of the total volatile matter used each month. The emission limitation may be achieved by overall control of at least 92 percent of organic HAP used, by substitution of non-HAP materials for organic HAP, or by a combination of capture and control technologies and substitution of materials. To demonstrate compliance, each owner or operator shall follow the procedure in paragraph (b)(1) of this section when emissions from the affected source are controlled by a solvent recovery device, the procedure in paragraph (b)(2) of this section when emissions from the affected source are controlled by an oxidizer, and the procedure in paragraph (b)(3) of this section when no control device is used.

(1) Each owner or operator using a solvent recovery device to control emissions shall demonstrate compliance by showing that the HAP emission limitation is achieved by following the procedures in either paragraph (b)(1)(i) or (b)(1)(ii) of this section:

(i) Perform a liquid-liquid material balance for each month as follows:

(A) Measure the mass of each ink, coating, varnish, adhesive, primer, solvent, and other material used by the affected source during the month.

(B) Determine the organic HAP content of each ink, coating, varnish, adhesive, primer, solvent and other material used by the affected source during the month following the procedure in §63.827(b)(1).

(C) Determine the volatile matter content, including water, of each ink, coating, varnish, adhesive, primer, solvent, and other material used by the affected source during the month following the procedure in §63.827(c)(1).

(D) Install, calibrate, maintain and operate, according to the manufacturer's specifications, a device that indicates the cumulative amount of volatile matter recovered by the solvent recovery device on a monthly basis. The device shall be initially certified by the manufacturer to be accurate to within ±2.0 percent.

(E) Measure the amount of volatile matter recovered for the month.

(F) Calculate the overall effective organic HAP control efficiency ( $R_e$ ) for the month using Equation 1:

$$R_e = (100) \frac{M_{vu} - M_{ku} + [(M_{vr})(M_{ku} / M_{vu})]}{M_{vu}} \quad Eq\ 1$$

For the purposes of this calculation, the mass fraction of organic HAP present in the recovered volatile matter is assumed to be equal to the mass fraction of organic HAP present in the volatile matter used.

(G) The affected source is in compliance for the month, if  $R_e$  is at least 92 percent each month.

(ii) Use continuous emission monitors, conduct an initial performance test of capture efficiency, and continuously monitor a site specific operating parameter to assure capture efficiency as specified in paragraphs (b)(1)(ii)(A) through (b)(1)(ii)(E) of this section:

(A) Install continuous emission monitors to collect the data necessary to calculate the total organic volatile matter mass flow in the gas stream entering and the total organic volatile matter mass flow in the gas stream exiting the solvent recovery device for each month such that the percent control efficiency (E) of the solvent recovery device can be calculated for the month. This requires continuous emission monitoring of the total organic volatile matter concentration in the gas stream entering the solvent recovery device, the total organic volatile matter concentration in the gas stream exiting the solvent recovery device, and the volumetric gas flow rate through the solvent recovery device. A single continuous volumetric gas flow measurement should be sufficient for a solvent recovery device since the inlet and outlet volumetric gas flow rates for a solvent recovery device are essentially equal. Each month's individual inlet concentration values and corresponding individual gas flow rate values are multiplied and then summed to get the total organic volatile matter mass flow in the gas stream entering the solvent recovery device for the month. Each month's individual outlet concentration values and corresponding individual gas flow rate values are multiplied and then summed to get the total organic volatile matter mass flow in the gas stream exiting the solvent recovery device for the month.

(B) Determine the percent capture efficiency (F) of the capture system according to §63.827(e).

(C) Calculate the overall effective organic HAP control efficiency ( $R_e$ ) achieved for each month using Equation 2.

$$R_e = (100) \frac{M_{vu} - M_{ku} + [(E/100)(F/100)M_{ku}]}{M_{vu}} \quad Eq\ 2$$

(D) Install, calibrate, operate and maintain the instrumentation necessary to measure continuously the site-specific operating parameter established in accordance with §63.828(a)(5) whenever a publication rotogravure printing press is operated.

(E) The affected source is in compliance with the requirement for the month if  $R_e$  is at least 92 percent, and the capture device is operated at an average value greater than, or less than (as appropriate) the operating parameter value established in accordance with §63.828(a)(5) for each three-hour period.

(2) Each owner or operator using an oxidizer to control emissions shall demonstrate compliance by showing that the HAP emission limitation is achieved by following the procedure in either paragraph (b)(2)(i) or (b)(2)(ii) of this section:

(i) Demonstrate initial compliance through performance tests and continuing compliance through continuous monitoring as follows:

(A) Determine the oxidizer destruction efficiency (E) using the procedure in §63.827(d).

(B) Determine the capture efficiency (F) using the procedure in §63.827(e).

(C) [Reserved]

(D) Calculate the overall effective organic HAP control efficiency ( $R_e$ ) achieved using Equation 2.

(E) The affected source is in initial compliance if  $R_{\text{is}}$  is at least 92 percent. Demonstration of continuing compliance is achieved by continuous monitoring of an appropriate oxidizer operating parameter in accordance with §63.828(a)(4), and by continuous monitoring of an appropriate capture system monitoring parameter in accordance with §63.828(a)(5). The affected source is in continuing compliance if the capture device is operated at an average value greater than or less than (as appropriate) the operating parameter value established in accordance with §63.828(a)(5), and

( 1 ) if an oxidizer other than a catalytic oxidizer is used, the average combustion temperature for all three-hour periods is greater than or equal to the average combustion temperature established under §63.827(d), or

( 2 ) if a catalytic oxidizer is used, the average catalyst bed inlet temperature for all three-hour periods is greater than or equal to the average catalyst bed inlet temperature established in accordance with §63.827(d).

(ii) Use continuous emission monitors, conduct an initial performance test of capture efficiency, and continuously monitor a site specific operating parameter to assure capture efficiency. The percent control efficiency of the oxidizer shall be demonstrated in accordance with the requirements of paragraph (b)(1)(ii) of this section except that separate continuous measurements of the inlet volumetric gas flow rate and the outlet volumetric gas flow rate are required for an oxidizer.

(3) To demonstrate compliance without the use of a control device, each owner or operator shall compare the mass of organic HAP used to the mass of volatile matter used each month, as specified in paragraphs (b)(3)(i) through (b)(3)(iv) of this section:

(i) Measure the mass of each ink, coating, varnish, adhesive, primer, solvent, and other material used in the affected source during the month.

(ii) Determine the organic HAP content of each ink, coating, varnish, adhesive, primer, solvent, and other material used during the month following the procedure in §63.827(b)(1), and

(iii) Determine the volatile matter content, including water, of each ink, coating, varnish, adhesive, primer, solvent, and other material used during the month following the procedure in §63.827(c)(1).

(iv) The affected source is in compliance for the month if the mass of organic HAP used does not exceed eight percent of the mass of volatile matter used.

[61 FR 27140, May 30, 1996, as amended at 71 FR 29801, May 24, 2006]

### **§ 63.825 Standards: Product and packaging rotogravure and wide-web flexographic printing.**

(a) Each owner or operator of any product and packaging rotogravure or wide-web flexographic printing affected source that is subject to the requirements of this subpart shall comply with these requirements on and after the compliance dates as specified in §63.826 of this subpart.

(b) Each product and packaging rotogravure or wide-web flexographic printing affected source shall limit organic HAP emissions to no more than 5 percent of the organic HAP applied for the month; or to no more than 4 percent of the mass of inks, coatings, varnishes, adhesives, primers, solvents, reducers, thinners, and other materials applied for the month; or to no more than 20 percent of the mass of solids applied for the month; or to a calculated equivalent allowable mass based on the organic HAP and solids contents of the inks, coatings, varnishes, adhesives, primers, solvents, reducers, thinners, and other materials applied for the month. The owner or operator of each product and packaging rotogravure or wide-web flexographic printing affected source shall demonstrate compliance with this standard by following one of the procedures in paragraphs (b)(1) through (b)(10) of this section:

(1) Demonstrate that each ink, coating, varnish, adhesive, primer, solvent, diluent, reducer, thinner, and other material applied during the month contains no more than 0.04 weight-fraction organic HAP, on an as-purchased basis, as determined in accordance with §63.827(b)(2).

(2) Demonstrate that each ink, coating, varnish, adhesive, primer, and other solids-containing material applied during the month contains no more than 0.04 weight-fraction organic HAP, on a monthly average as-applied basis as determined in accordance with paragraphs (b)(2)(i)–(ii) of this section. The owner or operator shall calculate the as-applied HAP content of materials which are reduced, thinned, or diluted prior to application, as follows:

(i) Determine the organic HAP content of each ink, coating, varnish, adhesive, primer, solvent, diluent, reducer, thinner, and other material applied on an as-purchased basis in accordance with §63.827(b)(2).

(ii) Calculate the monthly average as-applied organic HAP content,  $C_{ahi}$  of each ink, coating, varnish, adhesive, primer, and other solids-containing material using Equation 3.

$$C_{ahi} = \frac{\left( C_{hi} M_i + \sum_{j=1}^q C_{hj} M_j \right)}{M_i + \sum_{j=1}^q M_j} \quad Eq\ 3$$

(3)(i) Demonstrate that each ink, coating, varnish, adhesive, primer, and other solids-containing material applied, either

(A) Contains no more than 0.04 weight-fraction organic HAP on a monthly average as-applied basis, or

(B) Contains no more than 0.20 kg of organic HAP per kg of solids applied, on a monthly average as-applied basis.

(ii) The owner or operator may demonstrate compliance in accordance with paragraphs (b)(3)(ii) (A)–(C) of this section.

(A) Use the procedures of paragraph (b)(2) of this section to determine which materials meet the requirements of paragraph (b)(3)(i)(A) of this section,

(B) Determine the as-applied solids content following the procedure in §63.827(c)(2) of all materials which do not meet the requirements of paragraph (b)(3)(i)(A) of this section. The owner or operator may calculate the monthly average as-applied solids content of materials which are reduced, thinned, or diluted prior to application, using Equation 4, and

$$C_{asi} = \frac{C_{si} M_i}{M_i + \sum_{j=1}^q M_j} \quad Eq\ 4$$

(C) Calculate the as-applied organic HAP to solids ratio,  $H_{si}$ , for all materials which do not meet the requirements of paragraph (b)(3)(i)(A) of this section, using Equation 5.

$$H_{si} = \frac{C_{ahi}}{C_{asi}} \quad Eq\ 5$$

(4) Demonstrate that the monthly average as-applied organic HAP content,  $H_L$ , of all materials applied is less than 0.04 kg HAP per kg of material applied, as determined by Equation 6.

$$H_L = \frac{\sum_{i=1}^p M_i C_{hi} + \sum_{j=1}^q M_j C_{hj}}{\sum_{i=1}^p M_i + \sum_{j=1}^q M_j} \quad Eq\ 6$$

(5) Demonstrate that the monthly average as-applied organic HAP content on the basis of solids applied,  $H_s$ , is less than 0.20 kg HAP per kg solids applied as determined by Equation 7.

$$H_s = \frac{\sum_{i=1}^p M_i C_{hi} + \sum_{j=1}^q M_j C_{hj}}{\sum_{i=1}^p M_i C_{si}} \quad Eq\ 7$$

(6) Demonstrate that the total monthly organic HAP applied,  $H_{app}$ , as determined by Equation 8, is less than the calculated equivalent allowable organic HAP,  $H_a$ , as determined by paragraph (e) of this section.

$$H_{app} = \sum_{i=1}^p M_i C_{hi} + \sum_{j=1}^q M_j C_{hj} \quad \text{Eq. 8}$$

Where:

$H_{app}$  = Total monthly organic HAP applied, kg.

(7) Operate a capture system and control device and demonstrate an overall organic HAP control efficiency of at least 95 percent for each month. If the affected source operates more than one capture system or more than one control device, and has only always-controlled work stations, then the owner or operator shall demonstrate compliance in accordance with the provisions of either paragraph (f) or (h) of this section. If the affected source operates one or more never-controlled work stations or one or more intermittently-controllable work stations, then the owner or operator shall demonstrate compliance in accordance with the provisions of paragraph (f) of this section. Otherwise, the owner or operator shall demonstrate compliance in accordance with the procedure in paragraph (c) of this section when emissions from the affected source are controlled by a solvent recovery device or the procedure in paragraph (d) of this section when emissions are controlled by an oxidizer.

(8) Operate a capture system and control device and limit the organic HAP emission rate to no more than 0.20 kg organic HAP emitted per kg solids applied as determined on a monthly average as-applied basis. If the affected source operates more than one capture system, more than one control device, one or more never-controlled work stations, or one or more intermittently-controllable work stations, then the owner or operator shall demonstrate compliance in accordance with the provisions of paragraph (f) of this section. Otherwise, the owner or operator shall demonstrate compliance following the procedure in paragraph (c) of this section when emissions from the affected source are controlled by a solvent recovery device or the procedure in paragraph (d) of this section when emissions are controlled by an oxidizer.

(9) Operate a capture system and control device and limit the organic HAP emission rate to no more than 0.04 kg organic HAP emitted per kg material applied as determined on a monthly average as-applied basis. If the affected source operates more than one capture system, more than one control device, one or more never-controlled work stations, or one or more intermittently-controllable work stations, then the owner or operator shall demonstrate compliance in accordance with the provisions of paragraph (f) of this section. Otherwise, the owner or operator shall demonstrate compliance following the procedure in paragraph (c) of this section when emissions from the affected source are controlled by a solvent recovery device or the procedure in paragraph (d) of this section when emissions are controlled by an oxidizer.

(10) Operate a capture system and control device and limit the monthly organic HAP emissions to less than the allowable emissions as calculated in accordance with paragraph (e) of this section. If the affected source operates more than one capture system, more than one control device, one or more never-controlled work stations, or one or more intermittently-controllable work stations, then the owner or operator shall demonstrate compliance in accordance with the provisions of paragraph (f) of this section. Otherwise, the owner or operator shall demonstrate compliance following the procedure in paragraph (c) of this section when emissions from the affected source are controlled by a solvent recovery device or the procedure in paragraph (d) of this section when emissions are controlled by an oxidizer.

(c) To demonstrate compliance with the overall organic HAP control efficiency requirement in §63.825(b)(7) or the organic HAP emissions limitation requirements in §63.825(b)(8)–(10), each owner or operator using a solvent recovery device to control emissions shall show compliance by following the procedures in either paragraph (c)(1) or (c)(2) of this section:

(1) Perform a liquid-liquid material balance for each and every month as follows:

(i) Measure the mass of each ink, coating, varnish, adhesive, primer, solvent and other material applied on the press or group of presses controlled by a common solvent recovery device during the month.

(ii) If demonstrating compliance on the basis of organic HAP emission rate based on solids applied, organic HAP emission rate based on material applied or emission of less than the calculated allowable organic HAP, determine the organic HAP content of each ink, coating, varnish, adhesive, primer, solvent, and other material applied during the month following the procedure in §63.827(b)(2).

(iii) Determine the volatile matter content of each ink, coating, varnish, adhesive, primer, solvent, and other material applied during the month following the procedure in §63.827(c)(2).

(iv) If demonstrating compliance on the basis of organic HAP emission rate based on solids applied or emission of less than the calculated allowable organic HAP, determine the solids content of each ink, coating, varnish, adhesive, primer, solvent, and other material applied during the month following the procedure in §63.827(c)(2).

(v) Install, calibrate, maintain, and operate according to the manufacturer's specifications, a device that indicates the cumulative amount of volatile matter recovered by the solvent recovery device on a monthly basis. The device shall be initially certified by the manufacturer to be accurate to within ±2.0 percent.

(vi) Measure the amount of volatile matter recovered for the month.

(vii) Calculate the volatile matter collection and recovery efficiency,  $R_v$ , using Equation 9.

$$R_v = 100 \frac{M_v}{\sum_{i=1}^p M_i C_{vi} + \sum_{j=1}^q M_j} \quad Eq\ 9$$

(viii) If demonstrating compliance on the basis of organic HAP emission rate based on solids applied, organic HAP emission rate based on material applied or emission of less than the calculated allowable organic HAP, calculate the organic HAP emitted during the month,  $H$ , using Equation 10.

$$H = \left[ 1 - \frac{R_v}{100} \right] \left[ \sum_{i=1}^p \left( C_{ki} M_i + \sum_{j=1}^q C_{kij} M_{ij} \right) \right] \quad Eq\ 10$$

(ix) If demonstrating compliance on the basis of organic HAP emission rate based on solids applied, calculate the organic HAP emission rate based on solids applied,  $L$ , using Equation 11.

$$L = \frac{H}{\sum_{i=1}^p C_{si} M_i} \quad Eq\ 11$$

(x) If demonstrating compliance on the basis of organic HAP emission rate based on materials applied, calculate the organic HAP emission rate based on material applied,  $S$ , using Equation 12.

$$S = \frac{H}{\sum_{i=1}^p \left[ M_i + \sum_{j=1}^q M_{ij} \right]} \quad Eq\ 12$$

(xi) The affected source is in compliance if

(A) The organic volatile matter collection and recovery efficiency,  $R_v$ , is 95 percent or greater, or

(B) The organic HAP emission rate based on solids applied,  $L$ , is 0.20 kg organic HAP per kg solids applied or less, or

(C) the organic HAP emission rate based on material applied,  $S$ , is 0.04 kg organic HAP per kg material applied or less, or

(D) the organic HAP emitted during the month,  $H$ , is less than the calculated allowable organic HAP,  $H_a$ , as determined using paragraph (e) of this section.

(2) Use continuous emission monitors, conduct an initial performance test of capture efficiency, and continuously monitor a site specific operating parameter to assure capture efficiency following the procedures in paragraphs (c)(2)(i) through (c)(2)(xi) of this section:

(i) If demonstrating compliance on the basis of organic HAP emission rate based on solids applied, organic HAP emission rate based on materials applied, or emission of less than the calculated allowable organic HAP, measure the mass of each ink, coating, varnish, adhesive, primer, solvent, and other material applied on the press or group of presses controlled by a common control device during the month.

(ii) If demonstrating compliance on the basis of organic HAP emission rate based on solids applied, organic HAP emission rate based on material applied or emission of less than the calculated allowable organic HAP, determine the organic HAP content of each ink, coating, varnish, adhesive, primer, solvent, and other material applied during the month following the procedure in §63.827(b)(2).

(iii) Install continuous emission monitors to collect the data necessary to calculate the total organic volatile matter mass flow in the gas stream entering and the total organic volatile mass flow in the gas stream exiting the solvent recovery device for each month such that the percent control efficiency (E) of the solvent recovery device can be calculated for the month. This requires continuous emission monitoring of the total organic volatile matter concentration in the gas stream entering the solvent recovery device, the total organic volatile matter concentration in the gas stream exiting the solvent recovery device, and the volumetric gas flow rate through the solvent recovery device. A single continuous volumetric gas flow measurement should be sufficient for a solvent recovery device since the inlet and outlet volumetric gas flow rates for a solvent recovery device are essentially equal. Each month's individual inlet concentration values and corresponding individual gas flow rate values are multiplied and then summed to get the total organic volatile matter mass flow in the gas stream entering the solvent recovery device for the month. Each month's individual outlet concentration values and corresponding individual gas flow rate values are multiplied and then summed to get the total organic volatile matter mass flow in the gas stream exiting the solvent recovery device for the month.

(iv) If demonstrating compliance on the basis of organic HAP emission rate based on solids applied or emission of less than the calculated allowable organic HAP, determine the solids content of each ink, coating, varnish, adhesive, primer, solvent, and other material applied during the month following the procedure in §63.827(c)(2).

(v) Install, calibrate, operate and maintain the instrumentation necessary to measure continuously the site-specific operating parameter established in accordance with §63.828(a)(5) whenever a product and packaging rotogravure or wide-web flexographic printing press is operated.

(vi) Determine the capture efficiency (F) in accordance with §63.827(e)–(f).

(vii) Calculate the overall organic HAP control efficiency, (R), achieved for each month using Equation 13.

$$R = \frac{EF}{100} \quad Eq\ 13$$

(viii) If demonstrating compliance on the basis of organic HAP emission rate based on solids applied, organic HAP emission rate based on material applied or emission of less than the calculated allowable organic HAP, calculate the organic HAP emitted during the month, H, for each month using Equation 14.

$$H = \left[ 1 - \left( \frac{E}{100} \frac{F}{100} \right) \right] \left[ \sum_{i=1}^p \left( C_{ki} M_i + \sum_{j=1}^q C_{kj} M_{ij} \right) \right] \quad Eq\ 14$$

(ix) If demonstrating compliance on the basis of organic HAP emission rate based on solids applied, calculate the organic HAP emission rate based on solids applied, L, using Equation 15.

$$L = \frac{H}{\sum_{i=1}^p C_s M_i} \quad Eq\ 15$$

(x) If demonstrating compliance on the basis of organic HAP emission rate based on materials applied, calculate the organic HAP emission rate based on material applied, S, using Equation 16.



$$S = \frac{H}{\sum_{i=1}^p \left[ M_i + \sum_{j=1}^q M_{ij} \right]} \quad Eq\ 16$$

(xi) The affected source is in compliance if the capture system operating parameter is operated at an average value greater than or less than (as appropriate) the operating parameter value established in accordance with §63.828(a)(5) for each three hour period, and

(A) The organic volatile matter collection and recovery efficiency,  $R_v$ , is 95 percent or greater, or

(B) The organic HAP emission rate based on solids applied,  $L$ , is 0.20 kg organic HAP per kg solids applied or less, or

(C) The organic HAP emission rate based on material applied,  $S$ , is 0.04 kg organic HAP per kg material applied or less, or

(D) The organic HAP emitted during the month,  $H$ , is less than the calculated allowable organic HAP,  $H_a$ , as determined using paragraph (e) of this section.

(d) To demonstrate compliance with the overall organic HAP control efficiency requirement in §63.825(b)(7) or the overall organic HAP emission rate limitation requirements in §63.825(b)(8)–(10), each owner or operator using an oxidizer to control emissions shall show compliance by following the procedures in either paragraph (d)(1) or (d)(2) of this section:

(1) demonstrate initial compliance through performance tests of capture efficiency and control device efficiency and continuing compliance through continuous monitoring of capture system and control device operating parameters following the procedures in paragraph (d)(1)(i) through (d)(1)(xi) of this section:

(i) Determine the oxidizer destruction efficiency ( $E$ ) using the procedure in §63.827(d).

(ii) Determine the capture system capture efficiency ( $F$ ) in accordance with §63.827(e)–(f).

(iii) Calculate the overall organic HAP control efficiency, ( $R$ ), achieved using Equation 13.

(iv) If demonstrating compliance on the basis of organic HAP emission rate based on solids applied, organic HAP emission rate based on materials applied, or emission of less than the calculated allowable organic HAP, measure the mass of each ink, coating, varnish, adhesive, primer, solvent, and other material applied on the press or group of presses controlled by a common control device during the month.

(v) If demonstrating compliance on the basis of organic HAP emission rate based on solids applied, organic HAP emission rate based on material applied or emission of less than the calculated allowable organic HAP, determine the organic HAP content of each ink, coating, varnish, adhesive, primer, solvent, and other material applied during the month following the procedure in §63.827(b)(2).

(vi) If demonstrating compliance on the basis of organic HAP emission rate based on solids applied or emission of less than the calculated allowable organic HAP, determine the solids content of each ink, coating, varnish, adhesive, primer, solvent, and other material applied during the month following the procedure in §63.827(c)(2).

(vii) If demonstrating compliance on the basis of organic HAP emission rate based on solids applied, organic HAP emission rate based on material applied or emission of less than the calculated allowable organic HAP, calculate the organic HAP emitted during the month,  $H$ , for each month using Equation 14.

(viii) If demonstrating compliance on the basis of organic HAP emission rate based on solids applied, calculate the organic HAP emission rate based on solids applied,  $L$ , for each month using Equation 15.

(ix) If demonstrating compliance on the basis of organic HAP emission rate based on materials applied, calculate the organic HAP emission rate based on material applied,  $S$ , using Equation 16.

(x) Install, calibrate, operate and maintain the instrumentation necessary to measure continuously the site-specific operating parameters established in accordance with §63.828(a)(4)–(5) whenever a product and packaging rotogravure or wide-web flexographic press is operating.

(xi) The affected source is in compliance, if the oxidizer is operated such that the average operating parameter value is greater than the operating parameter value established in accordance with §63.828(a)(4) for each three-hour period, and the capture system operating parameter is operated at an average value greater than or less than (as appropriate) the operating parameter value established in accordance with §63.828(a)(5) for each three hour period, and

(A) The overall organic HAP control efficiency, R, is 95 percent or greater, or

(B) The organic HAP emission rate based on solids applied, L, is 0.20 kg organic HAP per kg solids applied or less, or

(C) The organic HAP emission rate based on material applied, S, is 0.04 kg organic HAP per kg material applied or less, or

(D) The organic HAP emitted during the month, H, is less than the calculated allowable organic HAP,  $H_a$ , as determined using paragraph (e) of this section.

(2) Use continuous emission monitors, conduct an initial performance test of capture efficiency, and continuously monitor a site specific operating parameter to assure capture efficiency. The percent control efficiency of the oxidizer shall be demonstrated in accordance with the requirements of paragraph (c)(2) of this section except that separate continuous volumetric gas flow measurements of the inlet and outlet volumetric gas flow rates are required for an oxidizer.

(e) Owners or operators may calculate the monthly allowable HAP emissions,  $H_a$ , for demonstrating compliance in accordance with paragraph (b)(6), (c)(1)(xi)(D), (c)(2)(xi)(D), or (d)(1)(xi)(D) of this section as follows:

(1) Determine the as-purchased mass of each ink, coating, varnish, adhesive, primer, and other solids-containing material applied each month,  $M_i$ .

(2) Determine the as-purchased solids content of each ink, coating, varnish, adhesive, primer, and other solids-containing material applied each month, in accordance with §63.827(c)(2),  $C_{si}$ .

(3) Determine the as-purchased mass fraction of each ink, coating, varnish, adhesive, primer, and other solids-containing material which was applied at 20 weight-percent or greater solids content, on an as-applied basis,  $G_i$ .

(4) Determine the total mass of each solvent, diluent, thinner, or reducer added to materials which were applied at less than 20 weight-percent solids content, on an as-applied basis, each month,  $M_{Lj}$ .

(5) Calculate the monthly allowable HAP emissions,  $H_a$ , using Equation 17.

$$H_a = 0.20 \left[ \sum_{i=1}^p M_i G_i C_{si} \right] + 0.04 \left[ \sum_{i=1}^p M_i (1 - G_i) + \sum_{j=1}^q M_{Lj} \right] \quad Eq\ 17$$

(f) Owners or operators of product and packaging rotogravure or wide-web flexographic printing presses shall demonstrate compliance according to the procedures in paragraphs (f)(1) through (f)(7) of this section if the affected source operates more than one capture system, more than one control device, one or more never-controlled work stations, or one or more intermittently-controllable work stations.

(1) The owner or operator of each solvent recovery system used to control one or more product and packaging rotogravure or wide-web flexographic presses for which the owner or operator chooses to comply by means of a liquid-liquid mass balance shall determine the organic HAP emissions for those presses controlled by that solvent recovery system either

(i) in accordance with paragraphs (c)(1)(i)–(iii) and (c)(1)(v)–(viii) of this section if the presses controlled by that solvent recovery system have only always-controlled work stations, or

(ii) in accordance with paragraphs (c)(1)(ii)–(iii), (c)(1)(v)–(vi), and (g) of this section if the presses controlled by that solvent recovery system have one or more never-controlled or intermittently-controllable work stations.

(2) The owner or operator of each solvent recovery system used to control one or more product and packaging rotogravure or wide-web flexographic presses, for which the owner or operator chooses to comply by means of an initial test of capture efficiency, continuous emission monitoring of the control device, and continuous monitoring of a capture system operating parameter, shall

(i) For each capture system delivering emissions to that solvent recovery system, monitor an operating parameter established in accordance with §63.828(a)(5) to assure capture system efficiency, and

(ii) Determine the organic HAP emissions for those presses served by each capture system delivering emissions to that solvent recovery system either

(A) In accordance with paragraphs (c)(2)(i)–(iii) and (c)(2)(v)–(viii) of this section if the presses served by that capture system have only always-controlled work stations, or

(B) In accordance with paragraphs (c)(2)(ii)–(iii), (c)(2)(v)–(vii), and (g) of this section if the presses served by that capture system have one or more never-controlled or intermittently-controllable work stations.

(3) The owner or operator of each oxidizer used to control emissions from one or more product and packaging rotogravure or wide-web flexographic presses choosing to demonstrate compliance through performance tests of capture efficiency and control device efficiency and continuing compliance through continuous monitoring of capture system and control device operating parameters, shall

(i) Monitor an operating parameter established in accordance with §63.828(a)(4) to assure control device efficiency, and

(ii) For each capture system delivering emissions to that oxidizer, monitor an operating parameter established in accordance with §63.828(a)(5) to assure capture efficiency, and

(iii) Determine the organic HAP emissions for those presses served by each capture system delivering emissions to that oxidizer either

(A) In accordance with paragraphs (d)(1)(i)–(v) and (d)(1)(vii) of this section if the presses served by that capture system have only always-controlled work stations, or

(B) In accordance with paragraphs (d)(1)(i)–(iii), (d)(1)(v), and (g) of this section if the presses served by that capture system have one or more never-controlled or intermittently-controllable work stations.

(4) The owner or operator of each oxidizer used to control emissions from one or more product and packaging rotogravure or wide-web flexographic presses choosing to demonstrate compliance through an initial capture efficiency test, continuous emission monitoring of the control device and continuous monitoring of a capture system operating parameter, shall

(i) For each capture system delivering emissions to that oxidizer, monitor an operating parameter established in accordance with §63.828(a)(5) to assure capture efficiency, and

(ii) Determine the organic HAP emissions for those presses served by each capture system delivering emissions to that oxidizer either

(A) In accordance with paragraphs (c)(2)(i)–(iii) and (c)(2)(v)–(viii) of this section if the presses served by that capture system have only always-controlled work stations, or

(B) In accordance with paragraphs (c)(2)(ii)–(iii), (c)(2)(v)–(vii), and (g) of this section if the presses served by that capture system have one or more never-controlled or intermittently-controllable work stations.

(5) The owner or operator of one or more uncontrolled product and packaging rotogravure or wide-web flexographic printing presses shall determine the organic HAP applied on those presses using Equation 8. The organic HAP emitted from an uncontrolled press is equal to the organic HAP applied on that press.

(6) If demonstrating compliance on the basis of organic HAP emission rate based on solids applied or emission of less than the calculated allowable organic HAP, the owner or operator shall determine the solids content of each ink, coating, varnish, adhesive, primer, solvent and other material applied during the month following the procedure in §63.827(c)(2).

(7) The owner or operator shall determine the organic HAP emissions for the affected source for the month by summing all organic HAP emissions calculated according to paragraphs (f)(1), (f)(2)(ii), (f)(3)(iii), (f)(4)(ii), and (f)(5) of this section. The affected source is in compliance for the month, if all operating parameters required to be monitored under paragraphs (f)(2)–(4) of this section were maintained at the appropriate values, and

(i) The total mass of organic HAP emitted by the affected source was not more than four percent of the total mass of inks, coatings, varnishes, adhesives, primers, solvents, diluents, reducers, thinners and other materials applied by the affected source, or

(ii) The total mass of organic HAP emitted by the affected source was not more than 20 percent of the total mass of solids applied by the affected source, or

(iii) The total mass of organic HAP emitted by the affected source was not more than the equivalent allowable organic HAP emissions for the affected source,  $H_a$ , calculated in accordance with paragraph (e) of this section, or

(iv) The total mass of organic HAP emitted by the affected source was not more than five percent of the total mass of organic HAP applied by the affected source. The total mass of organic HAP applied by the affected source in the month shall be determined by the owner or operator using Equation 8.

(g) Owners or operators determining organic HAP emissions from a press or group of presses having one or more never-controlled or intermittently-controllable work stations and using the procedures specified in paragraphs (f)(1)(ii), (f)(2)(ii)(B), (f)(3)(iii)(B), or (f)(4)(ii)(B) of this section shall for that press or group of presses:

(1) Determine the sum of the mass of all inks, coatings, varnishes, adhesives, primers, and other solids-containing materials which are applied on intermittently-controllable work stations in bypass mode and the mass of all inks, coatings, varnishes, adhesives, primers, and other solids-containing materials which are applied on never-controlled work stations during the month,  $M_{Bi}$ .

(2) Determine the sum of the mass of all solvents, reducers, thinners, and other diluents which are applied on intermittently-controllable work stations in bypass mode and the mass of all solvents, reducers, thinners, and other diluents which are applied on never-controlled work stations during the month,  $M_{Bj}$ .

(3) Determine the sum of the mass of all inks, coatings, varnishes, adhesives, primers, and other solids-containing materials which are applied on intermittently-controllable work stations in controlled mode and the mass of all inks, coatings, varnishes, adhesives, primers, and other solids-containing materials which are applied on always-controlled work stations during the month,  $M_{Bi}$ .

(4) Determine the sum of the mass of all solvents, reducers, thinners, and other diluents which are applied on intermittently-controllable work stations in controlled mode and the mass of all solvents, reducers, thinners, and other diluents which are applied on always-controlled work stations during the month,  $M_{Cj}$ .

(5) For each press or group of presses for which the owner or operator uses the provisions of paragraph (f)(1)(ii) of this section, the owner or operator shall calculate the organic HAP emitted during the month using Equation 18.

$$H = \left[ \sum_{i=1}^p M_{\alpha} C_{ki} + \sum_{j=1}^q M_{\alpha} C_{kj} \right] \left[ 1 - \frac{M_w}{\sum_{i=1}^p M_{\alpha} C_{ki} + \sum_{j=1}^q M_{\alpha} C_{kj}} \right] + \left[ \sum_{i=1}^p M_{\beta} C_{ki} + \sum_{j=1}^q M_{\beta} C_{kj} \right] \quad Eq 18$$

(6) For each press or group of presses for which the owner or operator uses the provisions of paragraphs (f)(2)(ii)(B), (f)(3)(iii)(B), or (f)(4)(ii)(B) of this section, the owner or operator shall calculate the organic HAP emitted during the month using Equation (19).

$$H = \left[ \sum_{i=1}^p M_{\alpha} C_{ki} + \sum_{j=1}^q M_{\alpha} C_{kj} \right] \left[ 1 - \left( \frac{E}{100} \frac{F}{100} \right) \right] + \left[ \sum_{i=1}^p M_{\beta} C_{ki} + \sum_{j=1}^q M_{\beta} C_{kj} \right] \quad Eq 19$$

(h) If the affected source operates more than one capture system or more than one control device, and has no never-controlled work stations and no intermittently-controllable work stations, then the affected source is in compliance with the 95 percent overall organic HAP control efficiency requirement for the month if for each press or group of presses controlled by a common control device:

(1) The volatile matter collection and recovery efficiency,  $R_v$ , as determined by paragraphs (c)(1)(i), (c)(1)(iii), and (c)(1)(v)–(vii) of this section is equal to or greater than 95 percent, or

(2) The overall organic HAP control efficiency as determined by paragraphs (c)(2)(iii) and (c)(2)(v)–(vii) of this section for each press or group of presses served by that control device and a common capture system is equal to or greater than 95 percent and the average capture system operating parameter value for each capture system serving that control device is greater than or less than (as appropriate) the operating parameter value established for that capture system in accordance with §63.828(a)(5) for each three hour period, or

(3) The overall organic HAP control efficiency as determined by paragraphs (d)(1)(i)–(iii) and (d)(1)(x) of this section for each press or group of presses served by that control device and a common capture system is equal to or greater than 95 percent, the oxidizer is operated such that the average operating parameter value is greater than the operating parameter value established in accordance with §63.828(a)(4) for each three hour period, and the average capture system operating parameter value for each capture system serving that control device is greater than or less than (as appropriate) the operating parameter value established for that capture system in accordance with §63.828(a)(5) for each three hour period.

[61 FR 27140, May 30, 1996, as amended at 71 FR 29801, May 24, 2006]

#### **§ 63.826 Compliance dates.**

(a) The compliance date for an owner or operator of an existing affected source subject to the provisions of this subpart is May 30, 1999.

(b) The compliance date for an owner or operator of a new affected source subject to the provisions of this subpart is immediately upon start-up of the affected source, or May 30, 1996, whichever is later.

(c) Affected sources which have undergone reconstruction are subject to the requirements for new affected sources. The costs associated with the purchase and installation of air pollution control equipment are not considered in determining whether the affected source has been reconstructed. Additionally, the costs of retrofitting and replacement of equipment that is installed specifically to comply with this subpart are not considered reconstruction costs.

#### **§ 63.827 Performance test methods.**

(a) An owner or operator using a control device to comply with the requirements of §§63.824–63.825 is not required to conduct an initial performance test to demonstrate compliance if one or more of the criteria in paragraphs (a)(1) through (a)(3) of this section are met:

(1) A control device that is in operation prior to May 30, 1996, does not need to be tested if

(i) It is equipped with continuous emission monitors for determining total organic volatile matter concentration and the volumetric gas flow rate, and capture efficiency has been determined in accordance with the requirements of this subpart, such that an overall organic HAP control efficiency can be calculated, and

(ii) The continuous emission monitors are used to demonstrate continuous compliance in accordance with §63.824(b)(1)(ii), §63.825(b)(2)(ii), §63.825(c)(2), or §63.825(d)(2), as applicable, and §63.828, or

(2) The owner or operator has met the requirements of either §63.7(e)(2)(iv) or §63.7(h), or

(3) The control device is a solvent recovery system and the owner or operator chooses to comply by means of a monthly liquid-liquid material balance.

(b) Determination of the weight fraction organic HAP of inks, coatings, varnishes, adhesives, primers, solvents, thinners, reducers, diluents, and other materials used by a publication rotogravure affected source shall be conducted according to paragraph (b)(1) of this section. Determination of the weight fraction organic HAP of inks, coatings, varnishes, adhesives, primers, solvents, thinners, reducers, diluents, and other materials applied by a product and packaging rotogravure or

wide-web flexographic printing affected source shall be conducted according to paragraph (b)(2) of this section. If the weight fraction organic HAP values are not determined using the procedures in paragraphs (b)(1) or (b)(2) of this section, the owner or operator must submit an alternative test method for determining their values for approval by the Administrator in accordance with §63.7(f). The recovery efficiency of the test method must be determined for all of the target organic HAP and a correction factor, if necessary, must be determined and applied.

(1) Each owner or operator of a publication rotogravure affected source shall determine the weight fraction organic HAP of each ink, coating, varnish, adhesive, primer, solvent, and other material used by following one of the procedures in paragraphs (b)(1)(i) through (iii) of this section:

(i) The owner or operator may test the material in accordance with Method 311 of appendix A of this part. The Method 311 determination may be performed by the owner or operator of the affected source, the supplier of the material, or an independent third party. The organic HAP content determined by Method 311 must be calculated according to the criteria and procedures in paragraphs (b)(1)(i)(A) through (C) of this section.

(A) Include each organic HAP determined to be present at greater than or equal to 0.1 weight percent for Occupational Safety and Health Administration (OSHA)-defined carcinogens as specified in 29 CFR 1910.1200(d)(4) and greater than or equal to 1.0 weight percent for other organic HAP compounds.

(B) Express the weight fraction of each organic HAP included according to paragraph (b)(1)(i)(A) of this section as a value truncated to four places after the decimal point (for example, 0.3791).

(C) Calculate the total weight fraction of organic HAP in the tested material by summing the weight fraction of each organic HAP included according to paragraph (b)(1)(i)(A) of this section and truncating the result to three places after the decimal point (for example, 0.763).

(ii) The owner or operator may determine the weight fraction volatile matter of the material in accordance with §63.827(c)(1) and use this value for the weight fraction organic HAP for all compliance purposes.

(iii) The owner or operator may use formulation data to determine the weight fraction organic HAP of a material. Formulation data may be provided to the owner or operator on a CPDS by the supplier of the material or an independent third party. Formulation data may be used provided that the weight fraction organic HAP is calculated according to the criteria and procedures in paragraphs (b)(1)(iii)(A) through (D) of this section. In the event of an inconsistency between the formulation data and the result of Method 311 of appendix A of this part, where the test result is higher, the Method 311 data will take precedence unless, after consultation, the owner or operator can demonstrate to the satisfaction of the enforcement agency that the formulation data are correct.

(A) For each raw material used in making the material, include each organic HAP present in that raw material at greater than or equal to 0.1 weight percent for OSHA-defined carcinogens as specified in 29 CFR 1910.1200(d)(4) and greater than or equal to 1.0 weight percent for other organic HAP compounds. The weight fraction of each such organic HAP in each raw material must be determined by Method 311 of appendix A of this part, by an alternate method approved by the Administrator, or from a CPDS provided by the raw material supplier or an independent third party. The weight fraction of each such organic HAP in each raw material must be expressed as a value truncated to four places after the decimal point (for example, 0.1291).

(B) For each raw material used in making the material, the weight fraction contribution of each organic HAP, which is included according to paragraph (b)(1)(iii)(A) of this section, in that raw material to the weight fraction organic HAP of the material is calculated by multiplying the weight fraction, truncated to four places after the decimal point (for example, 0.1291), of that organic HAP in that raw material times the weight fraction of that raw material, truncated to four places after the decimal point (for example, 0.2246), in the material. The product of each such multiplication is to be truncated to four places after the decimal point (for example, 0.1291 times 0.2246 yields 0.02899586 which truncates to 0.0289).

(C) For each organic HAP which is included according to paragraph (b)(1)(iii)(A) of this section, the total weight fraction of that organic HAP in the material is calculated by adding the weight fraction contribution of that organic HAP from each raw material in which that organic HAP is included according to paragraph (b)(1)(iii)(A) of this section. The sum of each such addition must be expressed to four places after the decimal point.

(D) The total weight fraction of organic HAP in the material is the sum of the counted individual organic HAP weight fractions. This sum must be truncated to three places after the decimal point (for example, 0.763).

(2) Each owner or operator of a product and packaging rotogravure or wide-web flexographic printing affected source shall determine the organic HAP weight fraction of each ink, coating, varnish, adhesive, primer, solvent, and other material applied by following one of the procedures in paragraphs (b)(2)(i) through (iii) of this section:

(i) The owner or operator may test the material in accordance with Method 311 of appendix A of this part. The Method 311 determination may be performed by the owner or operator of the affected source, the supplier of the material, or an independent third party. The organic HAP content determined by Method 311 must be calculated according to the criteria and procedures in paragraphs (b)(2)(i)(A) through (C) of this section.

(A) Include each organic HAP determined to be present at greater than or equal to 0.1 weight percent for OSHA-defined carcinogens as specified in 29 CFR 1910.1200(d)(4) and greater than or equal to 1.0 weight percent for other organic HAP compounds.

(B) Express the weight fraction of each organic HAP included according to paragraph (b)(2)(i)(A) of this section as a value truncated to four places after the decimal point (for example, 0.3791).

(C) Calculate the total weight fraction of organic HAP in the tested material by summing the weight fraction of each organic HAP included according to paragraph (b)(2)(i)(A) of this section and truncating the result to three places after the decimal point (for example, 0.763).

(ii) The owner or operator may determine the weight fraction volatile matter of the material in accordance with §63.827(c)(2) and use this value for the weight fraction organic HAP for all compliance purposes.

(iii) The owner or operator may use formulation data to determine the weight fraction organic HAP of a material. Formulation data may be provided to the owner or operator on a CPDS by the supplier of the material or an independent third party. Formulation data may be used provided that the weight fraction organic HAP is calculated according to the criteria and procedures in paragraphs (b)(2)(iii)(A) through (D) of this section. In the event of an inconsistency between the formulation data and the result of Method 311 of appendix A of this part, where the test result is higher, the Method 311 data will take precedence unless, after consultation, the owner or operator can demonstrate to the satisfaction of the enforcement agency that the formulation data are correct.

(A) For each raw material used in making the material, include each organic HAP present in that raw material at greater than or equal to 0.1 weight percent for OSHA-defined carcinogens as specified in 29 CFR 1910.1200(d)(4) and greater than or equal to 1.0 weight percent for other organic HAP compounds. The weight fraction of each such organic HAP in each raw material must be determined by Method 311 of appendix A of this part, by an alternate method approved by the Administrator, or from a CPDS provided by the raw material supplier or an independent third party. The weight fraction of each such organic HAP in each raw material must be expressed as a value truncated to four places after the decimal point (for example, 0.1291).

(B) For each raw material used in making the material, the weight fraction contribution of each organic HAP, which is included according to paragraph (b)(2)(iii)(A) of this section, in that raw material to the weight fraction organic HAP of the material is calculated by multiplying the weight fraction, truncated to four places after the decimal point (for example, 0.1291), of that organic HAP in that raw material times the weight fraction of that raw material, truncated to four places after the decimal point (for example, 0.2246), in the material. The product of each such multiplication is truncated to four places after the decimal point (for example, 0.1291 times 0.2246 yields 0.02899586 which truncates to 0.0289).

(C) For each organic HAP which is included according to paragraph (b)(2)(iii)(A) of this section, the total weight fraction of that organic HAP in the material is calculated by adding the weight fraction contribution of that organic HAP from each raw material in which that organic HAP is included according to paragraph (b)(2)(iii)(A) of this section. The sum of each such addition must be expressed to four places after the decimal point.

(D) The total weight fraction of organic HAP in the material is the sum of the counted individual organic HAP weight fractions. This sum is to be truncated to three places after the decimal point (for example, 0.763).

(c) Determination of the weight fraction volatile matter content of inks, coatings, varnishes, adhesives, primers, solvents, reducers, thinners, diluents, and other materials used by a publication rotogravure affected source shall be conducted according to paragraph (c)(1) of this section. Determination of the weight fraction volatile matter content and weight fraction solids content of inks, coatings, varnishes, adhesives, primers, solvents, reducers, thinners, diluents, and other materials applied by a product and packaging rotogravure or wide-web flexographic printing affected source shall be conducted according to paragraph (c)(2) of this section.

(1) Each owner or operator of a publication rotogravure affected source shall determine the volatile matter weight fraction of each ink, coating, varnish, adhesive, primer, solvent, reducer, thinner, diluent, and other material used by following the procedures in paragraph (b)(1)(i) of this section, or by using formulation data as described in paragraph (c)(3) of this section.

(i) Determine the volatile matter weight fraction of the material using Method 24A of 40 CFR part 60, appendix A. The Method 24A determination may be performed by the owner or operator of the affected source, the supplier of the material,

or an independent third party. The Method 24A result shall be truncated to three places after the decimal point (for example, 0.763). If these values cannot be determined using Method 24A, the owner or operator shall submit an alternative technique for determining their values for approval by the Administrator.

(2) Each owner or operator of a product and packaging rotogravure or wide-web flexographic printing affected source shall determine the volatile matter weight fraction and solids weight fraction of each ink, coating, varnish, adhesive, primer, solvent, reducer, thinner, diluent, and other material applied by following the procedures in paragraphs (b)(2)(i) and (ii) of this section, or by using formulation data as described in paragraph (c)(3) of this section.

(i) Determine the volatile matter weight fraction of the material using Method 24 of 40 CFR part 60, appendix A. The Method 24 determination may be performed by the owner or operator of the affected source, the supplier of the material, or an independent third party. The Method 24 result shall be truncated to three places after the decimal point (for example, 0.763). If these values cannot be determined using Method 24, the owner or operator shall submit an alternative technique for determining their values for approval by the Administrator.

(ii) Calculate the solids weight fraction Method 24 result by subtracting the volatile matter weight fraction Method 24 result from 1.000. This calculation may be performed by the owner or operator, the supplier of the material, or an independent third party.

(3) The owner or operator may use formulation data to determine the volatile matter weight fraction or solids weight fraction of a material. Formulation data may be provided to the owner or operator on a CPDS by the supplier of the material or an independent third party. The volatile matter weight fraction and solids weight fraction shall be truncated to three places after the decimal point (for example, 0.763). In the event of any inconsistency between the formulation data and the result of Method 24 or Method 24A of 40 CFR part 60, appendix A, where the test result for volatile matter weight fraction is higher or the test result for solids weight fraction is lower, the applicable test method data will take precedence unless, after consultation, the owner or operator can demonstrate to the satisfaction of the enforcement agency that the formulation data are correct.

(d) A performance test of a control device to determine destruction efficiency for the purpose of meeting the requirements of §§63.824–63.825 shall be conducted by the owner or operator in accordance with the following:

(1) An initial performance test to establish the destruction efficiency of an oxidizer and the associated combustion zone temperature for a thermal oxidizer and the associated catalyst bed inlet temperature for a catalytic oxidizer shall be conducted and the data reduced in accordance with the following reference methods and procedures:

(i) Method 1 or 1A of 40 CFR part 60, appendix A is used for sample and velocity traverses to determine sampling locations.

(ii) Method 2, 2A, 2C, or 2D of 40 CFR part 60, appendix A is used to determine gas volumetric flow rate.

(iii) Method 3 of 40 CFR part 60, appendix A is used for gas analysis to determine dry molecular weight.

(iv) Method 4 of 40 CFR part 60, appendix A is used to determine stack gas moisture.

(v) Methods 2, 2A, 3, and 4 of 40 CFR part 60, appendix A shall be performed, as applicable, at least twice during each test period.

(vi) Method 25 of 40 CFR part 60, appendix A, shall be used to determine organic volatile matter concentration, except as provided in paragraphs (d)(1)(vi)(A) through (D) of this section. The owner or operator shall submit notice of the intended test method to the Administrator for approval along with notice of the performance test required under §63.7(c). The same method must be used for both the inlet and outlet measurements. The owner or operator may use Method 25A of 40 CFR part 60, appendix A, if (A) An exhaust gas organic volatile matter concentration of 50 parts per million by volume (ppmv) or less as carbon is required to comply with the standards of §§63.824–63.825, or

(B) The organic volatile matter concentration at the inlet to the control system and the required level of control are such to result in exhaust gas organic volatile matter concentrations of 50 ppmv or less as carbon, or

(C) Because of the high efficiency of the control device, the anticipated organic volatile matter concentration at the control device exhaust is 50 ppmv or less as carbon, regardless of inlet concentration, or

(D) The control device is not an oxidizer.



(vii) Each performance test shall consist of three separate runs; each run conducted for at least one hour under the conditions that exist when the affected source is operating under normal operating conditions. For the purpose of determining organic volatile matter concentrations and mass flow rates, the average of results of all runs shall apply.

(viii) Organic volatile matter mass flow rates shall be determined using Equation 20:

$$M_f = Q_{sd} C_c [12.0] [0.0416] [10^{-6}] \quad \text{Eq. 20}$$

Where:

$M_f$  = Total organic volatile matter mass flow rate, kg/hour (h).

$Q_{sd}$  = Volumetric flow rate of gases entering or exiting the control device, as determined according to §63.827(d)(1)(ii), dry standard cubic meters (dscm)/h.

$C_c$  = Concentration of organic compounds as carbon, ppmv.

12.0 = Molecular weight of carbon.

0.0416 = Conversion factor for molar volume, kg-moles per cubic meter (mol/m<sup>3</sup>) (@ 293 Kelvin (K) and 760 millimeters of mercury (mmHg)).

(ix) Emission control device efficiency shall be determined using Equation 21:

$$E = \frac{M_{f,i} - M_{f,o}}{M_{f,i}} \quad \text{Eq 21}$$

(2) The owner or operator shall record such process information as may be necessary to determine the conditions of the performance test. Operations during periods of start-up, shutdown, and malfunction shall not constitute representative conditions for the purpose of a performance test.

(3) For the purpose of determining the value of the oxidizer operating parameter that will demonstrate continuing compliance, the time-weighted average of the values recorded during the performance test shall be computed. For an oxidizer other than catalytic oxidizer, the owner or operator shall establish as the operating parameter the minimum combustion temperature. For a catalytic oxidizer, the owner or operator shall establish as the operating parameter the minimum gas temperature upstream of the catalyst bed. These minimum temperatures are the operating parameter values that demonstrate continuing compliance with the requirements of §§63.824–63.825.

(e) A performance test to determine the capture efficiency of each capture system venting organic emissions to a control device for the purpose of meeting the requirements of §§63.824(b)(1)(ii), 63.824(b)(2), 63.825(c)(2), 63.825(d)(1)–(2), 63.825(f)(2)–(4), or 63.825(h)(2)–(3) shall be conducted by the owner or operator in accordance with the following:

(1) You may assume your capture efficiency equals 100 percent if your capture system is a permanent total enclosure (PTE). You must confirm that your capture system is a PTE by demonstrating that it meets the requirements of section 6 of Method 204 of 40 CFR part 51, appendix M, and that all exhaust gases from the enclosure are delivered to a control device.

(2) You may determine capture efficiency according to the protocols for testing with temporary total enclosures that are specified in Methods 204 and 204A through F of 40 CFR part 51, appendix M. You may exclude never controlled work stations from such capture efficiency determinations.

(f) As an alternative to the procedures specified in §63.827(e) an owner or operator required to conduct a capture efficiency test may use any capture efficiency protocol and test methods that satisfy the criteria of either the Data Quality Objective (DQO) or the Lower Confidence Limit (LCL) approach as described in Appendix A of this subpart. The owner or operator may exclude never-controlled work stations from such capture efficiency determinations.

[61 FR 27140, May 30, 1996, as amended at 71 FR 29802, May 24, 2006]

## § 63.828 Monitoring requirements.

(a) Following the date on which the initial performance test of a control device is completed, to demonstrate continuing compliance with the standard, the owner or operator shall monitor and inspect each control device required to comply with §§63.824–63.825 to ensure proper operation and maintenance by implementing the applicable requirements in paragraph (a)(1) through (a)(5) of this section.

(1) Owners or operators of product and packaging rotogravure or wide-web flexographic presses with intermittently-controllable work stations shall follow one of the procedures in paragraphs (a)(1)(i) through (a)(1)(iv) of this section for each dryer associated with such a work station:

(i) Install, calibrate, maintain, and operate according to the manufacturer's specifications a flow control position indicator that provides a record indicating whether the exhaust stream from the dryer was directed to the control device or was diverted from the control device. The time and flow control position must be recorded at least once per hour, as well as every time the flow direction is changed. The flow control position indicator shall be installed at the entrance to any bypass line that could divert the exhaust stream away from the control device to the atmosphere.

(ii) Secure any bypass line valve in the closed position with a car-seal or a lock-and-key type configuration; a visual inspection of the seal or closure mechanism shall be performed at least once every month to ensure that the valve or damper is maintained in the closed position and the exhaust stream is not diverted through the bypass line.

(iii) Ensure that any bypass line valve or damper is in the closed position through continuous monitoring of valve position. The monitoring system shall be inspected at least once every month to ensure that it is functioning properly.

(iv) Use an automatic shutdown system in which the press is stopped when flow is diverted away from the control device to any bypass line. The automatic system shall be inspected at least once every month to ensure that it is functioning properly.

(2) Compliance monitoring shall be subject to the provisions of paragraphs (a)(2)(i) and (a)(2)(ii) of this section, as applicable.

(i) All continuous emission monitors shall comply with performance specifications (PS) 8 or 9 of 40 CFR part 60, appendix B, as appropriate. The requirements of appendix F of 40 CFR part 60 shall also be followed. In conducting the quarterly audits required by appendix F, owners or operators must challenge the monitors with compounds representative of the gaseous emission stream being controlled.

(ii) All temperature monitoring equipment shall be installed, calibrated, maintained, and operated according to manufacturers specifications. The calibration of the chart recorder, data logger, or temperature indicator shall be verified every three months; or the chart recorder, data logger, or temperature indicator shall be replaced. The replacement shall be done either if the owner or operator chooses not to perform the calibration, or if the equipment cannot be calibrated properly.

(3) An owner or operator complying with §§63.824–63.825 through continuous emission monitoring of a control device shall install, calibrate, operate, and maintain continuous emission monitors to measure total organic volatile matter concentration and volumetric gas flow rate in accordance with §63.824(b)(1)(ii), §63.825(b)(2)(ii), §63.825(c)(2), or §63.825(d)(2), as applicable.

(4) An owner or operator complying with the requirements of §§63.824–63.825 through the use of an oxidizer and demonstrating continuous compliance through monitoring of an oxidizer operating parameter shall:

(i) For an oxidizer other than a catalytic oxidizer, install, calibrate, operate, and maintain a temperature monitoring device equipped with a continuous recorder. The device shall have an accuracy of  $\pm 1$  percent of the temperature being monitored in  $^{\circ}\text{C}$  or  $\pm 1$   $^{\circ}\text{C}$ , whichever is greater. The thermocouple or temperature sensor shall be installed in the combustion chamber at a location in the combustion zone.

(ii) For a catalytic oxidizer, install, calibrate, operate, and maintain a temperature monitoring device equipped with a continuous recorder. The device shall be capable of monitoring temperature with an accuracy of  $\pm 1$  percent of the temperature being monitored in  $^{\circ}\text{C}$  or  $\pm 1$   $^{\circ}\text{C}$ , whichever is greater. The thermocouple or temperature sensor shall be installed in the vent stream at the nearest feasible point to the catalyst bed inlet.

(5) An owner or operator complying with the requirements of §§63.824–63.825 through the use of a control device and demonstrating continuous compliance by monitoring an operating parameter to ensure that the capture efficiency measured during the initial compliance test is maintained, shall:

(i) Submit to the Administrator with the compliance status report required by §63.9(h) of the General Provisions, a plan that

(A) Identifies the operating parameter to be monitored to ensure that the capture efficiency measured during the initial compliance test is maintained,

(B) Discusses why this parameter is appropriate for demonstrating ongoing compliance, and

(C) Identifies the specific monitoring procedures;

(ii) Set the operating parameter value, or range of values, that demonstrate compliance with §§63.824–63.825, and

(iii) Conduct monitoring in accordance with the plan submitted to the Administrator unless comments received from the Administrator require an alternate monitoring scheme.

(b) Any excursion from the required operating parameters which are monitored in accordance with paragraphs (a)(4) and (a)(5) of this section, unless otherwise excused, shall be considered a violation of the emission standard.

[61 FR 27140, May 30, 1996, as amended at 71 FR 29804, May 24, 2006]

#### **§ 63.829 Recordkeeping requirements.**

(a) The recordkeeping provisions of 40 CFR part 63 subpart A of this part that apply and those that do not apply to owners and operators of affected sources subject to this subpart are listed in Table 1 of this subpart.

(b) Each owner or operator of an affected source subject to this subpart shall maintain the records specified in paragraphs (b)(1) through (b)(3) of this section on a monthly basis in accordance with the requirements of §63.10(b)(1) of this part:

(1) Records specified in §63.10(b)(2) of this part, of all measurements needed to demonstrate compliance with this standard, such as continuous emission monitor data, control device and capture system operating parameter data, material usage, HAP usage, volatile matter usage, and solids usage that support data that the source is required to report.

(2) Records specified in §63.10(b)(3) of this part for each applicability determination performed by the owner or operator in accordance with the requirements of §63.820(a) of this subpart, and

(3) Records specified in §63.10(c) of this part for each continuous monitoring system operated by the owner or operator in accordance with the requirements of §63.828(a) of this subpart.

(c) Each owner or operator of an affected source subject to this subpart shall maintain records of all liquid-liquid material balances performed in accordance with the requirements of §§63.824–63.825 of this subpart. The records shall be maintained in accordance with the requirements of §63.10(b) of this part.

(d) The owner or operator of each facility which commits to the criteria of §63.820(a)(2) shall maintain records of all required measurements and calculations needed to demonstrate compliance with these criteria, including the mass of all HAP containing materials used and the mass fraction of HAP present in each HAP containing material used, on a monthly basis.

(e) The owner or operator of each facility which meets the limits and criteria of §63.821(b)(1) shall maintain records as required in paragraph (e)(1) of this section. The owner or operator of each facility which meets the limits and criteria of §63.821(b)(2) shall maintain records as required in paragraph (e)(2) of this section. Owners or operators shall maintain these records for five years, and upon request, submit them to the Administrator.

(1) For each facility which meets the criteria of §63.821(b)(1), the owner or operator shall maintain records of the total mass of each material applied on product and packaging rotogravure or wide-web flexographic printing presses during each month.

(2) For each facility which meets the criteria of §63.821(b)(2), the owner or operator shall maintain records of the total mass and organic HAP content of each material applied on product and packaging rotogravure or wide-web flexographic printing presses during each month.

(f) The owner or operator choosing to exclude from an affected source, a product and packaging rotogravure or wide-web flexographic press which meets the limits and criteria of §63.821(a)(2)(ii)(A) shall maintain the records specified in paragraphs (f)(1) and (f)(2) of this section for five years and submit them to the Administrator upon request:

(1) The total mass of each material applied each month on the press, including all inboard and outboard stations, and

(2) The total mass of each material applied each month on the press by product and packaging rotogravure or wide-web flexographic printing operations.

[61 FR 27140, May 30, 1996, as amended at 71 FR 29804, May 24, 2006]

### **§ 63.830 Reporting requirements.**

(a) The reporting provisions of 40 CFR part 63 subpart A of this part that apply and those that do not apply to owners and operators of affected sources subject to this subpart are listed in Table 1 of this subpart.

(b) Each owner or operator of an affected source subject to this subpart shall submit the reports specified in paragraphs (b)(1) through (b)(6) of this section to the Administrator:

(1) An initial notification required in §63.9(b).

(i) Initial notifications for existing sources shall be submitted no later than one year before the compliance date specified in §63.826(a).

(ii) Initial notifications for new and reconstructed sources shall be submitted as required by §63.9(b).

(iii) For the purpose of this subpart, a Title V or part 70 permit application may be used in lieu of the initial notification required under §63.9(b), provided the same information is contained in the permit application as required by §63.9(b), and the State to which the permit application has been submitted has an approved operating permit program under part 70 of this chapter and has received delegation of authority from the EPA.

(iv) Permit applications shall be submitted by the same due dates as those specified for the initial notifications.

(2) A Notification of Performance Tests specified in §63.7 and §63.9(e) of this part. This notification, and the site-specific test plan required under §63.7(c)(2) shall identify the operating parameter to be monitored to ensure that the capture efficiency measured during the performance test is maintained. The operating parameter identified in the site-specific test plan shall be considered to be approved unless explicitly disapproved, or unless comments received from the Administrator require monitoring of an alternate parameter.

(3) A Notification of Compliance Status specified in §63.9(h) of this part.

(4) Performance test reports specified in §63.10(d)(2) of this part.

(5) Start-up, shutdown, and malfunction reports specified in §63.10(d)(5) of this part, except that the provisions in subpart A pertaining to start-ups, shutdowns, and malfunctions do not apply unless a control device is used to comply with this subpart.

(i) If actions taken by an owner or operator during a start-up, shutdown, or malfunction of an affected source (including actions taken to correct a malfunction) are not completely consistent with the procedures specified in the source's start-up, shutdown, and malfunction plan specified in §63.6(e)(3) of this part, the owner or operator shall state such information in the report. The start-up, shutdown, or malfunction report shall consist of a letter containing the name, title, and signature of the responsible official who is certifying its accuracy, that shall be submitted to the Administrator.

(ii) Separate start-up, shutdown, or malfunction reports are not required if the information is included in the report specified in paragraph (b)(6) of this section.

(6) A summary report specified in §63.10(e)(3) of this part shall be submitted on a semi-annual basis (i.e., once every 6-month period). These summary reports are required even if the affected source does not have any control devices or does not take the performance of any control devices into account in demonstrating compliance with the emission limitations in §63.824 or §63.825. In addition to a report of operating parameter exceedances as required by §63.10(e)(3)(i), the summary report shall include, as applicable:

- (i) Exceedances of the standards in §§63.824–63.825.
- (ii) Exceedances of either of the criteria of §63.820(a)(2).
- (iii) Exceedances of the criterion of §63.821(b)(1) and the criterion of §63.821(b)(2) in the same month.
- (iv) Exceedances of the criterion of §63.821(a)(2)(ii)(A).

[61 FR 27140, May 30, 1996, as amended at 71 FR 29804, May 24, 2006]

### **§ 63.831 Implementation and enforcement.**

(a) This subpart can be implemented and enforced by the U.S. EPA, or a delegated authority such as the applicable State, local, or Tribal agency. If the U.S. EPA Administrator has delegated authority to a State, local, or Tribal agency, then that agency, in addition to the U.S. EPA, has the authority to implement and enforce this subpart. Contact the applicable U.S. EPA Regional Office to find out if this subpart is delegated to a State, local, or Tribal agency.

(b) In delegating implementation and enforcement authority of this subpart to a State, local, or Tribal agency under subpart E of this part, the authorities contained in paragraph (c) of this section are retained by the Administrator of U.S. EPA and cannot be transferred to the State, local, or Tribal agency.

(c) The authorities that cannot be delegated to State, local, or Tribal agencies are as specified in paragraphs (c)(1) through (4) of this section.

(1) Approval of alternatives to the requirements in §§63.820 through 63.821 and 63.823 through 63.826.

(2) Approval of alternatives to the test method for organic HAP content determination in §63.827(b) and alternatives to the test method for volatile matter in §63.827(c), and major alternatives to other test methods under §63.7(e)(2)(ii) and (f), as defined in §63.90, and as required in this subpart.

(3) Approval of major alternatives to monitoring under §63.8(f), as defined in §63.90, and as required in this subpart.

(4) Approval of major alternatives to recordkeeping and reporting under §63.10(f), as defined in §63.90, and as required in this subpart.

[68 FR 37354, June 23, 2003]

### **§§ 63.832-63.839 [Reserved]**

**Table 1 to Subpart KK of Part 63—Applicability of General Provisions to Subpart KK**

| <b>General provisions reference</b> | <b>Applicable to subpart KK</b> | <b>Comment</b>    |
|-------------------------------------|---------------------------------|-------------------|
| §63.1(a)(1)–(a)(4)                  | Yes.                            |                   |
| §63.1(a)(5)                         | No                              | Section reserved. |
| §63.1(a)(6)–(a)(8)                  | No.                             |                   |
| §63.1(a)(9)                         | No                              | Section reserved. |

|                          |      |   |
|--------------------------|------|---|
| §63.1(a)(10)–<br>(a)(14) | Yes. |   |
| §63.1(b)(1)              | No   | Subpart KK specifies applicability.         |
| §63.1(b)(2)–(b)(3)       | Yes. |   |
| §63.1(c)(1)              | Yes. |   |
| §63.1(c)(2)              | No   | Area sources are not subject to subpart KK. |
| §63.1(c)(3)              | No   | Section reserved.                           |
| §63.1(c)(4)              | Yes. |   |
| §63.1(c)(5)              | No.  |   |
| §63.1(d)                 | No   | Section reserved.                           |
| §63.1(e)                 | Yes. |   |
| §63.2                    | Yes  | Additional definitions in subpart KK.       |
| §63.3(a)–(c)             | Yes. |   |
| §63.4(a)(1)–(a)(3)       | Yes. |   |
| §63.4(a)(4)              | No   | Section reserved.                           |
| §63.4(a)(5)              | Yes. |   |
| §63.4(b)–(c)             | Yes. |   |
| §63.5(a)(1)–(a)(2)       | Yes. |   |
| §63.5(b)(1)              | Yes. |   |
| §63.5(b)(2)              | No   | Section reserved.                           |
| §63.5(b)(3)–(b)(6)       | Yes. |   |
| §63.5(c)                 | No   | Section reserved.                           |
| §63.5(d)                 | Yes. |   |
| §63.5(e)                 | Yes. |   |
| §63.5(f)                 | Yes. |   |
| §63.6(a)                 | Yes. |   |
| §63.6(b)(1)–(b)(5)       | Yes. |   |
| §63.6(b)(6)              | No   | Section reserved.                           |
| §63.6(b)(7)              | Yes. |   |
| §63.6(c)(1)–(c)(2)       | Yes. |   |
| §63.6(c)(3)–(c)(4)       | No   | Sections reserved.                          |

|                     |      |  |
|---------------------|------|--|
| §63.6(c)(5)         | Yes. |  |
| §63.6(d)            | No   | Section reserved.  |
| §63.6(e)            | Yes  | Provisions pertaining to start-ups, shutdowns, malfunctions, and CMS do not apply unless an add-on control system is used. |
| §63.6(f)            | Yes. |  |
| §63.6(g)            | Yes. |  |
| §63.6(h)            | No   | Subpart KK does not require COMS.  |
| §63.6(i)(1)–(i)(14) | Yes. |  |
| §63.6(i)(15)        | No   | Section reserved.  |
| §63.6(i)(16)        | Yes. |  |
| §63.6(j)            | Yes. |  |
| §63.7               | Yes. |  |
| §63.8(a)(1)–(a)(2)  | Yes. |  |
| §63.8(a)(3)         | No   | Section reserved.  |
| §63.8(a)(4)         | No   | Subpart KK specifies the use of solvent recovery devices or oxidizers.   |
| §63.8(b)            | Yes. |  |
| §63.8(c)(1)–(3)     | Yes. |  |
| §63.8(c)(4)         | No   | Subpart KK specifies CMS sampling requirements.  |
| §63.8(c)(5)         | No   | Subpart KK does not require COMS.  |
| §63.8(c)(6)–(c)(8)  | Yes  | Provisions for COMS are not applicable.  |
| §63.8(d)–(f)        | Yes. |  |
| §63.8(g)            | No   | Subpart KK specifies CMS data reduction requirements.  |
| §63.9(a)            | Yes. |  |
| §63.9(b)(1)         | Yes. |  |
| §63.9(b)(2)         | Yes  | Initial notification submission date extended.   |
| §63.9(b)(3)–(b)(5)  | Yes. |  |
| §63.9(c)–(e)        | Yes. |  |
| §63.9(f)            | No   | Subpart KK does not require opacity and visible emissions observations.  |

|                           |      |   |
|---------------------------|------|---|
| §63.9(g)                  | Yes  | Provisions for COMS are not applicable.                                 |
| §63.9(h)(1)–(h)(3)        | Yes. |   |
| §63.9(h)(4)               | No   | Section reserved.   |
| §63.9(h)(5)–(h)(6)        | Yes. |   |
| §63.9(i)                  | Yes. |   |
| §63.9(j)                  | Yes. |   |
| §63.10(a)                 | Yes. |   |
| §63.10(b)(1)–(b)(3)       | Yes. |   |
| §63.10(c)(1)              | Yes. |   |
| §63.10(c)(2)–(c)(4)       | No   | Sections reserved.  |
| §63.10(c)(5)–(c)(8)       | Yes. |   |
| §63.10(c)(9)              | No   | Section reserved.   |
| §63.10(c)(10)–<br>(c)(15) | Yes. |   |
| §63.10(d)(1)–(d)(2)       | Yes. |   |
| §63.10(d)(3)              | No   | Subpart KK does not require opacity and visible emissions observations. |
| §63.10(d)(4)–(d)(5)       | Yes. |   |
| §63.10(e)                 | Yes  | Provisions for COMS are not applicable.                                 |
| §63.10(f)                 | Yes. |   |
| §63.11                    | No   | Subpart KK specifies the use of solvent recovery devices or oxidizers.  |
| §63.12                    | Yes. |   |
| §63.13                    | Yes. |   |
| §63.14                    | Yes. |   |
| §63.15                    | Yes. |   |

## Appendix A to Subpart KK of Part 63—Data Quality Objective and Lower Confidence Limit Approaches for Alternative Capture Efficiency Protocols and Test Methods

### 1. Introduction

1.1 Alternative capture efficiency (CE) protocols and test methods that satisfy the criteria of either the data quality objective (DQO) approach or the lower confidence limit (LCL) approach are acceptable under §63.827(f). The general criteria for alternative CE protocols and test methods to qualify under either the DQO or LCL approach are described in section 2. The DQO approach and criteria specific to the DQO approach are described in section 3. The LCL approach and criteria specific to the LCL approach are described in section 4. The recommended reporting for alternative CE



protocols and test methods are presented in section 5. The recommended recordkeeping for alternative CE protocols and test methods are presented in section 6.

1.2 Although the Procedures L, G.1, G.2, F.1, and F.2 in §52.741 of part 52 were developed for TTE and BE testing, the same procedures can also be used in an alternative CE protocol. For example, a traditional liquid/gas mass balance CE protocol could employ Procedure L to measure liquid VOC input and Procedure G.1 to measure captured VOC.

## 2. General Criteria for DQO and LCL Approaches

2.1 The following general criteria must be met for an alternative capture efficiency protocol and test methods to qualify under the DQO or LCL approach.

2.2 An alternative CE protocol must consist of at least three valid test runs. Each test run must be at least 20 minutes long. No test run can be longer than 24 hours.

2.3 All test runs must be separate and independent. For example, liquid VOC input and output must be determined independently for each run. The final liquid VOC sample from one run cannot be the initial sample for another run. In addition, liquid input for an entire day cannot be apportioned among test runs based on production.

2.4 Composite liquid samples cannot be used to obtain an "average composition" for a test run. For example, separate initial and final coating samples must be taken and analyzed for each run; initial and final samples cannot be combined prior to analysis to derive an "average composition" for the test run.

2.5 All individual test runs that result in a CE of greater than 105 percent are invalid and must be discarded.


2.6 If the source can demonstrate to the regulatory agency that a test run should not be considered due to an identified testing or analysis error such as spillage of part of the sample during shipping or an upset or improper operating conditions that is not considered part of normal operation then the test result for that individual test run may be discarded. This limited exception allows sources to discard as "outliers" certain individual test runs without replacing them with a valid test run as long as the facility has at least three valid test runs to use when calculating its DQO or LCL. This exception is limited solely to test runs involving the types of errors identified above.

2.7 All valid test runs that are conducted must be included in the average CE determination. The individual test run CE results and average CE results cannot be truncated (i.e., 105 percent cannot be reported as 100+ percent) for purposes of meeting general or specific criteria for either the DQO or the LCL. If the DQO is satisfied and the average CE is greater than 100, then 100 percent CE must be considered the result of the test.

2.8 Alternative test methods for measuring VOC concentration must include a three-point calibration of the gas analysis instrument in the expected concentration range.

## 3. Data Quality Objective Approach

3.1 The purpose of the DQO is to allow sources to use alternative CE protocols and test methods while ensuring reasonable precision consistent with pertinent requirements of the Clean Air Act. In addition to the general criteria described in section 2, the specific DQO criterion is that the width of the two-sided 95 percent confidence interval of the mean measured value must be less than or equal to 10 percent of the mean measured value (see Figure 1). This ensures that 95 percent of the time, when the DQO is met, the actual CE value will be  $\pm 5$  percent of the mean measured value (assuming that the test protocol is unbiased).

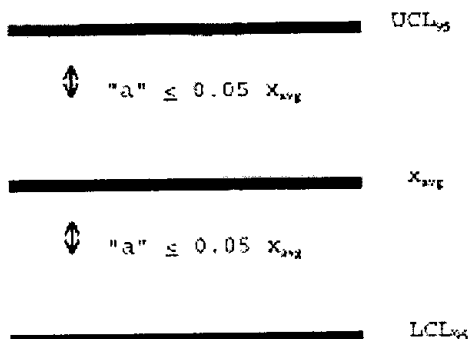

3.2 The DQO calculation is made as follows using Equations 1 and 2:

$$P = \left[ \frac{a}{x_{avg}} \right] 100 \quad \text{Eq. 1}$$

$$a = \frac{t_{0.975} s}{\sqrt{n}} \quad \text{Eq. 2}$$

Where:

a = Distance from the average measured CE value to the endpoints of the 95-percent (two-sided) confidence interval for the measured value.

n = Number of valid test runs.

P = DQO indicator statistic, distance from the average measured CE value to the endpoints of the 95-percent (two-sided) confidence interval, expressed as a percent of the average measured CE value.

s = Sample standard deviation.

$t_{0.975}$  = t-value at the 95-percent (two-sided) confidence level (see Table A-1).

$x_{avg}$  = Average measured CE value (calculated from all valid test runs).

$x_i$  = The CE value calculated from the *i*th test run.

**Table A-1—t-Values**

| Number of valid test runs, n | $t_{0.975}$ | $t_{0.90}$ |
|------------------------------|-------------|------------|
| 1 or 2                       | N/A         | N/A        |
| 3                            | 4.303       | 1.886      |
| 4                            | 3.182       | 1.638      |
| 5                            | 2.776       | 1.533      |
| 6                            | 2.571       | 1.476      |
| 7                            | 2.447       | 1.440      |
| 8                            | 2.365       | 1.415      |
| 9                            | 2.306       | 1.397      |
| 10                           | 2.262       | 1.383      |
| 11                           | 2.228       | 1.372      |
| 12                           | 2.201       | 1.363      |

|    |       |       |
|----|-------|-------|
| 13 | 2.179 | 1.356 |
| 14 | 2.160 | 1.350 |
| 15 | 2.145 | 1.345 |
| 16 | 2.131 | 1.341 |
| 17 | 2.120 | 1.337 |
| 18 | 2.110 | 1.333 |
| 19 | 2.101 | 1.330 |
| 20 | 2.093 | 1.328 |
| 21 | 2.086 | 1.325 |

3.3 The sample standard deviation and average CE value are calculated using Equations 3 and 4 as follows:

$$s = \left[ \frac{\sum_{i=1}^n (x_i - x_{avg})^2}{n-1} \right]^{0.5} \quad Eq\ 3 \quad x_{avg} = \frac{\sum_{i=1}^n x_i}{n} \quad Eq\ 4$$

3.4 The DQO criteria are achieved when all of the general criteria in section 2 are achieved and P ≤5 percent (i.e., the specific DQO criterion is achieved). In order to meet this objective, facilities may have to conduct more than three test runs. Examples of calculating P, given a finite number of test runs, are shown below. (For purposes of this example it is assumed that all of the general criteria are met.)

3.5 Facility A conducted a CE test using a traditional liquid/gas mass balance and submitted the following results and the calculations shown in Equations 5 and 6:

| Run | CE    |
|-----|-------|
| 1   | 96.1  |
| 2   | 105.0 |
| 3   | 101.2 |

Therefore:

$$n=3$$

$$t_{0.975}=4.30$$

$$x_{avg}=100.8$$

$$s=4.51$$

$$\alpha = \frac{(4.30)(4.51)}{\sqrt{n}} = 11.20 \quad \text{Eq 5} \quad P = \frac{11.2}{100.8} 100 = 11.11 \quad \text{Eq 6}$$

3.6 Since the facility did not meet the specific DQO criterion, they ran three more test runs.

| Run | CE   |
|-----|------|
| 4   | 93.2 |
| 5   | 96.2 |
| 6   | 87.6 |

3.7 The calculations for Runs 1–6 are made as follows using Equations 7 and 8:

$$n=6$$

$$t_{0.975}=2.57$$

$$\bar{x}_{\text{avg}}=96.6$$

$$s=6.11$$

$$\alpha = \frac{(2.57)(6.11)}{\sqrt{6}} = 6.41 \quad \text{Eq 7} \quad P = \frac{6.41}{96.6} 100 = 6.64 \quad \text{Eq 8}$$

3.8 The facility still did not meet the specific DQO criterion. They ran three more test runs with the following results:

| Run | CE   |
|-----|------|
| 7   | 92.9 |
| 8   | 98.3 |
| 9   | 91.0 |

3.9 The calculations for Runs 1–9 are made as follows using Equations 9 and 10:

$$n=9$$

$$t_{0.975}=2.31$$

$$\bar{x}_{\text{avg}}=95.7$$

$$s=5.33$$

$$\alpha = \frac{(2.31)(5.33)}{\sqrt{9}} = 4.10 \quad \text{Eq 9} \quad P = \frac{4.10}{95.7} 100 = 4.28 \quad \text{Eq 10}$$

3.10 Based on these results, the specific DQO criterion is satisfied. Since all of the general criteria were also satisfied, the average CE from the nine test runs can be used to determine compliance.

#### 4. Lower Confidence Limit Approach

4.1 The purpose of the LCL approach is to provide sources, that may be performing much better than their applicable regulatory requirement, a screening option by which they can demonstrate compliance. The approach uses less precise methods and avoids additional test runs which might otherwise be needed to meet the specific DQO criterion while still being assured of correctly demonstrating compliance. It is designed to reduce "false positive" or so called "Type II errors" which may erroneously indicate compliance where more variable test methods are employed. Because it encourages CE performance greater than that required in exchange for reduced compliance demonstration burden, the sources that successfully use the LCL approach could produce emission reductions beyond allowable emissions. Thus, it could provide additional benefits to the environment as well.

4.2 The LCL approach compares the 80 percent (two-sided) LCL for the mean measured CE value to the applicable CE regulatory requirement. In addition to the general criteria described in section 2, the specific LCL criteria are that either the LCL be greater than or equal to the applicable CE regulatory requirement or that the specific DQO criterion is met. A more detailed description of the LCL approach follows:

4.3 A source conducts an initial series of at least three runs. The owner or operator may choose to conduct additional test runs during the initial test if desired.

4.4 If all of the general criteria are met and the specific DQO criterion is met, then the average CE value is used to determine compliance.

4.5 If the data meet all of the general criteria, but do not meet the specific DQO criterion; and the average CE, using all valid test runs, is above 100 percent then the test sequence cannot be used to calculate the LCL. At this point the facility has the option of (a) conducting more test runs in hopes of meeting the DQO or of bringing the average CE for all test runs below 100 percent so the LCL can be used or (b) discarding all previous test data and retesting.

4.6 The purpose of the requirement in Section 4.5 is to protect against protocols and test methods which may be inherently biased high. This is important because it is impossible to have an actual CE greater than 100 percent and the LCL approach only looks at the lower end variability of the test results. This is different from the DQO which allows average CE values up to 105 percent because the DQO sets both upper and lower limits on test variability.

4.7 If at any point during testing the results meet the DQO, the average CE can be used for demonstrating compliance with the applicable regulatory requirement. Similarly, if the average CE is below 100 percent then the LCL can be used for demonstrating compliance with the applicable regulatory requirement without regard to the DQO.

4.8 The LCL is calculated at an 80 percent (two-sided) confidence level as follows using Equation 11:

$$LC_1 = \bar{x}_{avg} - \frac{t_{0.90} s}{\sqrt{n}} \quad \text{Eq 11}$$

Where:

$LC_1$  = LCL at an 80-percent (two-sided) confidence level.

$n$  = Number of valid test runs.

$s$  = Sample standard deviation.

$t_{0.90}$  = t-value at the 80-percent (two-sided) confidence level (see Table A-1).

$\bar{x}_{avg}$  = Average measured CE value (calculated from all valid test runs).

4.9 The resulting  $LC_1$  is compared to the applicable CE regulatory requirement. If  $LC_1$  exceeds (i.e., is higher than) the applicable regulatory requirement, then a facility is in initial compliance. However, if the  $LC_1$  is below the CE requirement, then the facility must conduct additional test runs. After this point the test results will be evaluated not only looking at the LCL, but also the DQO of  $\pm 5$  percent of the mean at a 95 percent confidence level. If the test results with the additional test runs meet the DQO before the LCL exceeds the applicable CE regulatory requirement, then the average CE value will be compared to the applicable CE regulatory requirement for determination of compliance.

4.10 If there is no specific CE requirement in the applicable regulation, then the applicable CE regulatory requirement is determined based on the applicable regulation and an acceptable destruction efficiency test. If the applicable regulation requires daily compliance and the latest CE compliance demonstration was made using the LCL approach, then the calculated LC<sub>1</sub> will be the highest CE value which a facility is allowed to claim until another CE demonstration test is conducted. This last requirement is necessary to assure both sufficiently reliable test results in all circumstances and the potential environmental benefits referenced above.

4.11 An example of calculating the LCL is shown below. Facility B's applicable regulatory requirement is 85 percent CE. Facility B conducted a CE test using a traditional liquid/gas mass balance and submitted the following results and the calculation shown in Equation 12:

| Run | CE   |
|-----|------|
| 1   | 94.2 |
| 2   | 97.6 |
| 3   | 90.5 |

Therefore:

$$n=3$$

$$t_{0.90}=1.886$$

$$x_{avg}=94.1$$

$$s=3.55$$

$$LC_1 = 94.1 - \frac{(1.886)(3.55)}{\sqrt{3}} = 90.23 \quad Eq\ 12$$

4.12 Since the LC<sub>1</sub> of 90.23 percent is above the applicable regulatory requirement of 85 percent then the facility is in compliance. The facility must continue to accept the LC<sub>1</sub> of 90.23 percent as its CE value until a new series of valid tests is conducted. (The data generated by Facility B do not meet the specific DQO criterion.)

#### 5. Recommended Reporting for Alternative CE Protocols

5.1 If a facility chooses to use alternative CE protocols and test methods that satisfy either the DQO or LCL and the additional criteria in section 4., the following information should be submitted with each test report to the appropriate regulatory agency:

1. A copy of all alternative test methods, including any changes to the EPA reference methods, QA/QC procedures and calibration procedures.
2. A table with information on each liquid sample, including the sample identification, where and when the sample was taken, and the VOC content of the sample;
3. The coating usage for each test run (for protocols in which the liquid VOC input is to be determined);
4. The quantity of captured VOC measured for each test run;
5. The CE calculations and results for each test run;
6. The DQO or LCL calculations and results; and

7. The QA/QC results, including information on calibrations (e.g., how often the instruments were calibrated, the calibration results, and information on calibration gases, if applicable).

6. *Recommended Recordkeeping for Alternative CE Protocols.*

6.1 A record should be kept at the facility of all raw data recorded during the test in a suitable form for submittal to the appropriate regulatory authority upon request.

[61 FR 27140, May 30, 1996, as amended at 71 FR 29804, May 24, 2006]

[Browse Previous](#) | [Browse Next](#)

---

For questions or comments regarding e-CFR editorial content, features, or design, email [ecfr@nara.gov](mailto:ecfr@nara.gov).

For questions concerning e-CFR programming and delivery issues, email [webteam@gpo.gov](mailto:webteam@gpo.gov).

[Section 508 / Accessibility](#)

