

# ADEQ

ARKANSAS  
Department of Environmental Quality

DEC 11 2018

Greg May, Plant Manager  
Acme Brick Company - Jonesboro Plant  
2905 Dan Avenue  
Jonesboro, AR 72401


Dear Mr. May:

The enclosed Permit No. 2004-AOP-R4 is your authority to construct, operate, and maintain the equipment and/or control apparatus as set forth in your application initially received on 5/11/2018.

After considering the facts and requirements of A.C.A. §8-4-101 et seq. as referenced by §8-4-304, and implementing regulations, I have determined that Permit No. 2004-AOP-R4 for the construction and operation of equipment at Acme Brick Company - Jonesboro Plant shall be issued and effective on the date specified in the permit, unless a Commission review has been properly requested under Arkansas Department of Pollution Control & Ecology Commission's Administrative Procedures, Regulation 8, within thirty (30) days after service of this decision.

The applicant or permittee and any other person submitting public comments on the record may request an adjudicatory hearing and Commission review of the final permitting decisions as provided under Chapter Six of Regulation No. 8, Administrative Procedures, Arkansas Pollution Control and Ecology Commission. Such a request shall be in the form and manner required by Regulation 8.603, including filing a written Request for Hearing with the APC&E Commission Secretary at 101 E. Capitol Ave., Suite 205, Little Rock, Arkansas 72201. If you have any questions about filing the request, please call the Commission at 501-682-7890.

Sincerely,



Stuart Spencer  
Associate Director, Office of Air Quality

Enclosure: Final Permit

## RESPONSE TO COMMENTS

### ACME BRICK COMPANY - JONESBORO PLANT PERMIT #2004-AOP-R4 AFIN: 16-00002

On September 22, 2018 and September 23, 2018, the Director of the Arkansas Department of Environmental Quality gave notice of a draft permitting decision for the above referenced facility. During the comment period, written comments on the draft permitting decision were submitted by Shannon Lynn, Consultant, on behalf of the facility. The Department's response to these issues follows.

*Note: The following page numbers and condition numbers refer to the draft permit. These references may have changed in the final permit based on changes made during the comment period.*

#### **Comment #1:**

The permittee requests all references to 'Wheeler' changed to 'Jonesboro'.

#### **Response to Comment #1:**

The requested change has been made as requested.

#### **Comment #2:**

Emissions Summary Table, Page 7. The permittee requests there be no HAP listed for the Dryer.

#### **Response to Comment #2:**

HAPs were listed as a pollutant emitted in the application and in previous permits for this source. There is no justification for not listing them in the permit. The permit will remain as written.

#### **Comment #3:**

Page7, Emissions Summary Table, rename 'SN-04 Roller Mill' to 'SN-04 Roller Mill and Associated Transfer Points'

#### **Response to Comment #3:**

The above change has been made as requested.

#### **Comment #4:**

Page7, Emission Summary Table, remove 'SN-05 Hammermill' from this summary, as it has been demonstrated to be an Insignificant Activity.

#### **Response to Comment #4:**

The above change has been made as requested.

#### **Comment #5:**

Page10, Specific Condition 4. The permittee requests that the opacity requirement for the dryer be removed and Specific Condition 4 be deleted. The dryer is operated at a low temperature and,

as evident from the emissions estimates, would not have any visible emissions. Such a requirement is not required on the kiln stack. Thus, we request it be removed.

**Response to Comment #5:**

This request was not made in the application and therefore not reviewed nor noticed as part of the permit decision. Further, there is no reliable method of estimating opacity based on mass emission rates alone. The department is not opposed to considering such requests that are made as part of a permit application and include items such as past history of opacity observations. The permit will remain as written.

**Comment #6:**

Page 11, Source Description, please revise the source description for SN-02 as follows,

‘Source SN-02 is the tunnel kiln exhaust. The kiln is natural gas fired and divided into three zones: preheat, firing and cooling. Heat for the brick dryer is supplied from the kiln’s cooling zone. Products of combustion and pollutants associated with the firing of the bricks are emitted from the kiln. This unit was installed in 1978.’

**Response to Comment #6:**

The Source description has been written as requested above.

**Comment #7:**

Page 13, Specific Condition 16. 40 CFR 63.8470(e)(2) allows for annual stack testing to demonstrate compliance with the opacity limit. The permittee requests that this option also be included in the permit. This is also referenced in Specific Condition 27, Table 6, Item 5.

**Response to Comment #7:**

Specific Condition 8 has been added to the permit and shall read as follows:

“8. For SN-02, in lieu of meeting the requirements under paragraph (e)(1) of § 63.8470, the permittee may conduct a PM test at least every year following the initial performance test, according to the procedures of Method 5 of 40 C.F.R. § 60, Appendix A-3, and the provisions of § 63.8445(e) and (f)(1).

[Reg. 19.304 and 40 C.F.R. § 63.8470(e)(2)]

**Comment #8:**

Page 21. The permittee requests the Table 6 header in bold font.

**Response to Comment #8:**

The above request has been made as requested.

**Comment #9:**

The permittee requests the hammermill to be added to the Insignificant Activities list.

**Response to Comment #9:**

The above request has been made as requested.

# ADEQ OPERATING AIR PERMIT

Pursuant to the Regulations of the Arkansas Operating Air Permit Program, Regulation 26:

Permit No. : 2004-AOP-R4

IS ISSUED TO:


Acme Brick Company - Jonesboro Plant  
2905 Dan Avenue  
Jonesboro, AR 72401  
Craighead County  
AFIN: 16-00002

THIS PERMIT AUTHORIZES THE ABOVE REFERENCED PERMITTEE TO INSTALL, OPERATE, AND MAINTAIN THE EQUIPMENT AND EMISSION UNITS DESCRIBED IN THE PERMIT APPLICATION AND ON THE FOLLOWING PAGES. THIS PERMIT IS VALID BETWEEN:

March 9, 2015 AND March 8, 2020

THE PERMITTEE IS SUBJECT TO ALL LIMITS AND CONDITIONS CONTAINED HEREIN.

Signed:

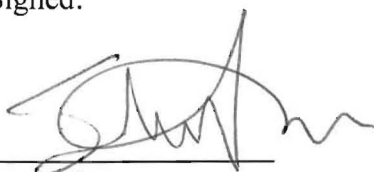

Stuart Spencer  
Associate Director, Office of Air Quality

DEC 11 2018

\_\_\_\_\_  
Date

Acme Brick Company - Jonesboro Plant  
Permit #: 2004-AOP-R4  
AFIN: 16-00002

Table of Contents

<b>SECTION I: FACILITY INFORMATION</b> .....	4
<b>SECTION II: INTRODUCTION</b> .....	5
<b>Summary of Permit Activity</b> .....	5
<b>Process Description</b> .....	5
<b>Regulations</b> .....	6
<b>Emission Summary</b> .....	6
<b>SECTION III: PERMIT HISTORY</b> .....	8
<b>SECTION IV: SPECIFIC CONDITIONS</b> .....	9
SN-01 .....	9
SN-02 .....	11
SN-03 .....	28
SN-04, Roller Mill and Associated Transfer Points .....	32
<b>SECTION V: COMPLIANCE PLAN AND SCHEDULE</b> .....	37
<b>SECTION VI: PLANTWIDE CONDITIONS</b> .....	38
<b>SECTION VII: INSIGNIFICANT ACTIVITIES</b> .....	40
<b>SECTION VIII: GENERAL PROVISIONS</b> .....	42
Appendix A - 40 C.F.R. § 60, Subpart OOO	
Appendix B - 40 C.F.R. § 63, Subpart ZZZZ	
Appendix C - 40 C.F.R. § 63, Subpart JJJJ	

Acme Brick Company - Jonesboro Plant  
Permit #: 2004-AOP-R4  
AFIN: 16-00002

#### List of Acronyms and Abbreviations

Ark. Code Ann.	Arkansas Code Annotated
AFIN	ADEQ Facility Identification Number
C.F.R.	Code of Federal Regulations
CO	Carbon Monoxide
HAP	Hazardous Air Pollutant
lb/hr	Pound Per Hour
MVAC	Motor Vehicle Air Conditioner
No.	Number
NO <sub>x</sub>	Nitrogen Oxide
PM	Particulate Matter
PM <sub>10</sub>	Particulate Matter Smaller Than Ten Microns
SNAP	Significant New Alternatives Program (SNAP)
SO <sub>2</sub>	Sulfur Dioxide
SSM	Startup, Shutdown, and Malfunction Plan
Tpy	Tons Per Year
UTM	Universal Transverse Mercator
VOC	Volatile Organic Compound

Acme Brick Company - Jonesboro Plant  
Permit #: 2004-AOP-R4  
AFIN: 16-00002

## SECTION I: FACILITY INFORMATION

PERMITTEE: Acme Brick Company - Jonesboro Plant

AFIN: 16-00002

PERMIT NUMBER: 2004-AOP-R4

FACILITY ADDRESS: 2905 Dan Avenue  
Jonesboro, AR 72401

MAILING ADDRESS: 2905 Dan Avenue  
Jonesboro, AR 72401

COUNTY: Craighead County

CONTACT NAME: Greg May

CONTACT POSITION: Plant Manager

TELEPHONE NUMBER: (870) 935-5182

REVIEWING ENGINEER: Derrick Brown

UTM North South (Y): Zone 15: 3969817.87 m

UTM East West (X): Zone 15: 702638.48 m



## **SECTION II: INTRODUCTION**

### **Summary of Permit Activity**

Acme Brick Company owns and operates a clay brick manufacturing facility located at 2905 Dan Avenue in Jonesboro, Arkansas. This facility manufactures hard fired clay brick for use in the construction of commercial and residential structures. This modification incorporates the results of performance testing performed in 2016 and 2017, and also incorporates the requirements of 40 C.F.R. § 63, Subpart JJJJ, and 40 C.F.R. § 60, Subpart OOO. This modification increases permitted emissions by 5.4 tpy of PM/PM<sub>10</sub>, 14.6 tpy of SO<sub>2</sub>, 14.8 tpy of VOC, 179.8 tpy of CO, 0.5 tpy of NO<sub>x</sub>, 12.03 tpy of HF, and 8.67 tpy of HCl.

### **Process Description**

Raw materials (surface clays) are delivered by truck to the facility. The clays are stored inside the raw clay storage building. Material not adequately sized is processed through a primary crusher. Initial blending of clays and other raw material takes place following the initial crushing. A mixture of clay, lightweight aggregate, granite fines, scrap brick, and other materials is prepared.

This material is then conveyed to a hammer mill. Initial sizing is performed by screening. Final sizing is performed by a smooth roller mill. An additive, such as manganese dioxide may be added to the mixture at this point.

Following the roller mill, the mixture is routed to a pug mill where water and additive A (lignosulfonate) may be added. Additive A is sometimes added as a lubricant to facilitate the extrusion process and as a binder while the extruded ware is in its green state. This mixture is then discharged into a vacuum chamber and then into the extruder. Brick are formed by extrusion through a die using the stiff extrusion process. All excess green scrap is conveyed back to the pug mill for reprocessing.

Sand and colorants are often added to the surface of the extruded column to provide texture and/or coloring. The extruded column is then cut into brick using a wire cutting machine. The brick are then mechanically grouped and stacked onto a kiln car transferred to pre-drying storage (holding room).

The kiln cars then pass from the holding room through the dryer (SN-01). Heat from the dryer is supplied from the tunnel kiln's cooling zone. A natural gas supplemental burner is installed to add heat in the dryer in the event that the kiln waste heat is not adequate.

After drying, the brick are transferred into the tunnel kiln (SN-02) for firing. The kiln is fueled by natural gas. After cooling, the brick are packaged and stored for shipping.

### Regulations

The following table contains the regulations applicable to this permit.

Regulations
Arkansas Air Pollution Control Code, Regulation 18, effective March 14, 2016
Regulations of the Arkansas Plan of Implementation for Air Pollution Control, Regulation 19, effective March 14, 2016
Regulations of the Arkansas Operating Air Permit Program, Regulation 26, effective March 14, 2016
40 C.F.R. § 60, Subpart OOO, <i>Standards of Performance for Nonmetallic Mineral Processing Plants</i>
40 C.F.R. § 63, Subpart JJJJ, <i>National Emission Standards for Hazardous Air Pollutants for Brick and Structural Clay Products Manufacturing</i>
40 C.F.R. § 63, Subpart ZZZZ, <i>National Emission Standards for Hazardous Air Pollutants for Stationary Reciprocating Internal Combustion Engines</i>

### Emission Summary

The following table is a summary of emissions from the facility. This table, in itself, is not an enforceable condition of the permit.

EMISSION SUMMARY				
Source Number	Description	Pollutant	Emission Rates	
			lb/hr	tpy
Total Allowable Emissions		PM	4.7	19.3
		PM <sub>10</sub>	4.7	19.3
		SO <sub>2</sub>	11.8	50.2
		VOC	5.2	20.2
		CO	52.8	214.8
		NO <sub>x</sub>	6.5	15.1
	HAPs*	HF	8.01	35.10
		HCl	2.67	11.7
		Other HAPs*	0.12	0.43
01	Dryer	PM	0.6	2.4
		PM <sub>10</sub>	0.6	2.4
		SO <sub>2</sub>	0.1	0.1
		VOC	0.1	0.2

Acme Brick Company - Jonesboro Plant

Permit #: 2004-AOP-R4

AFIN: 16-00002

EMISSION SUMMARY				
Source Number	Description	Pollutant	Emission Rates	
			lb/hr	tpy
		CO	0.5	1.8
		NO <sub>x</sub>	0.5	2.2
		HAPs	0.01	0.04
02	Kiln	PM	3.8	16.7
		PM <sub>10</sub>	3.8	16.7
		SO <sub>2</sub>	11.4	50.0
		VOC	4.6	19.8
		CO	48.4	212.0
		NO <sub>x</sub>	2.8	12.1
		HF	8.01	35.1
		HCl	2.67	11.7
		Other HAPs	0.10	0.38
03	Emergency Backup Generator	PM	0.2	0.1
		PM <sub>10</sub>	0.2	0.1
		SO <sub>2</sub>	0.3	0.1
		VOC	0.5	0.2
		CO	3.9	1.0
		NO <sub>x</sub>	3.2	0.8
		HAPs	0.01	0.01
04	Roller Mill and Associated Transfer Points	PM	0.1	0.1
		PM <sub>10</sub>	0.1	0.1

\*HAPs included in the VOC totals. Other HAPs are not included in any other totals unless specifically stated.

\*\*Air Contaminants such as ammonia, acetone, and certain halogenated solvents are not VOCs or HAPs.

Acme Brick Company - Jonesboro Plant  
Permit #: 2004-AOP-R4  
AFIN: 16-00002

### **SECTION III: PERMIT HISTORY**

Air permit 2004-AOP-R0 was issued on November 16, 1998. This was the first air permit ever issued to Wheeler Brick Company, Inc. This facility has been in operation since 1966. With issuance of this permit, the facility modified their current operation by the addition of a foam dust suppression system on the roller mill which is part of the crushing and grinding operation.

Air Permit 2004-AOP-R1 was issued to Wheeler Brick Company, Inc. on December 12, 2002. The air permit was modified by raising the permitted heat capacity of the brick drying kiln from 12.5 to 19 MMBtu/hr. There were no physical changes to the kiln (past estimates of heat input were understated). No increase in emissions was necessary because emissions were based on the permitted brick throughput (7.7 ton/hr), which remained unchanged. The kiln production records indicated that the heat input of the kiln would need to be approximately 19 MMBtu/hr for maximum production of 7.7 tons of brick per hour.

Air Permit 2004-AOP-R2 was issued on August 29, 2003. This Title V permit renewal changed one source (SN-01) from an insignificant activity (Group C Number 5) to a permitted emission source, and it increased the permitted production rate from 67,450 tons per year (tpy) to 75,000 tpy of fired ware. The proposed change resulted in an increase of 17.2 tpy of PM emissions, 20.2 tpy of PM<sub>10</sub> emissions, 1.3 tpy of SO<sub>2</sub> emissions, 25.6 tpy of CO emissions, 7.9 tpy of NO<sub>x</sub> emissions, 1.8 tpy of VOC emissions, 3.7 tpy of HF emissions, and 1.27 tpy of HCL emissions.

Air Permit 2004-AOP-R3 was issued March 9, 2015. This permit was the renewal of the Title V permit for the facility. There were no physical changes occurring but emissions were revised based on testing of another Acme facility and the emergency generator was moved from an insignificant activity to a permitted source with the requirements of 40 C.F.R. § 63, Subpart ZZZZ included. Permitted emissions were decreased by 35.6, 31.15, 5.18 and 3.98 tons per year of particulates, CO, NO<sub>x</sub> and HCl, respectively. Permitted emissions increased by 6.95, 2.75 and 2.74 tons per year for SO<sub>2</sub>, VOC and HF, respectively.

**SECTION IV: SPECIFIC CONDITIONS**

SN-01  
 Dryer

Source Description

Source SN-01 is the tunnel dryer exhaust. The tunnel dryer is a continuous heat exchanger which reduces the moisture in the wet brick to approximately 1% by weight. Waste heat from the cooling zone of the kiln is introduced near the dryer exit. An exhaust fan pulls this waste heat toward the entrance end of the dryer as the product flows in the opposite direction. The moisture from the drying operation is exhausted from SN-01. The dryer uses waste heat from the kiln as a heat source. A natural gas supplemental heat burner is installed to add heat in the drier in the event that the kiln waste heat is not adequate. Products of combustion and pollutants associated with the drying of the bricks are emitted from the kiln. The equipment was last modified in 1994.

Specific Conditions

1. The permittee shall not exceed the emission rates set forth in the following table. The permittee shall demonstrate compliance with this condition by Plantwide Condition #7. [Reg.19.501 *et seq.* and 40 C.F.R. § 52 Subpart E]

SN	Description	Pollutant	lb/hr	Tpy
01	Dryer	PM <sub>10</sub>	0.6	2.4
		SO <sub>2</sub>	0.1	0.1
		VOC	0.1	0.2
		CO	0.5	1.8
		NO <sub>x</sub>	0.5	2.2

2. The permittee shall not exceed the emission rates set forth in the following table. The permittee shall demonstrate compliance with this condition by Plantwide Condition #7. [Reg.18.801 and Ark. Code Ann. § 8-4-203 as referenced by Ark. Code Ann. §§ 8-4-304 and 8-4-311]

SN	Description	Pollutant	lb/hr	tpy
01	Dryer	PM	0.6	2.4
		HAPs	0.01	0.04

Acme Brick Company - Jonesboro Plant  
Permit #: 2004-AOP-R4  
AFIN: 16-00002

3. Visible emissions may not exceed the limits specified in the following table of this permit as measured by EPA Reference Method 9.

SN	Limit	Regulatory Citation
01	20%	Reg.19.503 and Ark. Code Ann. § 8-4-203 as referenced by Ark. Code Ann. §§ 8-4-304 and 8-4-311

4. Weekly observations of the opacity from SN-01 shall be conducted by a person trained but not necessarily certified in EPA Reference Method 9. If visible emissions in excess of the permitted levels are detected, the permittee shall immediately take action to identify the cause of the visible emissions in excess of the permit limit, implement corrective action, and document that visible emissions did not appear to be in excess of the permitted opacity following the corrective action. The permittee shall maintain records which contain the following items in order to demonstrate compliance with this specific condition. These records shall be updated weekly, kept on site, and made available to Department personnel upon request.
- The date and time of the observation.
  - If visible emissions which appeared to be above the permitted limit were detected.
  - If visible emissions which appeared to be above the permitted limit were detected, the cause of the exceedance of the opacity limit, the corrective action taken, and if the visible emissions appeared to be below the permitted limit after the corrective action was taken.
  - The name of the person conducting the opacity observations.

[Reg.19.503 and Ark. Code Ann. § 8-4-203 as referenced by Ark. Code Ann. §§ 8-4-304 and 8-4-311]

5. Natural gas will be the only fuel used to fire the dryer supplemental burner, SN-01.  
[Reg.19.705, Ark. Code Ann. § 8-4-203 as referenced by Ark. Code Ann. §§ 8-4-304 and 8-4-311, and 40 C.F.R. § 70.6]

SN-02  
 Tunnel Kiln

Source Description

Source SN-02 is the tunnel kiln exhaust. The kiln is natural gas fired and divided into three zones: preheat, firing and cooling. Heat for the brick dryer is supplied from the kiln's cooling zone. Products of combustion and pollutants associated with the firing of the bricks are emitted from the kiln. This unit was installed in 1978.

Specific Conditions

6. The permittee shall not exceed the emission rates set forth in the following table. The permittee shall demonstrate compliance with this condition by Plantwide Condition #7. [Reg.19.501 *et seq.* and 40 C.F.R. § 52 Subpart E]

SN	Description	Pollutant	lb/hr	Tpy
02	Kiln	PM <sub>10</sub>	3.8	16.7
		SO <sub>2</sub>	11.4	50.0
		VOC	4.6	19.8
		CO	48.4	212.0
		NO <sub>x</sub>	2.8	12.1

7. The permittee shall not exceed the emission rates set forth in the following table. The permittee shall demonstrate compliance with this condition by Plantwide Condition #7. [Reg.18.801 and Ark. Code Ann. § 8-4-203 as referenced by Ark. Code Ann. §§ 8-4-304 and 8-4-311]

SN	Description	Pollutant	lb/hr	tpy
02	Kiln	PM	3.8	16.7
		HF	8.01	35.10
		HCl	2.67	11.70
		Other HAP	0.10	0.38

8. For SN-02, in lieu of meeting the requirements under paragraph (e)(1) of § 63.8470, the permittee may conduct a PM test at least every year following the initial performance test, according to the procedures of Method 5 of 40 C.F.R. § 60, Appendix A-3, and the provisions of § 63.8445(e) and (f)(1). [Reg.19.304 and 40 C.F.R. § 63.8470(e)(2)]
9. SN-02 is subject to and shall comply with all applicable provisions of 40 C.F.R. § 63, Subpart JJJJ – National Emissions Standards for Hazardous Air Pollutants for Brick and Structural Clay Products Manufacturing. The permittee shall comply with the applicable

emission limitations, operating limitations, and other requirements no later than December 26, 2018. [Reg.19.304 and 40 C.F.R. § 63 Subpart JJJJJ]

10. The permittee must comply with this subpart no later than the compliance dates in Table 7 to this subpart. The permittee must meet the notification requirements in Specific Conditions #29 and #30 according to the schedule in Specific Condition #30 and in subpart A of this part. Some of the notifications must be submitted before the permittee is required to comply with the emission limitations in this subpart. [Reg.19.304 and 40 C.F.R. § Subpart JJJJJ Table 7]

**Table 7 to Subpart JJJJJ of Part 63 – Compliance Dates**

<b>If you have a(n) ...</b>	<b>Then you must . . .</b>	<b>No later than ...</b>
3. Existing affected source	Comply with the applicable emission limitations and work practice standards in Tables 1, 2, and 3 to this subpart	December 26, 2018.

11. The permittee shall be in compliance with the emission limitations, operating limitations and other requirements in Subpart JJJJJ that apply to the permittee at all times, except during periods of start-up and shutdown, at which time the permittee must comply with the applicable work practice standards. [Reg.19.304 and 40 C.F.R. § 63.8420(a)]
12. At all times, the permittee must operate and maintain any affected source, including associated air pollution control equipment and monitoring equipment, in a manner consistent with safety and good air pollution control practices for minimizing emissions. The general duty to minimize emissions does not require the permittee to make any further efforts to reduce emissions if levels required by the applicable standard have been achieved. Determination of whether SN-02 is operating in compliance with operation and maintenance requirements will be based on information available to the Administrator which may include, but is not limited to, monitoring results, review of operation and maintenance procedures, review of operation and maintenance records, and inspection of the source. [Reg.19.304 and 40 C.F.R. § 63.8420(b)]
13. The permittee shall limit the emissions of SN-02 of hydrogen fluoride (HF), hydrogen chloride (HCl), and chlorine (Cl<sub>2</sub>) to 57 lb/hr HCl equivalent or less. To determine compliance with the health-based standard for acid gas HAP in the subpart, the HCl-equivalent emission limit for the facility shall be determined using Equations 2 and 3 of 40 CFR §63.8445(f)(2)(i). [Reg.19.304 and 40 C.F.R. § 63.8405(a), and 40 C.F.R. § 63 Subpart JJJJJ Table 1]
14. The permittee shall limit the emissions of SN-02 of PM using one of the following compliance options:
- a. PM emissions must not exceed 0.19 kg/Mg (0.37 lb/ton) of fired product;
  - b. PM emissions must not exceed 4.8 mg/dscm (0.0021 gr/dscf) at 17% O<sub>2</sub>; or



- c. Non-Hg HAP metals emissions must not exceed 0.047 kg/hr (0.11 lb/hr).

[Reg.19.304 and 40 C.F.R. § 63.8405(a), and 40 C.F.R. § 63 Subpart JJJJJ Table 1]

- 15. The permittee shall limit the emissions of SN-02 of mercury (Hg) using one of the following compliance options:
  - a. Hg emissions must not exceed 1.7E-04 kg/Mg (3.3E-04 lb/ton) of fired product;
  - b. Hg emissions must not exceed 91 µg/dscm at 17% O<sub>2</sub>; or
  - c. Hg emissions must not exceed 8.5 E-04 kg/hr (0.0019 lb/hr).

[Reg.19.304 and 40 C.F.R. § 63.840(a), and 40 C.F.R. § 63 Subpart JJJJJ Table 1]

**Table 1 to Subpart JJJJJ of Part 63 – Emission Limits**

<b>For each . . .</b>	<b>You must meet the following emission limits . . .</b>	<b>Or you must comply with the following . . .</b>
1. Collection of all tunnel kilns at facility, including all process streams	HF, HCl, and Cl <sub>2</sub> emissions must not exceed 26 kg/hr (57 lb/hr) HCl equivalent, under the health-based standard, as determined using Equations 2 and 3	Not applicable.
3. Existing small tunnel kiln (design capacity <10 tph of fired product), including all process streams	a. PM emissions must not exceed 0.19 kg/Mg (0.37 lb/ton) of fired product	i. PM emissions must not exceed 4.8 mg/dscm (0.0021 gr/dscf) at 17% O <sub>2</sub> ; or ii. Non-Hg HAP metals emissions must not exceed 0.047 kg/hr (0.11 lb/hr).
	b. Hg emissions must not exceed 1.7 E-04 kg/Mg (3.3 E-04 lb/ton) of fired product	i. Hg emissions must not exceed 91 µg/dscm at 17% O <sub>2</sub> ; or
		ii. Hg emissions must not exceed 8.5 E-04 kg/hr (0.0019 lb/hr).

- 16. The permittee shall establish the site-specific operating limit for kilns with no air pollution control device (APCD) using the maximum potential HCl equivalent as determined using Equation 4 of 40 CFR 63.8445(g)(1)(i). [Reg.19.304 and 40 C.F.R. § 63.8405(b), and 40 C.F.R. § 63 Subpart JJJJJ Table 2]
- 17. The permittee must maintain no visible emissions from the stacks of SN-02, and must maintain the kiln process rate at or below the kiln process rate determined according to

63.8445(g)(1). Visible emissions of less than 10% opacity are not considered a deviation, as noted in 40 CFR §63.8470. [Reg.19.304 and 40 C.F.R. § 63.8405(b), and 40 C.F.R. § 63 Subpart JJJJJ Table 2]

**Table 2 to Subpart JJJJJ of Part 63 – Operating Limits**

For each . . .	You must . . .
5. Tunnel kiln with no add-on control	a. Maintain no VE from the stack. b. Maintain the kiln process rate at or below the kiln process rate determined according to §63.8445(g)(1).

18. The permittee shall minimize emissions during periods of operation through the following work practice standards:
- a. To minimize dioxin/furan emissions:
    - i. Maintain and inspect the burners and associated combustion controls as applicable.
    - ii. Tune the specific burner type to optimize combustion.

[Reg.19.304 and 40 C.F.R. § 63.8405(c), and 40 C.F.R. § 63 Subpart JJJJJ Table 3]

19. The permittee shall minimize emissions during periods of startup through the following work practice standards:
- a. To minimize HAP emissions:
    - i. Establish the startup push rate for each kiln and temperature profile for each kiln without an APCD and include them in the first compliance report as specified in Specific Condition #31.
    - ii. After initial charging of the kiln with loaded kiln cars, remain at or below the startup push rate for the kiln until the kiln temperature profile is attained.

[Reg.19.304 and 40 C.F.R. § 63.8405(c), and 40 C.F.R. § 63 Subpart JJJJJ Table 3]

20. The permittee shall minimize HAP emissions during periods of shutdown through not pushing loaded kiln cars into the kiln when the kiln temperature profile is no longer maintained. [Reg.19.304 and 40 C.F.R. § 63.8405(c), and 40 C.F.R. § 63 Subpart JJJJJ Table 3]

**Table 3 to Subpart JJJJJ of Part 63 – Work Practice Standards**

For each . . .	You must . . .	According to the following requirements . . .
2. Existing, new or reconstructed tunnel kiln	a. Minimize dioxin/furan emissions	i. Maintain and inspect the burners and associated combustion controls (as applicable); and

<b>For each . . .</b>	<b>You must . . .</b>	<b>According to the following requirements . . .</b>
		ii. Tune the specific burner type to optimize combustion.
3. Existing, new or reconstructed tunnel kiln during periods of startup	a. Minimize HAP emissions	i. Establish the startup push rate for each kiln, the minimum APCD inlet temperature for each APCD, and temperature profile for each kiln without an APCD and include them in your first compliance report, as specified in §63.8485(c)(8); and
		ii. After initial charging of the kiln with loaded kiln cars, remain at or below the startup push rate for the kiln until the kiln exhaust reaches the minimum APCD inlet temperature for a kiln with an APCD or until the kiln temperature profile is attained for a kiln with no APCD; and
		iii. If your kiln has an APCD, begin venting the exhaust from the kiln through the APCD by the time the kiln exhaust temperature reaches the minimum APCD inlet temperature.
4. Existing, new or reconstructed tunnel kiln during periods of shutdown	a. Minimize HAP emissions	i. Do not push loaded kiln cars into the kiln once the kiln exhaust temperature falls below the minimum APCD inlet temperature if the kiln is controlled by an APCD or when the kiln temperature profile is no longer maintained for an uncontrolled kiln; and
5. Existing, new or reconstructed tunnel kiln during periods of routine control device maintenance	a. Minimize HAP emissions.	i. Develop and use a temperature profile for each kiln; and ii. Develop and follow maintenance procedures for each kiln that, at a minimum, specify the frequency of inspection and maintenance of temperature monitoring devices and controls that regulate air-to-fuel ratios; and
		iii. Develop and maintain records for each kiln, as specified in §63.8490(a)(3).

21. The permittee must prepare, implement and revise as necessary an operation, maintenance, and monitoring (OM&M) plan that includes the following information:
- a. The process to be monitored, the type of monitoring device that will be used, and the operating parameters that will be monitored.
  - b. A monitoring schedule that specifies the frequency that the parameter values will be determined and recorded.

- c. The limits for each parameter that represent continuous compliance with the emission limits of Specific Conditions #13 through #15. The limits must be based on values of the monitored parameters recorded during performance tests.
- d. Procedures for responding to operating parameter deviations:
  - i. Procedures for determining the cause of the operating parameter deviation.
  - ii. Actions necessary for correcting the deviation and returning the operating parameters to the allowable limits.
  - iii. Procedures for recording the times that the deviation began and ended and corrective actions were initiated and completed.
- e. Procedures for keeping records to document compliance.

[Reg.19.304 and 40 C.F.R. § 63.8425]

22. The permittee must establish each site-specific operating limit in Table 2 to this subpart according to the requirements in 40 CFR §63.8445 and Table 4 to this subpart.  
 [Reg.19.304 and 40 C.F.R. § 63.8455(b)]

23. The permittee must conduct each applicable performance test in Table 4 to this subpart with the following requirements:

- a. Before conducting the performance test, the permittee must install and calibrate all monitoring equipment.
- b. Each performance test must be conducted according to the requirements in §63.7 and under the specific conditions in Table 4 to this subpart.
- c. Performance tests shall be conducted under such conditions as the Administrator specifies based on representative performance of the affected source for the period being tested. Representative conditions exclude periods of startup and shutdown. The permittee may not conduct performance tests during periods of malfunction. The permittee must record the process information that is necessary to document operating conditions during the test and include in such record an explanation to support that such conditions represent normal operation. Upon request, the permittee shall make available to the Administrator such records as may be necessary to determine the conditions of performance tests.
- d. The permittee must conduct at least three separate test runs for each performance test required in this section, as specified in §63.7(e)(3). Each test run must last at least 1 hour.
- e. The permittee must use the data gathered during the performance test and the equations in 40 CFR §63.8445(f)(1) and (2) to determine compliance with the emission limitations.

**Table 4 to Subpart JJJJJ of Part 63 – Requirements for Performance Tests**

<b>For each . . .</b>	<b>You must . . .</b>	<b>Using . . .</b>	<b>According to the following requirements . . .</b>
1. Tunnel kiln	a. Select locations of	Method 1 or 1A of 40 CFR	Sampling sites must be

For each . . .	You must . . .	Using . . .	According to the following requirements . . .
	sampling ports and the number of traverse points	part 60, appendix A-1	located at the outlet of the APCD and prior to any releases to the atmosphere for all affected sources.
	b. Determine velocities and volumetric flow rate	Method 2 of 40 CFR part 60, appendix A-1	You may use Method 2A, 2C, 2D, or 2F of 40 CFR part 60, appendix A-1, or Method 2G of 40 CFR part 60, appendix A-2, as appropriate, as an alternative to using Method 2 of 40 CFR part 60, appendix A-1.
	c. Conduct gas molecular weight analysis	Method 3 of 40 CFR part 60, appendix A-2	You may use Method 3A or 3B of 40 CFR part 60, appendix A-2, as appropriate, as an alternative to using Method 3 of 40 CFR part 60, appendix A-2. ANSI/ASME PTC 19.10-1981 (incorporated by reference, see §63.14) may be used as an alternative to the manual procedures (but not the instrumental procedures) in Methods 3A and 3B.
	d. Measure moisture content of the stack gas	Method 4 of 40 CFR part 60, appendix A-3	
	e. Measure HF, HCl and Cl <sub>2</sub> emissions	i. Method 26A of 40 CFR part 60, appendix A-8; or	You may use Method 26 of 40 CFR part 60, appendix A-8, as an alternative to using Method 26A of 40 CFR part 60, appendix A-8, when no acid PM (e.g., HF or HCl dissolved in water droplets emitted by sources controlled by a WS) is present. ASTM D6735-01 (Reapproved 2009) (incorporated by reference, see §63.14) may be

For each . . .	You must . . .	Using . . .	According to the following requirements . . .
			used as an alternative to Methods 26 and 26A.
		ii. Method 320 of appendix A of this part	When using Method 320 of appendix A of this part, you must follow the analyte spiking procedures of section 13 of Method 320 of appendix A of this part, unless you can demonstrate that the complete spiking procedure has been conducted at a similar source. ASTM D6348-03 (Reapproved 2010) (incorporated by reference, see §63.14) may be used as an alternative to Method 320 if the test plan preparation and implementation in Annexes A1-A8 are mandatory and the %R in Annex A5 is determined for each target analyte.
	f. Measure PM emissions or non-Hg HAP metals	i. For PM only: Method 5 of 40 CFR part 60, appendix A-3; or	
		ii. For PM or non-Hg HAP metals: Method 29 of 40 CFR part 60, appendix A-8	
	g. Measure Hg emissions	Method 29 of 40 CFR part 60, appendix A-8	ASTM D6784-02 (Reapproved 2008) (incorporated by reference, see §63.14) may be used as an alternative to Method 29 (portion for Hg only).
2. Tunnel kiln with no add-on control	Establish the operating limit(s) for kiln process rate if the total facility	HCl-equivalent limit in Table 1 to this subpart and emissions and production data from the	Using the procedures in §63.8445(g)(1), you must determine the maximum process rate(s) for your

For each . . .	You must . . .	Using . . .	According to the following requirements . . .
	maximum potential HCl-equivalent emissions are greater than the HCl-equivalent limit in Table 1 to this subpart	HF/HCl/Cl <sub>2</sub> performance test	kiln(s) that would ensure total facility maximum potential HCl-equivalent emissions remain at or below the HCl-equivalent limit in Table 1 to this subpart. The maximum process rate(s) would become your site-specific process rate operating limit(s).
3. Tunnel kiln that is complying with PM and/or Hg production-based emission limits	Determine the production rate during each PM/Hg test run in order to determine compliance with PM and/or Hg production-based emission limits	Production data collected during the PM/Hg performance tests ( <i>e.g.</i> , no. of pushes per hour, no. of bricks per kiln car, weight of a typical fired brick)	You must measure and record the production rate, on a fired-product basis, of the affected source for each of the three test runs.

[Reg.19.304 and 40 C.F.R. § 63.8445(a-f), and 40 C.F.R. §63 Subpart JJJJ Table 4]

24. The permittee must conduct initial performance tests for SN-02 within 180 calendar days of the specified date of initial compliance for HF, HCl, Cl<sub>2</sub>, PM, and Hg emissions. [Reg.19.304 and 40 C.F.R. § 63.8435, and 40 C.F.R. § 63 Subpart JJJJ Table 5]
25. The permittee must conduct subsequent performance tests for SN-02 prior to the renewal of this permit or at least every 5 years following the initial performance test. [Reg.19.304 and 40 C.F.R. § 63.8440(a)]
26. The permittee must conduct a new performance test in order to establish changes to the operating limits in the OM&M plan. If the permittee is revising an operating limit parameter value, the following requirements must be met:
  - a. Submit a notification of performance test to the Administrator as specified in §63.7(b).
  - b. After completing the performance tests to demonstrate that compliance with the emission limits can be achieved at the revised operating limit parameter value, the permittee must submit the performance test results and the revised operating limits as part of the Notification of Compliance Status required under §63.9(h).

[Reg.19.304 and 40 C.F.R. § 63.8455(a), and 40 C.F.R. 63 Subpart JJJJ Table 5]

27. The permittee must demonstrate initial compliance with each applicable emission limitation and work practice standard according to Table 5 to this subpart. [Reg.19.304 and 40 C.F.R. § 63.8455(a), and 40 C.F.R. § 63 Subpart JJJJ Table 5]

**Table 5 to Subpart JJJJ of Part 63 – Initial Compliance with Emission Limitations and Work Practice Standards**

<b>For each . . .</b>	<b>For the following . . .</b>	<b>You have demonstrated initial compliance if . . .</b>
1. Collection of all tunnel kilns at the facility, including all process streams	a. HF, HCl, and Cl <sub>2</sub> emissions must not exceed 26 kg/hr (57 lb/hr) HCl equivalent	i. You measure HF, HCl, and Cl <sub>2</sub> emissions for each kiln using Method 26 or 26A of 40 CFR part 60, appendix A-8 or its alternative, ASTM D6735-01 (Reapproved 2009) (incorporated by reference, see §63.14); or Method 320 of appendix A of this part or its alternative, ASTM D6348-03 (Reapproved 2010) (incorporated by reference, see §63.14); and
		ii. You calculate the HCl-equivalent emissions for each kiln using Equation 2 to this subpart; and
		iii. You sum the HCl-equivalent values for all kilns at the facility using Equation 3 to this subpart; and
		iv. The facility total HCl-equivalent does not exceed 26 kg/hr (57 lb/hr).
3. Existing small tunnel kiln (design capacity <10 tph of fired product), including all process streams	a. PM emissions must not exceed 0.19 kg/Mg (0.37 lb/ton) of fired product or 4.8 mg/dscm (0.0021 gr/dscf) at 17% O <sub>2</sub> ; or	i. The PM emissions measured using Method 5 of 40 CFR part 60, appendix A-3 or Method 29 of 40 CFR part 60, appendix A-8, over the period of the initial performance test, according to the calculations in §63.8445(f)(1), do not exceed 0.19 kg/Mg (0.37 lb/ton) of fired product or 4.8 mg/dscm (0.0021 gr/dscf) at 17% O <sub>2</sub> ; and
		ii. You establish and have a record of the applicable operating limits listed in Table 2 to this subpart over the 3-hour performance test during which PM emissions did not exceed 0.19 kg/Mg (0.37 lb/ton) of fired product or 4.8 mg/dscm (0.0021 gr/dscf) at 17% O <sub>2</sub> .



For each . . .	For the following . . .	You have demonstrated initial compliance if . . .
	b. Non-Hg HAP metals emissions must not exceed 0.047 kg/hr (0.11 lb/hr)	i. The non-Hg HAP metals emissions measured using Method 29 of 40 CFR part 60, appendix A-8, over the period of the initial performance test, do not exceed 0.047 kg/hr (0.11 lb/hr); and
		ii. You establish and have a record of the applicable operating limits listed in Table 2 to this subpart over the 3-hour performance test during which non-Hg HAP metals emissions did not exceed 0.047 kg/hr (0.11 lb/hr).
	c. Hg emissions must not exceed 1.7 E-04 kg/Mg (3.3 E-04 lb/ton) of fired product or 91 µg/dscm at 17% O <sub>2</sub> or 8.5 E-04 kg/hr (0.0019 lb/hr)	i. The Hg emissions measured using Method 29 of 40 CFR part 60, appendix A-8 or its alternative, ASTM D6784-02 (Reapproved 2008) (incorporated by reference, see §63.14), over the period of the initial performance test, do not exceed 1.7 E-04 kg/Mg (3.3 E-04 lb/ton) of fired product or 91 µg/dscm at 17% O <sub>2</sub> or 8.5 E-04 kg/hr (0.0019 lb/hr); and
		ii. You establish and have a record of the applicable operating limits listed in Table 2 to this subpart over the 3-hour performance test during which Hg emissions did not exceed 1.7 E-04 kg/Mg (3.3 E-04 lb/ton) of fired product or 91 µg/dscm at 17% O <sub>2</sub> or 8.5 E-04 kg/hr (0.0019 lb/hr).
7. Existing, new or reconstructed tunnel kiln	a. Minimize dioxin/furan emissions	i. Conduct initial inspection of the burners and associated combustion controls (as applicable); and
		ii. Tune the specific burner type to optimize combustion.

28. The permittee must demonstrate continuous compliance with each applicable emission limit, operating limit, and work practice standard in Tables 1, 2, and 3 to this subpart according to the methods specified in Table 6 to this subpart:
- a. The permittee must report each instance in which each applicable emission limit and operating limit in this subpart was not met. These instances are deviations from the emission limitations in this subpart. These deviations must be reported according to the requirements in Specific Condition #32.
  - b. Alternative to VE testing. The permittee may conduct a PM test at least once every year following the initial performance test, according to the procedures of

Method 5 of 40 CFR part 60, appendix A-3, and the provisions of §63.8445(e) and (f)(1).

**Table 6 to Subpart JJJJJ of Part 63 – Continuous Compliance with Emission Limitations and Work Practice Standards**

<b>For each . . .</b>	<b>For the following . . .</b>	<b>You must demonstrate continuous compliance by . . .</b>
5. Tunnel kiln with no add-on control	a. Each emission limit in Table 1 to this subpart and each operating limit in Item 5 of Table 2 to this subpart for tunnel kilns with no add-on control	i. Performing VE observations of the stack at the frequency specified in §63.8470(e) using Method 22 of 40 CFR part 60, appendix A-7; and maintaining no VE from the stack.
		ii. If your last calculated total facility maximum potential HCl-equivalent was not at or below the health-based standard in Table 1 to this subpart, collecting the kiln process rate data according to §63.8450(a); reducing the kiln process rate data to 3-hour block averages according to §63.8450(a); maintaining the average kiln process rate for each 3-hour block period at or below the kiln process rate determined according to §63.8445(g)(1).
7. Tunnel kiln	a. Minimize dioxin/furan emissions	i. Maintaining and inspecting the burners and associated combustion controls (as applicable) and tuning the specific burner type to optimize combustion no later than 36 calendar months after the previous tune-up; and
		ii. Maintaining records of burner tune-ups used to demonstrate compliance with the dioxin/furan work practice standard; and
		iii. Submitting a report of most recent tune-up conducted with compliance report.

[Reg.19.304 and 40 C.F.R. § 63.8470, and 40 C.F.R. § 63 Subpart JJJJJ Table 6]

29. The permittee must submit all of the applicable notifications in §§63.7(b) and (c), 63.8(f)(4), and 63.9(b) through (e), (g)(1), and (h) by the dates specified, and all of the applicable notifications specified in Table 8 to this subpart, by the dates specified.  
 [Reg.19.304 and 40 C.F.R. § 63.8480(a-b), and 40 C.F.R. § 63 Subpart JJJJJ Table 8]

30. The permittee must submit the Notification of Compliance Status containing the results of the initial compliance demonstration according to the following requirements:
- a. If the permittee is required to conduct a performance test or other initial compliance demonstration as specified in Tables 4 and 5 to this subpart, the Notification of Compliance Status as specified in Table 8 to this subpart must include the following information:
    - i. The requirements in §63.9(h)(2)(i).
    - ii. The operating limit parameter values established for each affected source with supporting documentation and a description of the procedure used to establish the values.

<b>If you . . .</b>	<b>You must . . .</b>	<b>No later than . . .</b>	<b>As specified in . . .</b>
1. Start up your affected source before December 28, 2015	Submit an Initial Notification	June 22, 2016	§63.9(b)(2).
3. Are required to conduct a performance test	Submit a notification of intent to conduct a performance test	60 calendar days before the performance test is scheduled to begin	§63.7(b)(1).
4. Are required to conduct a compliance demonstration that includes a performance test according to the requirements in Table 4 to this subpart	Submit a Notification of Compliance Status, including the performance test results	60 calendar days following the completion of the performance test, by the close of business	§63.9(h) and §63.10(d)(2).
5. Are required to conduct a compliance demonstration required in Table 5 to this subpart that does not include a performance test ( <i>i.e.</i> , compliance demonstrations for the work practice standards)	Submit a Notification of Compliance Status	30 calendar days following the completion of the compliance demonstrations, by the close of business	§63.9(h).
6. Request to use the routine control device maintenance alternative standard according to §63.8420(d)	Submit your request	120 calendar days before the compliance date specified in §63.8395	

[Reg.19.304 and 40 C.F.R. § 63.8480(c), and 40 C.F.R. § 63 Subpart JJJJJ Table 8]

31. The permittee must submit each applicable report in Table 9 according to the following requirements:
- a. Unless the Administrator has approved a different schedule for submission of reports under §63.10(a), the permittee must submit each report by the date in Table 9 to this subpart and as specified in the following:

- i. The first compliance report must cover the period beginning on the compliance date that is specified for SN-02 in Specific Condition #9 and ending on either June 30 or December 31. The first reporting period must be at least 6 months, but less than 12 months. For example, if the compliance date is March 1, then the first semiannual reporting period would begin on March 1 and end on December 31.
- ii. The first compliance report must be postmarked or delivered no later than July 31 or January 31 for compliance periods ending on June 30 and December 31, respectively.
- iii. Each subsequent compliance report must cover the semiannual reporting period from January 1 through June 30 or the semiannual reporting period from July 1 through December 31.
- iv. Each subsequent compliance report must be postmarked or delivered no later than July 31 or January 31 for compliance periods ending on June 30 and December 31, respectively.
- v. For each affected source that is subject to permitting regulations pursuant to 40 CFR part 70 or 40 CFR part 71, if the permitting authority has established dates for submitting semiannual reports pursuant to 40 CFR 70.6(a)(3)(iii)(A) or 40 CFR 71.6(a)(3)(iii)(A), the permittee may submit the first and subsequent compliance reports according to the dates the permitting authority has established instead of the dates in paragraphs (b)(1) through (4) of this section.

**Table 9 to Subpart JJJJJ of Part 63 – Requirements for Reports**

<b>You must submit . . .</b>	<b>The report must contain . . .</b>	<b>You must submit the report . . .</b>
1. A compliance report.	a. If there are no deviations from any emission limitations (emission limits, operating limits) that apply to you, a statement that there were no deviations from the emission limitations during the reporting period. If there were no periods during which the CMS was out-of-control as specified in your OM&M plan, a statement that there were no periods during which the CMS was out-of-control during the reporting period	Semiannually according to the requirements in §63.8485(b).
	b. If you have a deviation from any emission limitation (emission limit, operating limit) during the reporting period, the report must contain the information in §63.8485(c)(9). If there were periods during which the CMS was out-of-control, as specified in your OM&M plan, the report must contain the information in §63.8485(d)	Semiannually according to the requirements in §63.8485(b).

32. The compliance report must contain the following information:

- a. Company name and address.
- b. Statement by a responsible official with that official's name, title, and signature, certifying that, based on information and belief formed after reasonable inquiry, the statements and information in the report are true, accurate, and complete.
- c. Date of report and beginning and ending dates of the reporting period.
- d. A report of the most recent burner tune-up conducted to comply with the dioxin/furan work practice standard in Table 3 to this subpart.
- e. If there are no deviations from any applicable emission limitations (emission limits or operating limits), the compliance report must contain a statement that there were no deviations from the emission limitations during the reporting period.
- f. The first compliance report must contain the startup push rate and the temperature profile for each kiln.
- g. For each deviation that occurs at an affected source, report such events in the compliance report by including the following information.
  - i. The date, time, and duration of the deviation.
  - ii. A list of the affected sources or equipment for which the deviation occurred.
  - iii. An estimate of the quantity of each regulated pollutant emitted over any emission limit, and a description of the method used to estimate the emissions.
- h. If the permittee has obtained a Title V operating permit according to 40 CFR part 70 or 40 CFR part 71, the permittee must report all deviations as defined in this subpart in the semiannual monitoring report required by 40 CFR 70.6(a)(3)(iii)(A) or 40 CFR 71.6(a)(3)(iii)(A). If the permittee submits a compliance report according to Table 9 to this subpart along with, or as part of, the semiannual monitoring report required by 40 CFR 70.6(a)(3)(iii)(A) or 40 CFR 71.6(a)(3)(iii)(A), and the compliance report includes all required information concerning deviations from any emission limitation (including any operating limit), then submitting the compliance report will satisfy any obligation to report the same deviations in the semiannual monitoring report. However, submitting a compliance report will not otherwise affect any obligation the permittee may have to report deviations from permit requirements to the permitting authority.

[Reg.19.304 and 40 C.F.R. § 63.8485(c, e)]

33. Within 60 calendar days after the date of completing each performance test (as defined in §63.2) required by this subpart, the permittee must submit the results of the performance test following the procedure specified in either paragraph (a) or (b) of this Specific Condition.
  - a. For data collected using test methods supported by the EPA's Electronic Reporting Tool (ERT) as listed on the EPA's ERT Web site (<http://www.epa.gov/ttn/chief/ert/index.html>) at the time of the test, the permittee must submit the results of the performance test to the EPA via the Compliance and Emissions Data Reporting Interface (CEDRI). (CEDRI can be accessed

through the EPA's Central Data Exchange (CDX) (<http://cdx.epa.gov/>.) Performance test data must be submitted in a file format generated through the use of the EPA's ERT or an alternate electronic file format consistent with the extensible markup language (XML) schema listed on the EPA's ERT Web site. If the permittee claims that some of the performance test information being submitted is confidential business information (CBI), the permittee must submit a complete file generated through the use of the EPA's ERT or an alternate electronic file consistent with the XML schema listed on the EPA's ERT Web site, including information claimed to be CBI, on a compact disc, flash drive, or other commonly used electronic storage media to the EPA. The electronic media must be clearly marked as CBI and mailed to U.S. EPA/OAPQS/CORE CBI Office, Attention: Group Leader, Measurement Policy Group, MD C404-02, 4930 Old Page Rd., Durham, NC 27703. The same ERT or alternate file with the CBI omitted must be submitted to the EPA via the EPA's CDX as described earlier in this paragraph.

- b. For data collected using test methods that are not supported by the EPA's ERT as listed on the EPA's ERT Web site at the time of the test, the permittee must submit the results of the performance test to the Administrator at the appropriate address listed in §63.13.

[Reg.19.304 and 40 C.F.R. § 63.8485(f)]

34. The permittee must keep the records listed:
  - a. A copy of each notification and report that the permittee submitted to comply with this subpart, including all documentation supporting any Initial Notification or Notification of Compliance Status that the permittee submitted, according to the requirements in 40 CFR §63.10(b)(2)(xiv).
  - b. Records of performance tests as required in 40 CFR §63.10(b)(2)(viii).
  - c. The permittee must keep the records required in Table 6 to this subpart to show continuous compliance with each applicable emission limitation and work practice standard.
  - d. For each deviation, record the following information:
    - i. The date, time, and duration of the deviation.
    - ii. A list of the affected sources or equipment.
    - iii. An estimate of the quantity of each regulated pollutant emitted over any emission limit and a description of the method used to estimate the emissions.
    - iv. Actions taken to minimize emissions in accordance with Specific Condition #11 and any corrective actions taken to return the affected unit to its normal or usual manner of operation.
    - v. For each affected source, records of production rates on a fired-product basis.
    - vi. Records for any approved alternative monitoring or test procedures.
  - e. Current copies of the OM&M plan, including any revisions, with records documenting conformance.

- f. Logs of the following information required to document proper operation of SN-02.
  - i. Records of burner tune-ups used to comply with the dioxin/furan work practice standard for tunnel kilns.
- g. For periods of startup and shutdown, records of the following information:
  - i. The date, time, and duration of each startup and/or shutdown period, recording the periods when the affected source was subject to the standard applicable to startup and shutdown.
  - ii. For periods of startup, the kiln push rate and kiln exhaust temperature prior to the time the kiln temperature profile is attained (for a kiln with no APCD).
  - iii. For periods of shutdown, the kiln push rate and kiln exhaust temperature after the time the kiln temperature profile is no longer maintained (for a kiln with no APCD).
- h. All site-specific parameters, temperature profiles, and procedures required to be established or developed according to the applicable work practice standards in Table 3 to this subpart.

[Reg.19.304 and 40 C.F.R. § 63.8490]

- 35. The permittee records must be in a form suitable and readily available for expeditious review. The permittee must keep each record for 5 years following the date of each recorded action. The permittee must keep each record on-site or be accessible from a central location by computer or other means that instantly provide access at the site for at least 2 years after the date of each recorded action. The permittee may keep the records off site for the remaining 3 years. [Reg.19.304 and 40 C.F.R. § 63.8495]

SN-03  
 Emergency Backup Generator

Source Description

SN-03 is a Cummins 4-stroke diesel engine powering an electric generator. The unit is used for emergency purposes only as defined in 40 CFR 63, Subpart ZZZZ.

Specific Conditions

36. The permittee shall not exceed the emission rates set forth in the following table. The permittee shall demonstrate compliance with this condition by Specific Condition 38. [Reg.19.501 *et seq.* and 40 C.F.R. § 52 Subpart E]

SN	Description	Pollutant	lb/hr	tpy
03	Emergency Backup Generator	PM <sub>10</sub>	0.2	0.1
		SO <sub>2</sub>	0.3	0.1
		VOC	0.5	0.2
		CO	3.9	1.0
		NO <sub>x</sub>	3.2	0.8

37. The permittee shall not exceed the emission rates set forth in the following table. The permittee shall demonstrate compliance with this condition by Specific Condition 38. [Reg.18.801 and Ark. Code Ann. § 8-4-203 as referenced by Ark. Code Ann. §§ 8-4-304 and 8-4-311]

SN	Description	Pollutant	lb/hr	tpy
03	Emergency Backup Generator	PM	0.2	0.1
		HAPs	0.01	0.01

38. The permittee shall not operate the emergency generator SN-03 in excess of 500 total hours (emergency and non-emergency) per rolling 12 month period in order to demonstrate compliance with the annual emission rate limits. Emergency operation in excess of these hours may be allowable but shall be reported and will be evaluated in accordance with Regulation 19 §19.602 and other applicable regulations. [Reg.19.705, Ark. Code Ann. § 8-4-203 as referenced by Ark. Code Ann. §§ 8-4-304 and 8-4-311, and 40 C.F.R. § 70.6]
39. The permittee shall maintain monthly records to demonstrate compliance with Specific Condition #38. The permittee shall update these records by the fifteenth day of the month following the month to which the records pertain. The twelve month rolling totals and each individual month's data shall be maintained on-site, made available to



Department personnel upon request, and submitted in accordance with General Provision #7. [Reg.19.705 and 40 C.F.R. § 52 Subpart E]

40. SN-03 is subject to the requirements of 40 CFR Part 63—National Emission Standards For Hazardous Air Pollutants For Source Categories, Subpart ZZZZ—National Emissions Standards for Hazardous Air Pollutants for Stationary Reciprocating Internal Combustion Engines. The source is subject to the requirements for Existing Stationary Engine  $\leq 500$  HP located at major sources of HAP, constructed before June 12, 2006, that include but are not limited to the conditions that follow. [Reg.19.304 and 40 C.F.R. § 63]
41. The permittee must for SN-03:
- a. Change oil and filter every 500 hours of operation or annually, whichever comes first.
  - b. Inspect air cleaner every 1,000 hours of operation or annually, whichever comes first, and replace as necessary;
  - c. Inspect all hoses and belts every 500 hours of operation or annually, whichever comes first, and replace as necessary.

[Reg.19.304 and 40 C.F.R. § 63 Table 2c]

42. The permittee must operate and maintain the stationary RICE and after-treatment control device (if any) according to the manufacturer's emission-related written instructions or develop your own maintenance plan which must provide to the extent practicable for the maintenance and operation of the engine in a manner consistent with good air pollution control practice for minimizing emissions. [Reg.19.304 and 40 C.F.R. § 63.6625(e)]
43. The permittee must install a non-resettable hour meter if one is not already installed. [Reg.19.304 and 40 C.F.R. § 63.6625(f)]
44. The permittee must minimize the engine's time spent at idle during startup and minimize the engine's startup time to a period needed for appropriate and safe loading of the engine, not to exceed 30 minutes, after which time the emission standards applicable to all times other than startup in Tables 2c to this subpart apply. [Reg.19.304 and 40 C.F.R. § 63.6625(h)]
45. If you own or operate a stationary CI engine that is subject to the work, operation or management practices in items 1 or 2 of Table 2c to this subpart or in items 1 or 4 of Table 2d to this subpart, you have the option of utilizing an oil analysis program in order to extend the specified oil change requirement in Tables 2c and 2d to this subpart. The oil analysis must be performed at the same frequency specified for changing the oil in Table 2c or 2d to this subpart. The analysis program must at a minimum analyze the following three parameters: Total Base Number, viscosity, and percent water content. The condemning limits for these parameters are as follows: Total Base Number is less than 30 percent of the Total Base Number of the oil when new; viscosity of the oil has changed by more than 20 percent from the viscosity of the oil when new; or percent water content

- (by volume) is greater than 0.5. If all of these condemning limits are not exceeded, the engine owner or operator is not required to change the oil. If any of the limits are exceeded, the engine owner or operator must change the oil within 2 days of receiving the results of the analysis; if the engine is not in operation when the results of the analysis are received, the engine owner or operator must change the oil within 2 days or before commencing operation, whichever is later. The owner or operator must keep records of the parameters that are analyzed as part of the program, the results of the analysis, and the oil changes for the engine. The analysis program must be part of the maintenance plan for the engine. [Reg.19.304 and 40 C.F.R. § 63.6625(i)]
46. The permittee must be in compliance with the emission limitations, operating limitations, and other requirements in this subpart that apply to you at all times. [Reg.19.304 and 40 C.F.R. § 63.6605(a)]
47. The permittee must operate and maintain any affected source, including associated air pollution control equipment and monitoring equipment, in a manner consistent with safety and good air pollution control practices for minimizing emissions. The general duty to minimize emissions does not require you to make any further efforts to reduce emissions if levels required by this standard have been achieved. Determination of whether such operation and maintenance procedures are being used will be based on information available to the Administrator which may include, but is not limited to, monitoring results, review of operation and maintenance procedures, review of operation and maintenance records, and inspection of the source. [Reg.19.304 and 40 C.F.R. § 63.6605(b)]
48. For SN-03 the permittee must: [Reg.19.304 and 40 C.F.R. § 63 Subpart ZZZZ Table 6]
- a. Work Management Practices
    - i. Operating and maintaining the stationary RICE according to the manufacturer's emission-related operation and maintenance instructions; or
    - ii. Develop and follow your own maintenance plan which must provide to the extent practicable for the maintenance and operation of the engine in a manner consistent with good air pollution control practice for minimizing emissions.
49. The permittee must report each instance in which you did not meet each emission limitation or operating limitation in Tables 1a and 1b, Tables 2a and 2b, Table 2c, and Table 2d to this subpart that apply to you. These instances are deviations from the emission and operating limitations in this subpart. These deviations must be reported according to the requirements in §63.6650. If you change your catalyst, you must reestablish the values of the operating parameters measured during the initial performance test. When you reestablish the values of your operating parameters, you must also conduct a performance test to demonstrate that you are meeting the required emission limitation applicable to your stationary RICE. [Reg.19.304 and 40 C.F.R. § 63.6640(b)]

50. If you own or operate an emergency stationary RICE, you must operate the emergency stationary RICE according to the requirements in paragraphs (f)(1) through (4) of this section. In order for the engine to be considered an emergency stationary RICE under this subpart, any operation other than emergency operation, maintenance and testing, emergency demand response, and operation in nonemergency situations for 50 hours per year, as described in paragraphs (f)(1) through (4) of this section, is prohibited. If you do not operate the engine according to the requirements in paragraphs (f)(1) through (4) of this section, the engine will not be considered an emergency engine under this subpart and must meet all requirements for non- emergency engines.
- a. There is no time limit on the use of emergency stationary RICE in emergency situations.
  - b. You may operate your emergency stationary RICE for any combination of the purposes specified in paragraphs (f)(2)(i) through (iii) of this section for a maximum of 100 hours per calendar year. Any operation for non-emergency situations as allowed by paragraphs (f)(3) and (4) of this section counts as part of the 100 hours per calendar year allowed by this paragraph (f)(2).
    - i. Emergency stationary RICE may be operated for maintenance checks and readiness testing, provided that the tests are recommended by federal, state or local government, the manufacturer, the vendor, the regional transmission organization or equivalent balancing authority and transmission operator, or the insurance company associated with the engine. The owner or operator may petition the Administrator for approval of additional hours to be used for maintenance checks and readiness testing, but a petition is not required if the owner or operator maintains records indicating that federal, state, or local standards require maintenance and testing of emergency RICE beyond 100 hours per calendar year.
  - c. Emergency stationary RICE located at major sources of HAP may be operated for up to 50 hours per calendar year in non-emergency situations. The 50 hours of operation in non- emergency situations are counted as part of the 100 hours per calendar year for maintenance and testing and emergency demand response provided in paragraph (f)(2) of this section. The 50 hours per year for non-emergency situations cannot be used for peak shaving or non-emergency demand response, or to generate income for a facility to supply power to an electric grid or otherwise supply power as part of a financial arrangement with another entity.

[Reg.19.304 and 40 C.F.R. § 63.6640(f)]

SN-04, Roller Mill and Associated Transfer Points

Source Description

The Roller Mill (SN-04) provides final sizing of raw materials prior to the pugmill. SN-04 is an existing emission unit with capacity greater than 10 tons per hour located at a major source of HAP emissions. SN-04 was constructed in 1985.

Specific Conditions

51. The permittee shall not exceed the emission rates set forth in the following table. The permittee shall demonstrate compliance with this condition by Specific Condition 53. [Reg.19.501 *et seq.* and 40 C.F.R. § 52 Subpart E]

SN	Description	Pollutant	lb/hr	Tpy
04	Roller Mill and Associated Transfer Points	PM <sub>10</sub>	0.1	0.1

52. The permittee shall not exceed the emission rates set forth in the following table. The permittee shall demonstrate compliance with this condition by Specific Condition 53. [Reg.18.801 and Ark. Code Ann. § 8-4-203 as referenced by Ark. Code Ann. §§ 8-4-304 and 8-4-311]

SN	Description	Pollutant	lb/hr	tpy
04	Roller Mill and Associated Transfer Points	PM	0.1	0.1

53. The maximum allowable production at the Roller Mill (SN-04) and Hammermill (SN-05) is 75,000 tpy of ground material during any consecutive twelve month period. [Reg.19.705, Ark. Code Ann. § 8-4-203 as referenced by Ark. Code Ann. §§ 8-4-304 and 8-4-311, and 40 C.F.R. § 70.6]
54. The permittee will maintain monthly records to demonstrate compliance with Specific Condition #53. The records should include a rolling 12-month total. The permittee will update the records by the fifteenth day of the month following the month to which the records pertain. The permittee will keep the records onsite, and make the records available to Department personnel upon request. The monthly reports shall also be submitted to the Department per General Provision 7 by the last day of the month after the reported six months. [Reg.19.705 and 40 C.F.R. § 52 Subpart E]
55. SN-04 is subject to and shall comply with all applicable provisions of 40 CFR 60, Subpart OOO—Standards of Performance for Nonmetallic Mineral Processing Plants.

The permittee shall comply with the applicable emission limitations, operating limitations, and other requirements. [Reg.19.304 and 40 C.F.R. § 60 Subpart OOO]

- 56. A notification of the actual dates of initial startup of SN-04 and SN-05 shall be submitted to the Department. [Reg.19.304 and 40 C.F.R. § 60.676(h)]
- 57. The permittee must meet the applicable fugitive emission limits. [Reg.19.304 and 40 C.F.R. § 60.672(b)]
- 58. Visible emissions may not exceed the limits specified in the following table of this permit as measured by EPA Reference Method 9 and the procedures in 40 C.F.R. § 60.11, with additions specified in Specific Condition #59.

SN	Limit	Regulatory citation
04 (Existing Facility)	7%	Reg.19.503, 40 C.F.R. § 52 Subpart E, and 40 C.F.R. § 60.672(e)(1)
04 (New Facility)	20%	Reg.19.503 and 40 C.F.R. § 52 Subpart E

- 59. In conducting the performance tests required in 40 CFR §60.8, the owner or operator shall use as reference methods and procedures the test methods in appendices A-1 through A-7 of 40 CFR 60 or other methods and procedures as specified, except as provided in §60.8(b). Acceptable alternative methods and procedures are given in Specific Condition #61.
  - a. The minimum distance between the observer and the emission source shall be 4.57 meters (15 feet).
  - b. The observer shall, when possible, select a position that minimizes interference from other fugitive emission sources (e.g., road dust). The required observer position relative to the sun must be followed.
  - c. For affected facilities using wet dust suppression for particulate matter control, a visible mist is sometimes generated by the spray. The water mist must not be confused with particulate matter emissions and is not to be considered a visible emission. When a water mist of this nature is present, the observation of emissions is to be made at a point in the plume where the mist is no longer visible.
  - d. When determining compliance with the fugitive emissions standard, the duration of the Method 9 observations must be 30 minutes (five 6-minute averages). Compliance with the applicable fugitive emission limits must be based on the average of the five 6-minute averages.

[Reg.19.304 and 40 C.F.R. § 60.675(a, c)]
- 60. To demonstrate compliance with the fugitive emission limits for buildings specified in Specific Condition #58, the owner or operator must complete the following testing specified. Performance tests must be conducted while all affected facilities inside the building are operating.

- a. If the building encloses only affected facilities that commenced construction, modification, or reconstruction before April 22, 2008, and the owner or operator has previously conducted an initial Method 22 (40 CFR 60, appendix A-7) performance test showing zero visible emissions, then the owner or operator has demonstrated compliance with the opacity limit in Specific Condition #58.
- b. If the owner or operator has not conducted an initial performance test for the building before April 22, 2008, then the owner or operator must conduct an initial Method 9 (40 CFR part 60, appendix A-4) performance test according to this section and §60.11 to show compliance with the opacity limit in Specific Condition #58.

[Reg.19.304 and 40 C.F.R. § 60.675(d)]

61. The permittee may use the following as alternatives to the reference methods and procedures specified in this section:
  - a. If emissions from two or more facilities continuously interfere so that the opacity of fugitive emissions from an individual affected facility cannot be read, either of the following procedures may be used:
    - i. Use for the combined emission stream the highest fugitive opacity standard applicable to any of the individual affected facilities contributing to the emissions stream.
    - ii. Separate the emissions so that the opacity of emissions from each affected facility can be read.
  - b. A single visible emission observer may conduct visible emission observations for up to three fugitive, stack, or vent emission points within a 15-second interval if the following conditions are met:
    - i. No more than three emission points may be read concurrently.
    - ii. All three emission points must be within a 70 degree viewing sector or angle in front of the observer such that the proper sun position can be maintained for all three points.
    - iii. If an opacity reading for any one of the three emission points equals or exceeds the applicable standard, then the observer must stop taking readings for the other two points and continue reading just that single point.

[Reg.19.304 and 40 C.F.R. § 60.675(e)]

62. For performance tests involving only Method 9 (40 CFR 60 appendix A-4) testing, the permittee may reduce the 30-day advance notification to the Department of performance test in 40 C.F.R. § 60.7(a)(6) and § 60.8(d) to a 7-day advance notification. [Reg.19.304 and 40 C.F.R. § 60.675(g)]
63. If the initial performance test date for SN-04 and SN-05 falls during a seasonal shut down (as defined in § 60.671 of this subpart) of the affected facility, then with approval from the permitting authority, the permittee may postpone the initial performance test until no

later than 60 calendar days after resuming operation of the affected facility. [Reg.19.304 and 40 C.F.R. § 60.675(i)]

64. The permittee shall submit to the Department written reports of the results of all performance tests conducted to demonstrate compliance with Specific Condition #58. [Reg.19.304 and 40 C.F.R. § 60.675(f)]
65. Upon reconstruction of SN-04, the permittee must account for the following:
- a. The cost of replacement of ore-contact surfaces on processing equipment shall not be considered in calculating either the “fixed capital cost of the new components” or the “fixed capital cost that would be required to construct a comparable new facility” under 40 CFR §60.15. Ore-contact surfaces are crushing surfaces; screen meshes, bars, and plates; conveyor belts; and elevator buckets.
  - b. Under 40 CFR §60.15, the “fixed capital cost of the new components” includes the fixed capital cost of all depreciable components (except components specified in paragraph (a) of this section) which are or will be replaced pursuant to all continuous programs of component replacement commenced within any 2-year period following August 31, 1983.

[Reg.19.304 and 40 C.F.R. § 60.673]

66. If the permittee replaces SN-04 with a piece of equipment of equal or smaller size, as defined in 40 CFR §60.671, having the same function as the existing facility, and there is no increase in the amount of emissions, the new facility is exempt from Specific Conditions #58 through #63 except as provided for in Specific Condition #67. [Reg.19.304 and 40 C.F.R. § 60.670(d)(1)]
67. An owner or operator replacing all existing facilities in a production line with new facilities does not qualify for the exemption described in Specific Condition #66 of this section and must comply with Specific Conditions #58 through #63. [Reg.19.304 and 40 C.F.R. § 60.670(d)(3)]
68. To demonstrate compliance with Specific Condition #66 the permittee shall submit to the Department the following information about the existing facility being replaced and the replacement equipment.
- a. For a crusher, grinding mill, bucket elevator, bagging operation, or enclosed truck or railcar loading station:
    - i. The rated capacity in megagrams or tons per hour of the existing facility being replaced and
    - ii. The rated capacity in tons per hour of the replacement equipment.
  - b. For a screening operation:
    - i. The total surface area of the top screen of the existing screening operation being replaced and
    - ii. The total surface area of the top screen of the replacement screening operation.

Acme Brick Company - Jonesboro Plant

Permit #: 2004-AOP-R4

AFIN: 16-00002

- c. For a conveyor belt:
  - i. The width of the existing belt being replaced and
  - ii. The width of the replacement conveyor belt.
- d. For a storage bin:
  - i. The rated capacity in megagrams or tons of the existing storage bin being replaced and
  - ii. The rated capacity in megagrams or tons of replacement storage bins.

[Reg.19.304 and 40 C.F.R. § 60.676(a)(1)]



Acme Brick Company - Jonesboro Plant  
Permit #: 2004-AOP-R4  
AFIN: 16-00002

## **SECTION V: COMPLIANCE PLAN AND SCHEDULE**

Acme Brick Company - Jonesboro Plant will continue to operate in compliance with those identified regulatory provisions. The facility will examine and analyze future regulations that may apply and determine their applicability with any necessary action taken on a timely basis.

## SECTION VI: PLANTWIDE CONDITIONS

1. The permittee shall notify the Director in writing within thirty (30) days after commencing construction, completing construction, first placing the equipment and/or facility in operation, and reaching the equipment and/or facility target production rate. [Reg.19.704, 40 C.F.R. § 52 Subpart E, and Ark. Code Ann. § 8-4-203 as referenced by Ark. Code Ann. §§ 8-4-304 and 8-4-311]
2. If the permittee fails to start construction within eighteen months or suspends construction for eighteen months or more, the Director may cancel all or part of this permit. [Reg.19.410(B) and 40 C.F.R. § 52 Subpart E]
3. The permittee must test any equipment scheduled for testing, unless otherwise stated in the Specific Conditions of this permit or by any federally regulated requirements, within the following time frames: (1) new equipment or newly modified equipment within sixty (60) days of achieving the maximum production rate, but no later than 180 days after initial start up of the permitted source or (2) operating equipment according to the time frames set forth by the Department or within 180 days of permit issuance if no date is specified. The permittee must notify the Department of the scheduled date of compliance testing at least fifteen (15) business days in advance of such test. The permittee shall submit the compliance test results to the Department within sixty (60) calendar days after completing the testing. [Reg.19.702 and/or Reg.18.1002 and Ark. Code Ann. § 8-4-203 as referenced by Ark. Code Ann. §§ 8-4-304 and 8-4-311]
4. The permittee must provide:
  - a. Sampling ports adequate for applicable test methods;
  - b. Safe sampling platforms;
  - c. Safe access to sampling platforms; and
  - d. Utilities for sampling and testing equipment.

[Reg.19.702 and/or Reg.18.1002 and Ark. Code Ann. § 8-4-203 as referenced by Ark. Code Ann. §§ 8-4-304 and 8-4-311]
5. The permittee must operate the equipment, control apparatus and emission monitoring equipment within the design limitations. The permittee shall maintain the equipment in good condition at all times. [Reg.19.303 and Ark. Code Ann. § 8-4-203 as referenced by Ark. Code Ann. §§ 8-4-304 and 8-4-311]
6. This permit subsumes and incorporates all previously issued air permits for this facility. [Reg. 26 and Ark. Code Ann. § 8-4-203 as referenced by Ark. Code Ann. §§ 8-4-304 and 8-4-311]

Acme Brick Company - Jonesboro Plant

Permit #: 2004-AOP-R4

AFIN: 16-00002

7. The permittee shall not exceed a throughput of 75,000 tons of fired ware at the facility per rolling 12 month period. [Reg.19.705, Ark. Code Ann. § 8-4-203 as referenced by Ark. Code Ann. §§ 8-4-304 and 8-4-311, and 40 C.F.R. § 70.6]
8. The permittee shall maintain monthly records to demonstrate compliance with Specific Condition #7. The permittee shall update these records by the fifteenth day of the month following the month to which the records pertain. The twelve month rolling totals and each individual month's data shall be maintained on-site, made available to Department personnel upon request, and submitted in accordance with General Provision #7. [Reg.19.705 and 40 C.F.R. § 52 Subpart E]
9. Compliance with the conditions of this permit shall be deemed compliance with all applicable requirements, as of the date of permit issuance, included in and specifically identified in the following table of this condition. The permit specifically identifies the following as applicable requirements based upon the information submitted by the permittee in an application dated February 25, 2008.

Applicable Regulations

<b>Source No.</b>	<b>Regulation</b>	<b>Description</b>
Facility	Arkansas Regulation19	Arkansas Air Pollution Control Code
Facility	Arkansas Regulation 26	Regulations of the Arkansas Operating Air Permit Program

**SECTION VII: INSIGNIFICANT ACTIVITIES**

The Department deems the following types of activities or emissions as insignificant on the basis of size, emission rate, production rate, or activity in accordance with Group A of the Insignificant Activities list found in Regulation 18 and Regulation 19 Appendix A. Group B insignificant activities may be listed but are not required to be listed in permits. Insignificant activity emission determinations rely upon the information submitted by the permittee in an application dated February 25, 2008, and May 11, 2018. [Reg.26.304 and Ark. Code Ann. § 8-4-203 as referenced by Ark. Code Ann. §§ 8-4-304 and 8-4-311]

Description	Category
IA-2, Bat Loss Drop	A-13
IA-4, Brick / Refractory Saw	A-13
IA-8, Additive Storage	A-13
IA-11, Holding Room Exhausts	A-13
Hammermill, Grinding Building	A-13
IA-13, Kiln Car Cleaner	A-13
IA-17, Plant Vacuum System	A-13
IA-18, Primary Crushing	A-13
Road Diesel Tank, 8500 Gallons, 0.0074 psi vapor pressure at STP	A-3
Off Road Diesel Tank, 8500 Gallons, 0.0074 psi vapor pressure at STP	A-3
Waste Oil, 500 Gallons, <0.01 psi vapor pressure at STP	A-3
Hydraulic Reservoir, 600 gallons, <0.01 psi vapor pressure at STP	A-3
Hydraulic Reservoir, 80 gallons, <0.01 psi vapor pressure at STP	A-3
Hydraulic Reservoir, 30 gallons, <0.01 psi vapor pressure at STP	A-3
Hydraulic Reservoir, 30 gallons, <0.01 psi vapor pressure at STP	A-3
Hydraulic Reservoir, 30 gallons, <0.01 psi vapor pressure at STP	A-3
Hydraulic Reservoir, 30 gallons, <0.01 psi vapor pressure at STP	A-3
Die Lube Reservoir, 250 gallons, <0.01 psi vapor pressure at STP	A-3
Vacuum Pump Reservoir, 210 gallons, <0.01 psi vapor pressure at STP	A-3
Motor Oil, 55 gallons, <0.01 psi vapor pressure at STP	A-3

Acme Brick Company - Jonesboro Plant

Permit #: 2004-AOP-R4

AFIN: 16-00002

Description	Category
Gear Oil, 55 gallons, <0.1 psi vapor pressure at STP	A-3
Transmission Oil, 55 gallons, <0.01 psi vapor pressure at STP	A-3
Antifreeze, 55 gallons, <0.01 psi vapor pressure at STP	A-3
Hydraulic Fluid, 55 gallons, <0.01 psi vapor pressure at STP	A-3
Lignosulfanate (Additive A) Tanks (3), 9500 gallons, <0.01 psi vapor pressure at STP	A-3

### SECTION VIII: GENERAL PROVISIONS

1. Any terms or conditions included in this permit which specify and reference Arkansas Pollution Control & Ecology Commission Regulation 18 or the Arkansas Water and Air Pollution Control Act (Ark. Code Ann. § 8-4-101 *et seq.*) as the sole origin of and authority for the terms or conditions are not required under the Clean Air Act or any of its applicable requirements, and are not federally enforceable under the Clean Air Act. Arkansas Pollution Control & Ecology Commission Regulation 18 was adopted pursuant to the Arkansas Water and Air Pollution Control Act (Ark. Code Ann. § 8-4-101 *et seq.*). Any terms or conditions included in this permit which specify and reference Arkansas Pollution Control & Ecology Commission Regulation 18 or the Arkansas Water and Air Pollution Control Act (Ark. Code Ann. § 8-4-101 *et seq.*) as the origin of and authority for the terms or conditions are enforceable under this Arkansas statute. [40 C.F.R. § 70.6(b)(2)]
2. This permit shall be valid for a period of five (5) years beginning on the date this permit becomes effective and ending five (5) years later. [40 C.F.R. § 70.6(a)(2) and Reg.26.701(B)]
3. The permittee must submit a complete application for permit renewal at least six (6) months before permit expiration. Permit expiration terminates the permittee's right to operate unless the permittee submitted a complete renewal application at least six (6) months before permit expiration. If the permittee submits a complete application, the existing permit will remain in effect until the Department takes final action on the renewal application. The Department will not necessarily notify the permittee when the permit renewal application is due. [Reg.26.406]
4. Where an applicable requirement of the Clean Air Act, as amended, 42 U.S.C. 7401, *et seq.* (Act) is more stringent than an applicable requirement of regulations promulgated under Title IV of the Act, the permit incorporates both provisions into the permit, and the Director or the Administrator can enforce both provisions. [40 C.F.R. § 70.6(a)(1)(ii) and Reg.26.701(A)(2)]
5. The permittee must maintain the following records of monitoring information as required by this permit.
  - a. The date, place as defined in this permit, and time of sampling or measurements;
  - b. The date(s) analyses performed;
  - c. The company or entity performing the analyses;
  - d. The analytical techniques or methods used;
  - e. The results of such analyses; and
  - f. The operating conditions existing at the time of sampling or measurement.

[40 C.F.R. § 70.6(a)(3)(ii)(A) and Reg.26.701(C)(2)]

6. The permittee must retain the records of all required monitoring data and support information for at least five (5) years from the date of the monitoring sample, measurement, report, or application. Support information includes all calibration and maintenance records and all original strip chart recordings for continuous monitoring instrumentation, and copies of all reports required by this permit. [40 C.F.R. § 70.6(a)(3)(ii)(B) and Reg.26.701(C)(2)(b)]
7. The permittee must submit reports of all required monitoring every six (6) months. If the permit establishes no other reporting period, the reporting period shall end on the last day of the month six months after the issuance of the initial Title V permit and every six months thereafter. The report is due on the first day of the second month after the end of the reporting period. The first report due after issuance of the initial Title V permit shall contain six months of data and each report thereafter shall contain 12 months of data. The report shall contain data for all monitoring requirements in effect during the reporting period. If a monitoring requirement is not in effect for the entire reporting period, only those months of data in which the monitoring requirement was in effect are required to be reported. The report must clearly identify all instances of deviations from permit requirements. A responsible official as defined in Reg.26.2 must certify all required reports. The permittee will send the reports to the address below:

Arkansas Department of Environmental Quality  
Office of Air Quality  
ATTN: Compliance Inspector Supervisor  
5301 Northshore Drive  
North Little Rock, AR 72118-5317

[40 C.F.R. § 70.6(a)(3)(iii)(A) and Reg.26.701(C)(3)(a)]

8. The permittee shall report to the Department all deviations from permit requirements, including those attributable to upset conditions as defined in the permit.
  - a. For all upset conditions (as defined in Reg.19.601), the permittee will make an initial report to the Department by the next business day after the discovery of the occurrence. The initial report may be made by telephone and shall include:
    - i. The facility name and location;
    - ii. The process unit or emission source deviating from the permit limit;
    - iii. The permit limit, including the identification of pollutants, from which deviation occurs;
    - iv. The date and time the deviation started;
    - v. The duration of the deviation;
    - vi. The emissions during the deviation;
    - vii. The probable cause of such deviations;
    - viii. Any corrective actions or preventive measures taken or being taken to prevent such deviations in the future; and

ix. The name of the person submitting the report.

The permittee shall make a full report in writing to the Department within five (5) business days of discovery of the occurrence. The report must include, in addition to the information required by the initial report, a schedule of actions taken or planned to eliminate future occurrences and/or to minimize the amount the permit's limits were exceeded and to reduce the length of time the limits were exceeded. The permittee may submit a full report in writing (by facsimile, overnight courier, or other means) by the next business day after discovery of the occurrence, and the report will serve as both the initial report and full report.

b. For all deviations, the permittee shall report such events in semi-annual reporting and annual certifications required in this permit. This includes all upset conditions reported in 8a above. The semi-annual report must include all the information as required by the initial and full reports required in 8a.

[Reg.19.601, Reg.19.602, Reg.26.701(C)(3)(b), and 40 C.F.R. § 70.6(a)(3)(iii)(B)]

9. If any provision of the permit or the application thereof to any person or circumstance is held invalid, such invalidity will not affect other provisions or applications hereof which can be given effect without the invalid provision or application, and to this end, provisions of this Regulation are declared to be separable and severable. [40 C.F.R. § 70.6(a)(5), Reg.26.701(E), and Ark. Code Ann. § 8-4-203 as referenced by Ark. Code Ann. §§ 8-4-304 and 8-4-311]
10. The permittee must comply with all conditions of this Part 70 permit. Any permit noncompliance with applicable requirements as defined in Regulation 26 constitutes a violation of the Clean Air Act, as amended, 42 U.S.C. § 7401, *et seq.* and is grounds for enforcement action; for permit termination, revocation and reissuance, for permit modification; or for denial of a permit renewal application. [40 C.F.R. § 70.6(a)(6)(i) and Reg.26.701(F)(1)]
11. It shall not be a defense for a permittee in an enforcement action that it would have been necessary to halt or reduce the permitted activity to maintain compliance with the conditions of this permit. [40 C.F.R. § 70.6(a)(6)(ii) and Reg.26.701(F)(2)]
12. The Department may modify, revoke, reopen and reissue the permit or terminate the permit for cause. The filing of a request by the permittee for a permit modification, revocation and reissuance, termination, or of a notification of planned changes or anticipated noncompliance does not stay any permit condition. [40 C.F.R. § 70.6(a)(6)(iii) and Reg.26.701(F)(3)]
13. This permit does not convey any property rights of any sort, or any exclusive privilege. [40 C.F.R. § 70.6(a)(6)(iv) and Reg.26.701(F)(4)]



14. The permittee must furnish to the Director, within the time specified by the Director, any information that the Director may request in writing to determine whether cause exists for modifying, revoking and reissuing, or terminating the permit or to determine compliance with the permit. Upon request, the permittee must also furnish to the Director copies of records required by the permit. For information the permittee claims confidentiality, the Department may require the permittee to furnish such records directly to the Director along with a claim of confidentiality. [40 C.F.R. § 70.6(a)(6)(v) and Reg.26.701(F)(5)]
15. The permittee must pay all permit fees in accordance with the procedures established in Regulation 9. [40 C.F.R. § 70.6(a)(7) and Reg.26.701(G)]
16. No permit revision shall be required, under any approved economic incentives, marketable permits, emissions trading and other similar programs or processes for changes provided for elsewhere in this permit. [40 C.F.R. § 70.6(a)(8) and Reg.26.701(H)]
17. If the permit allows different operating scenarios, the permittee shall, contemporaneously with making a change from one operating scenario to another, record in a log at the permitted facility a record of the operational scenario. [40 C.F.R. § 70.6(a)(9)(i) and Reg.26.701(I)(1)]
18. The Administrator and citizens may enforce under the Act all terms and conditions in this permit, including any provisions designed to limit a source's potential to emit, unless the Department specifically designates terms and conditions of the permit as being federally unenforceable under the Act or under any of its applicable requirements. [40 C.F.R. § 70.6(b) and Reg.26.702(A) and (B)]
19. Any document (including reports) required by this permit pursuant to 40 C.F.R. § 70 must contain a certification by a responsible official as defined in Reg.26.2. [40 C.F.R. § 70.6(c)(1) and Reg.26.703(A)]
20. The permittee must allow an authorized representative of the Department, upon presentation of credentials, to perform the following: [40 C.F.R. § 70.6(c)(2) and Reg.26.703(B)]
  - a. Enter upon the permittee's premises where the permitted source is located or emissions related activity is conducted, or where records must be kept under the conditions of this permit;
  - b. Have access to and copy, at reasonable times, any records required under the conditions of this permit;
  - c. Inspect at reasonable times any facilities, equipment (including monitoring and air pollution control equipment), practices, or operations regulated or required under this permit; and
  - d. As authorized by the Act, sample or monitor at reasonable times substances or parameters for assuring compliance with this permit or applicable requirements.

21. The permittee shall submit a compliance certification with the terms and conditions contained in the permit, including emission limitations, standards, or work practices. The permittee must submit the compliance certification annually. If the permit establishes no other reporting period, the reporting period shall end on the last day of the anniversary month of the initial Title V permit. The report is due on the first day of the second month after the end of the reporting period. The permittee must also submit the compliance certification to the Administrator as well as to the Department. All compliance certifications required by this permit must include the following: [40 C.F.R. § 70.6(c)(5) and Reg.26.703(E)(3)]
  - a. The identification of each term or condition of the permit that is the basis of the certification;
  - b. The compliance status;
  - c. Whether compliance was continuous or intermittent;
  - d. The method(s) used for determining the compliance status of the source, currently and over the reporting period established by the monitoring requirements of this permit; and
  - e. Such other facts as the Department may require elsewhere in this permit or by § 114(a)(3) and § 504(b) of the Act.
22. Nothing in this permit will alter or affect the following: [Reg.26.704(C)]
  - a. The provisions of Section 303 of the Act (emergency orders), including the authority of the Administrator under that section;
  - b. The liability of the permittee for any violation of applicable requirements prior to or at the time of permit issuance;
  - c. The applicable requirements of the acid rain program, consistent with § 408(a) of the Act; or
  - d. The ability of EPA to obtain information from a source pursuant to § 114 of the Act.
23. This permit authorizes only those pollutant emitting activities addressed in this permit. [Ark. Code Ann. § 8-4-203 as referenced by Ark. Code Ann. §§ 8-4-304 and 8-4-311]
24. The permittee may request in writing and at least 15 days in advance of the deadline, an extension to any testing, compliance or other dates in this permit. No such extensions are authorized until the permittee receives written Department approval. The Department may grant such a request, at its discretion in the following circumstances:
  - a. Such an extension does not violate a federal requirement;
  - b. The permittee demonstrates the need for the extension; and
  - c. The permittee documents that all reasonable measures have been taken to meet the current deadline and documents reasons it cannot be met.

[Reg.18.314(A), Reg.19.416(A), Reg.26.1013(A), Ark. Code Ann. § 8-4-203 as referenced by Ark. Code Ann. §§ 8-4-304 and 8-4-311, and 40 C.F.R. § 52 Subpart E]

25. The permittee may request in writing and at least 30 days in advance, temporary emissions and/or testing that would otherwise exceed an emission rate, throughput requirement, or other limit in this permit. No such activities are authorized until the permittee receives written Department approval. Any such emissions shall be included in the facility's total emissions and reported as such. The Department may grant such a request, at its discretion under the following conditions:
- a. Such a request does not violate a federal requirement;
  - b. Such a request is temporary in nature;
  - c. Such a request will not result in a condition of air pollution;
  - d. The request contains such information necessary for the Department to evaluate the request, including but not limited to, quantification of such emissions and the date/time such emission will occur;
  - e. Such a request will result in increased emissions less than five tons of any individual criteria pollutant, one ton of any single HAP and 2.5 tons of total HAPs; and
  - f. The permittee maintains records of the dates and results of such temporary emissions/testing.

[Reg.18.314(B), Reg.19.416(B), Reg.26.1013(B), Ark. Code Ann. § 8-4-203 as referenced by Ark. Code Ann. §§ 8-4-304 and 8-4-311, and 40 C.F.R. § 52 Subpart E]

26. The permittee may request in writing and at least 30 days in advance, an alternative to the specified monitoring in this permit. No such alternatives are authorized until the permittee receives written Department approval. The Department may grant such a request, at its discretion under the following conditions:
- a. The request does not violate a federal requirement;
  - b. The request provides an equivalent or greater degree of actual monitoring to the current requirements; and
  - c. Any such request, if approved, is incorporated in the next permit modification application by the permittee.

[Reg.18.314(C), Reg.19.416(C), Reg.26.1013(C), Ark. Code Ann. § 8-4-203 as referenced by Ark. Code Ann. §§ 8-4-304 and 8-4-311, and 40 C.F.R. § 52 Subpart E]

27. Any credible evidence based on sampling, monitoring, and reporting may be used to determine violations of applicable emission limitations. [Reg.18.1001, Reg.19.701, Ark. Code Ann. § 8-4-203 as referenced by Ark. Code Ann. §§ 8-4-304 and 8-4-311, and 40 C.F.R. § 52 Subpart E]

# **APPENDIX A**

## Electronic Code of Federal Regulations

e-CFR data is current as of September 13, 2018

[Title 40](#) → [Chapter I](#) → [Subchapter C](#) → [Part 60](#) → Subpart OOO

---

[Browse Previous](#) | [Browse Next](#)

Title 40: Protection of Environment

[PART 60—STANDARDS OF PERFORMANCE FOR NEW STATIONARY SOURCES \(CONTINUED\)](#)

---

### Subpart OOO—Standards of Performance for Nonmetallic Mineral Processing Plants

---

#### Contents

[§60.670 Applicability and designation of affected facility.](#)

[§60.671 Definitions.](#)

[§60.672 Standard for particulate matter \(PM\).](#)

[§60.673 Reconstruction.](#)

[§60.674 Monitoring of operations.](#)

[§60.675 Test methods and procedures.](#)

[§60.676 Reporting and recordkeeping.](#)

[Table 1 to Subpart OOO of Part 60—Exceptions to Applicability of Subpart A to Subpart OOO](#)

[Table 2 to Subpart OOO of Part 60—Stack Emission Limits for Affected Facilities With Capture Systems](#)

[Table 3 to Subpart OOO of Part 60—Fugitive Emission Limits](#)

---

Source: 74 FR 19309, Apr. 28, 2009, unless otherwise noted.

[↑ Back to Top](#)

#### **§60.670 Applicability and designation of affected facility.**

(a)(1) Except as provided in paragraphs (a)(2), (b), (c), and (d) of this section, the provisions of this subpart are applicable to the following affected facilities in fixed or portable nonmetallic mineral processing plants: each crusher, grinding mill, screening operation, bucket elevator, belt conveyor, bagging operation, storage bin, enclosed truck or railcar loading station. Also, crushers and grinding mills at hot mix asphalt facilities that reduce the size of nonmetallic minerals embedded in recycled asphalt pavement and subsequent affected facilities up to, but not including, the first storage silo or bin are subject to the provisions of this subpart.

(2) The provisions of this subpart do not apply to the following operations: All facilities located in underground mines; plants without crushers or grinding mills above ground; and wet material processing operations (as defined in §60.671).

(b) An affected facility that is subject to the provisions of subparts F or I of this part or that follows in the plant process any facility subject to the provisions of subparts F or I of this part is not subject to the provisions of this subpart.

(c) Facilities at the following plants are not subject to the provisions of this subpart:

(1) Fixed sand and gravel plants and crushed stone plants with capacities, as defined in §60.671, of 23 megagrams per hour (25 tons per hour) or less;

(2) Portable sand and gravel plants and crushed stone plants with capacities, as defined in §60.671, of 136 megagrams per hour (150 tons per hour) or less; and

(3) Common clay plants and pumice plants with capacities, as defined in §60.671, of 9 megagrams per hour (10 tons per hour) or less.

(d)(1) When an existing facility is replaced by a piece of equipment of equal or smaller size, as defined in §60.671, having the same function as the existing facility, and there is no increase in the amount of emissions, the new facility is exempt from the provisions of §§60.672, 60.674, and 60.675 except as provided for in paragraph (d)(3) of this section.

(2) An owner or operator complying with paragraph (d)(1) of this section shall submit the information required in §60.676(a).

(3) An owner or operator replacing all existing facilities in a production line with new facilities does not qualify for the exemption described in paragraph (d)(1) of this section and must comply with the provisions of §§60.672, 60.674 and 60.675.

(e) An affected facility under paragraph (a) of this section that commences construction, modification, or reconstruction after August 31, 1983, is subject to the requirements of this part.

(f) Table 1 of this subpart specifies the provisions of subpart A of this part 60 that do not apply to owners and operators of affected facilities subject to this subpart or that apply with certain exceptions.

[↑ Back to Top](#)

### **§60.671 Definitions.**

All terms used in this subpart, but not specifically defined in this section, shall have the meaning given them in the Act and in subpart A of this part.

*Bagging operation* means the mechanical process by which bags are filled with nonmetallic minerals.

*Belt conveyor* means a conveying device that transports material from one location to another by means of an endless belt that is carried on a series of idlers and routed around a pulley at each end.

*Bucket elevator* means a conveying device of nonmetallic minerals consisting of a head and foot assembly which supports and drives an endless single or double strand chain or belt to which buckets are attached.

*Building* means any frame structure with a roof.

*Capacity* means the cumulative rated capacity of all initial crushers that are part of the plant.

*Capture system* means the equipment (including enclosures, hoods, ducts, fans, dampers, etc.) used to capture and transport particulate matter generated by one or more affected facilities to a control device.

*Control device* means the air pollution control equipment used to reduce particulate matter emissions released to the atmosphere from one or more affected facilities at a nonmetallic mineral processing plant.

*Conveying system* means a device for transporting materials from one piece of equipment or location to another location within a plant. Conveying systems include but are not limited to the following: Feeders, belt conveyors, bucket elevators and pneumatic systems.

*Crush or Crushing* means to reduce the size of nonmetallic mineral material by means of physical impaction of the crusher or grinding mill upon the material.

*Crusher* means a machine used to crush any nonmetallic minerals, and includes, but is not limited to, the following types: Jaw, gyratory, cone, roll, rod mill, hammermill, and impactor.

*Enclosed truck or railcar loading station* means that portion of a nonmetallic mineral processing plant where nonmetallic minerals are loaded by an enclosed conveying system into enclosed trucks or railcars.

*Fixed plant* means any nonmetallic mineral processing plant at which the processing equipment specified in §60.670(a) is attached by a cable, chain, turnbuckle, bolt or other means (except electrical connections) to any anchor, slab, or structure including bedrock.

*Fugitive emission* means particulate matter that is not collected by a capture system and is released to the atmosphere at the point of generation.

*Grinding mill* means a machine used for the wet or dry fine crushing of any nonmetallic mineral. Grinding mills include, but are not limited to, the following types: Hammer, roller, rod, pebble and ball, and fluid energy. The grinding mill includes the air conveying system, air separator, or air classifier, where such systems are used.

*Initial crusher* means any crusher into which nonmetallic minerals can be fed without prior crushing in the plant.

*Nonmetallic mineral* means any of the following minerals or any mixture of which the majority is any of the following minerals:

- (1) Crushed and Broken Stone, including Limestone, Dolomite, Granite, Traprock, Sandstone, Quartz, Quartzite, Marl, Marble, Slate, Shale, Oil Shale, and Shell.
- (2) Sand and Gravel.
- (3) Clay including Kaolin, Fireclay, Bentonite, Fuller's Earth, Ball Clay, and Common Clay.
- (4) Rock Salt.
- (5) Gypsum (natural or synthetic).
- (6) Sodium Compounds, including Sodium Carbonate, Sodium Chloride, and Sodium Sulfate.
- (7) Pumice.
- (8) Gilsonite.
- (9) Talc and Pyrophyllite.

(10) Boron, including Borax, Kernite, and Colemanite.

(11) Barite.

(12) Fluorospars.

(13) Feldspar.

(14) Diatomite.

(15) Perlite.

(16) Vermiculite.

(17) Mica.

(18) Kyanite, including Andalusite, Sillimanite, Topaz, and Dumortierite.

*Nonmetallic mineral processing plant* means any combination of equipment that is used to crush or grind any nonmetallic mineral wherever located, including lime plants, power plants, steel mills, asphalt concrete plants, portland cement plants, or any other facility processing nonmetallic minerals except as provided in §60.670 (b) and (c).

*Portable plant* means any nonmetallic mineral processing plant that is mounted on any chassis or skids and may be moved by the application of a lifting or pulling force. In addition, there shall be no cable, chain, turnbuckle, bolt or other means (except electrical connections) by which any piece of equipment is attached or clamped to any anchor, slab, or structure, including bedrock that must be removed prior to the application of a lifting or pulling force for the purpose of transporting the unit.

*Production line* means all affected facilities (crushers, grinding mills, screening operations, bucket elevators, belt conveyors, bagging operations, storage bins, and enclosed truck and railcar loading stations) which are directly connected or are connected together by a conveying system.

*Saturated material* means, for purposes of this subpart, mineral material with sufficient surface moisture such that particulate matter emissions are not generated from processing of the material through screening operations, bucket elevators and belt conveyors. Material that is wetted solely by wet suppression systems is not considered to be "saturated" for purposes of this definition.

*Screening operation* means a device for separating material according to size by passing undersize material through one or more mesh surfaces (screens) in series, and retaining oversize material on the mesh surfaces (screens). Grizzly feeders associated with truck dumping and static (non-moving) grizzlies used anywhere in the nonmetallic mineral processing plant are not considered to be screening operations.

*Seasonal shut down* means shut down of an affected facility for a period of at least 45 consecutive days due to weather or seasonal market conditions.

*Size* means the rated capacity in tons per hour of a crusher, grinding mill, bucket elevator, bagging operation, or enclosed truck or railcar loading station; the total surface area of the top screen of a screening operation; the width of a conveyor belt; and the rated capacity in tons of a storage bin.

*Stack emission* means the particulate matter that is released to the atmosphere from a capture system.



*Storage bin* means a facility for storage (including surge bins) of nonmetallic minerals prior to further processing or loading.

*Transfer point* means a point in a conveying operation where the nonmetallic mineral is transferred to or from a belt conveyor except where the nonmetallic mineral is being transferred to a stockpile.

*Truck dumping* means the unloading of nonmetallic minerals from movable vehicles designed to transport nonmetallic minerals from one location to another. Movable vehicles include but are not limited to: Trucks, front end loaders, skip hoists, and railcars.

*Vent* means an opening through which there is mechanically induced air flow for the purpose of exhausting from a building air carrying particulate matter emissions from one or more affected facilities.

*Wet material processing operation(s)* means any of the following:

- (1) Wet screening operations (as defined in this section) and subsequent screening operations, bucket elevators and belt conveyors in the production line that process saturated materials (as defined in this section) up to the first crusher, grinding mill or storage bin in the production line; or
- (2) Screening operations, bucket elevators and belt conveyors in the production line downstream of wet mining operations (as defined in this section) that process saturated materials (as defined in this section) up to the first crusher, grinding mill or storage bin in the production line.

*Wet mining operation* means a mining or dredging operation designed and operated to extract any nonmetallic mineral regulated under this subpart from deposits existing at or below the water table, where the nonmetallic mineral is saturated with water.

*Wet screening operation* means a screening operation at a nonmetallic mineral processing plant which removes unwanted material or which separates marketable fines from the product by a washing process which is designed and operated at all times such that the product is saturated with water.

[↑ Back to Top](#)

#### **§60.672 Standard for particulate matter (PM).**

- (a) Affected facilities must meet the stack emission limits and compliance requirements in Table 2 of this subpart within 60 days after achieving the maximum production rate at which the affected facility will be operated, but not later than 180 days after initial startup as required under §60.8. The requirements in Table 2 of this subpart apply for affected facilities with capture systems used to capture and transport particulate matter to a control device.
- (b) Affected facilities must meet the fugitive emission limits and compliance requirements in Table 3 of this subpart within 60 days after achieving the maximum production rate at which the affected facility will be operated, but not later than 180 days after initial startup as required under §60.11. The requirements in Table 3 of this subpart apply for fugitive emissions from affected facilities without capture systems and for fugitive emissions escaping capture systems.
- (c) [Reserved]
- (d) Truck dumping of nonmetallic minerals into any screening operation, feed hopper, or crusher is exempt from the requirements of this section.

(e) If any transfer point on a conveyor belt or any other affected facility is enclosed in a building, then each enclosed affected facility must comply with the emission limits in paragraphs (a) and (b) of this section, or the building enclosing the affected facility or facilities must comply with the following emission limits:

(1) Fugitive emissions from the building openings (except for vents as defined in §60.671) must not exceed 7 percent opacity; and

(2) Vents (as defined in §60.671) in the building must meet the applicable stack emission limits and compliance requirements in Table 2 of this subpart.

(f) Any baghouse that controls emissions from only an individual, enclosed storage bin is exempt from the applicable stack PM concentration limit (and associated performance testing) in Table 2 of this subpart but must meet the applicable stack opacity limit and compliance requirements in Table 2 of this subpart. This exemption from the stack PM concentration limit does not apply for multiple storage bins with combined stack emissions.

[↑ Back to Top](#)

### **§60.673 Reconstruction.**

(a) The cost of replacement of ore-contact surfaces on processing equipment shall not be considered in calculating either the “fixed capital cost of the new components” or the “fixed capital cost that would be required to construct a comparable new facility” under §60.15. Ore-contact surfaces are crushing surfaces; screen meshes, bars, and plates; conveyor belts; and elevator buckets.

(b) Under §60.15, the “fixed capital cost of the new components” includes the fixed capital cost of all depreciable components (except components specified in paragraph (a) of this section) which are or will be replaced pursuant to all continuous programs of component replacement commenced within any 2-year period following August 31, 1983.

[↑ Back to Top](#)

### **§60.674 Monitoring of operations.**

(a) The owner or operator of any affected facility subject to the provisions of this subpart which uses a wet scrubber to control emissions shall install, calibrate, maintain and operate the following monitoring devices:

(1) A device for the continuous measurement of the pressure loss of the gas stream through the scrubber. The monitoring device must be certified by the manufacturer to be accurate within  $\pm 250$  pascals  $\pm 1$  inch water gauge pressure and must be calibrated on an annual basis in accordance with manufacturer's instructions.

(2) A device for the continuous measurement of the scrubbing liquid flow rate to the wet scrubber. The monitoring device must be certified by the manufacturer to be accurate within  $\pm 5$  percent of design scrubbing liquid flow rate and must be calibrated on an annual basis in accordance with manufacturer's instructions.

(b) The owner or operator of any affected facility for which construction, modification, or reconstruction commenced on or after April 22, 2008, that uses wet suppression to control emissions from the affected facility must perform monthly periodic inspections to check that water is flowing to discharge spray nozzles in the wet suppression system. The owner or operator must initiate corrective action within 24 hours and complete corrective action as expeditiously as practical if the owner or operator finds that water is not flowing properly during an inspection of the water spray nozzles. The owner or operator must record each inspection of the water spray nozzles, including the date of each inspection and any corrective actions taken, in the logbook required under §60.676(b).

(1) If an affected facility relies on water carryover from upstream water sprays to control fugitive emissions, then that affected facility is exempt from the 5-year repeat testing requirement specified in Table 3 of this subpart provided that the affected facility meets the criteria in paragraphs (b)(1)(i) and (ii) of this section:

(i) The owner or operator of the affected facility conducts periodic inspections of the upstream water spray(s) that are responsible for controlling fugitive emissions from the affected facility. These inspections are conducted according to paragraph (b) of this section and §60.676(b), and

(ii) The owner or operator of the affected facility designates which upstream water spray(s) will be periodically inspected at the time of the initial performance test required under §60.11 of this part and §60.675 of this subpart.

(2) If an affected facility that routinely uses wet suppression water sprays ceases operation of the water sprays or is using a control mechanism to reduce fugitive emissions other than water sprays during the monthly inspection (for example, water from recent rainfall), the logbook entry required under §60.676(b) must specify the control mechanism being used instead of the water sprays.

(c) Except as specified in paragraph (d) or (e) of this section, the owner or operator of any affected facility for which construction, modification, or reconstruction commenced on or after April 22, 2008, that uses a baghouse to control emissions must conduct quarterly 30-minute visible emissions inspections using EPA Method 22 (40 CFR part 60, appendix A-7). The Method 22 (40 CFR part 60, appendix A-7) test shall be conducted while the baghouse is operating. The test is successful if no visible emissions are observed. If any visible emissions are observed, the owner or operator of the affected facility must initiate corrective action within 24 hours to return the baghouse to normal operation. The owner or operator must record each Method 22 (40 CFR part 60, appendix A-7) test, including the date and any corrective actions taken, in the logbook required under §60.676(b). The owner or operator of the affected facility may establish a different baghouse-specific success level for the visible emissions test (other than no visible emissions) by conducting a PM performance test according to §60.675(b) simultaneously with a Method 22 (40 CFR part 60, appendix A-7) to determine what constitutes normal visible emissions from that affected facility's baghouse when it is in compliance with the applicable PM concentration limit in Table 2 of this subpart. The revised visible emissions success level must be incorporated into the permit for the affected facility.

(d) As an alternative to the periodic Method 22 (40 CFR part 60, appendix A-7) visible emissions inspections specified in paragraph (c) of this section, the owner or operator of any affected facility for which construction, modification, or reconstruction commenced on or after April 22, 2008, that uses a baghouse to control emissions may use a bag leak detection system. The owner or operator must install, operate, and maintain the bag leak detection system according to paragraphs (d)(1) through (3) of this section.

(1) Each bag leak detection system must meet the specifications and requirements in paragraphs (d)(1)(i) through (viii) of this section.

(i) The bag leak detection system must be certified by the manufacturer to be capable of detecting PM emissions at concentrations of 1 milligram per dry standard cubic meter (0.00044 grains per actual cubic foot) or less.

(ii) The bag leak detection system sensor must provide output of relative PM loadings. The owner or operator shall continuously record the output from the bag leak detection system using electronic or other means (*e.g.*, using a strip chart recorder or a data logger).

(iii) The bag leak detection system must be equipped with an alarm system that will sound when the system detects an increase in relative particulate loading over the alarm set point established according to paragraph (d)(1)(iv) of this section, and the alarm must be located such that it can be heard by the appropriate plant personnel.

(iv) In the initial adjustment of the bag leak detection system, the owner or operator must establish, at a minimum, the baseline output by adjusting the sensitivity (range) and the averaging period of the device, the alarm set points, and the alarm delay time.

(v) Following initial adjustment, the owner or operator shall not adjust the averaging period, alarm set point, or alarm delay time without approval from the Administrator or delegated authority except as provided in paragraph (d)(1)(vi) of this section.

(vi) Once per quarter, the owner or operator may adjust the sensitivity of the bag leak detection system to account for seasonal effects, including temperature and humidity, according to the procedures identified in the site-specific monitoring plan required by paragraph (d)(2) of this section.

(vii) The owner or operator must install the bag leak detection sensor downstream of the fabric filter.

(viii) Where multiple detectors are required, the system's instrumentation and alarm may be shared among detectors.

(2) The owner or operator of the affected facility must develop and submit to the Administrator or delegated authority for approval of a site-specific monitoring plan for each bag leak detection system. The owner or operator must operate and maintain the bag leak detection system according to the site-specific monitoring plan at all times. Each monitoring plan must describe the items in paragraphs (d)(2)(i) through (vi) of this section.

(i) Installation of the bag leak detection system;

(ii) Initial and periodic adjustment of the bag leak detection system, including how the alarm set-point will be established;

(iii) Operation of the bag leak detection system, including quality assurance procedures;

(iv) How the bag leak detection system will be maintained, including a routine maintenance schedule and spare parts inventory list;

(v) How the bag leak detection system output will be recorded and stored; and

(vi) Corrective action procedures as specified in paragraph (d)(3) of this section. In approving the site-specific monitoring plan, the Administrator or delegated authority may allow owners and operators more than 3 hours to alleviate a specific condition that causes an alarm if the owner or operator identifies in the monitoring plan this specific condition as one that could lead to an alarm, adequately explains why it is not feasible to alleviate this condition within 3 hours of the time the alarm occurs, and demonstrates that the requested time will ensure alleviation of this condition as expeditiously as practicable.

(3) For each bag leak detection system, the owner or operator must initiate procedures to determine the cause of every alarm within 1 hour of the alarm. Except as provided in paragraph (d)(2)(vi) of this section, the owner or operator must alleviate the cause of the alarm within 3 hours of the alarm by taking whatever corrective action(s) are necessary. Corrective actions may include, but are not limited to the following:

(i) Inspecting the fabric filter for air leaks, torn or broken bags or filter media, or any other condition that may cause an increase in PM emissions;

(ii) Sealing off defective bags or filter media;

(iii) Replacing defective bags or filter media or otherwise repairing the control device;

(iv) Sealing off a defective fabric filter compartment;

(v) Cleaning the bag leak detection system probe or otherwise repairing the bag leak detection system; or

(vi) Shutting down the process producing the PM emissions.

(e) As an alternative to the periodic Method 22 (40 CFR part 60, appendix A-7) visible emissions inspections specified in paragraph (c) of this section, the owner or operator of any affected facility that is subject to the requirements for processed stone handling operations in the Lime Manufacturing NESHAP (40 CFR part 63, subpart AAAAA) may follow the continuous compliance requirements in row 1 items (i) through (iii) of table 6 to subpart AAAAA of 40 CFR part 63.

[↑ Back to Top](#)

#### **§60.675 Test methods and procedures.**

(a) In conducting the performance tests required in §60.8, the owner or operator shall use as reference methods and procedures the test methods in appendices A-1 through A-7 of this part or other methods and procedures as specified in this section, except as provided in §60.8(b). Acceptable alternative methods and procedures are given in paragraph (e) of this section.

(b) The owner or operator shall determine compliance with the PM standards in §60.672(a) as follows:

(1) Except as specified in paragraphs (e)(3) and (4) of this section, Method 5 of appendix A-3 of this part or Method 17 of appendix A-6 of this part shall be used to determine the particulate matter concentration. The sample volume shall be at least 1.70 dscm (60 dscf). For Method 5 (40 CFR part 60, appendix A-3), if the gas stream being sampled is at ambient temperature, the sampling probe and filter may be operated without heaters. If the gas stream is above ambient temperature, the sampling probe and filter may be operated at a temperature high enough, but no higher than 121 °C (250 °F), to prevent water condensation on the filter.

(2) Method 9 of appendix A-4 of this part and the procedures in §60.11 shall be used to determine opacity.

(c)(1) In determining compliance with the particulate matter standards in §60.672(b) or §60.672(e)(1), the owner or operator shall use Method 9 of appendix A-4 of this part and the procedures in §60.11, with the following additions:

(i) The minimum distance between the observer and the emission source shall be 4.57 meters (15 feet).

(ii) The observer shall, when possible, select a position that minimizes interference from other fugitive emission sources (*e.g.*, road dust). The required observer position relative to the sun (Method 9 of appendix A-4 of this part, Section 2.1) must be followed.

(iii) For affected facilities using wet dust suppression for particulate matter control, a visible mist is sometimes generated by the spray. The water mist must not be confused with particulate matter emissions and is not to be considered a visible emission. When a water mist of this nature is present, the observation of emissions is to be made at a point in the plume where the mist is no longer visible.

(2)(i) In determining compliance with the opacity of stack emissions from any baghouse that controls emissions only from an individual enclosed storage bin under §60.672(f) of this subpart, using Method 9 (40 CFR part 60, appendix A-4), the duration of the Method 9 (40 CFR part 60, appendix A-4) observations shall be 1 hour (ten 6-minute averages).

(ii) The duration of the Method 9 (40 CFR part 60, appendix A-4) observations may be reduced to the duration the affected facility operates (but not less than 30 minutes) for baghouses that control storage bins or enclosed truck or railcar loading stations that operate for less than 1 hour at a time.

(3) When determining compliance with the fugitive emissions standard for any affected facility described under §60.672(b) or §60.672(e)(1) of this subpart, the duration of the Method 9 (40 CFR part 60, appendix A-4) observations must be 30 minutes (five 6-minute averages). Compliance with the applicable fugitive emission limits in Table 3 of this subpart must be based on the average of the five 6-minute averages.

(d) To demonstrate compliance with the fugitive emission limits for buildings specified in §60.672(e)(1), the owner or operator must complete the testing specified in paragraph (d)(1) and (2) of this section. Performance tests must be conducted while all affected facilities inside the building are operating.

(1) If the building encloses any affected facility that commences construction, modification, or reconstruction on or after April 22, 2008, the owner or operator of the affected facility must conduct an initial Method 9 (40 CFR part 60, appendix A-4) performance test according to this section and §60.11.

(2) If the building encloses only affected facilities that commenced construction, modification, or reconstruction before April 22, 2008, and the owner or operator has previously conducted an initial Method 22 (40 CFR part 60, appendix A-7) performance test showing zero visible emissions, then the owner or operator has demonstrated compliance with the opacity limit in §60.672(e)(1). If the owner or operator has not conducted an initial performance test for the building before April 22, 2008, then the owner or operator must conduct an initial Method 9 (40 CFR part 60, appendix A-4) performance test according to this section and §60.11 to show compliance with the opacity limit in §60.672(e)(1).

(e) The owner or operator may use the following as alternatives to the reference methods and procedures specified in this section:

(1) For the method and procedure of paragraph (c) of this section, if emissions from two or more facilities continuously interfere so that the opacity of fugitive emissions from an individual affected facility cannot be read, either of the following procedures may be used:

(i) Use for the combined emission stream the highest fugitive opacity standard applicable to any of the individual affected facilities contributing to the emissions stream.

(ii) Separate the emissions so that the opacity of emissions from each affected facility can be read.

(2) A single visible emission observer may conduct visible emission observations for up to three fugitive, stack, or vent emission points within a 15-second interval if the following conditions are met:

(i) No more than three emission points may be read concurrently.

(ii) All three emission points must be within a 70 degree viewing sector or angle in front of the observer such that the proper sun position can be maintained for all three points.

(iii) If an opacity reading for any one of the three emission points equals or exceeds the applicable standard, then the observer must stop taking readings for the other two points and continue reading just that single point.

(3) Method 5I of appendix A-3 of this part may be used to determine the PM concentration as an alternative to the methods specified in paragraph (b)(1) of this section. Method 5I (40 CFR part 60, appendix A-3) may be useful for affected facilities that operate for less than 1 hour at a time such as (but not limited to) storage bins or enclosed truck or railcar loading stations.

(4) In some cases, velocities of exhaust gases from building vents may be too low to measure accurately with the type S pitot tube specified in EPA Method 2 of appendix A-1 of this part [*i.e.*, velocity head <1.3 mm H<sub>2</sub>O (0.05 in. H<sub>2</sub>O)] and referred to in EPA Method 5 of appendix A-3 of this part. For these conditions, the owner or operator

may determine the average gas flow rate produced by the power fans (*e.g.*, from vendor-supplied fan curves) to the building vent. The owner or operator may calculate the average gas velocity at the building vent measurement site using Equation 1 of this section and use this average velocity in determining and maintaining isokinetic sampling rates.

$$V_e = \frac{Q_f}{A_e} \quad \text{Eq. 1}$$

[View or download PDF](#)

Where:

$V_e$  = average building vent velocity (feet per minute);

$Q_f$  = average fan flow rate (cubic feet per minute); and

$A_e$  = area of building vent and measurement location (square feet).

(f) To comply with §60.676(d), the owner or operator shall record the measurements as required in §60.676(c) using the monitoring devices in §60.674 (a)(1) and (2) during each particulate matter run and shall determine the averages.

(g) For performance tests involving only Method 9 (40 CFR part 60 appendix A-4) testing, the owner or operator may reduce the 30-day advance notification of performance test in §60.7(a)(6) and 60.8(d) to a 7-day advance notification.

(h) [Reserved]

(i) If the initial performance test date for an affected facility falls during a seasonal shut down (as defined in §60.671 of this subpart) of the affected facility, then with approval from the permitting authority, the owner or operator may postpone the initial performance test until no later than 60 calendar days after resuming operation of the affected facility.

[↑ Back to Top](#)

#### **§60.676 Reporting and recordkeeping.**

(a) Each owner or operator seeking to comply with §60.670(d) shall submit to the Administrator the following information about the existing facility being replaced and the replacement piece of equipment.

(1) For a crusher, grinding mill, bucket elevator, bagging operation, or enclosed truck or railcar loading station:

(i) The rated capacity in megagrams or tons per hour of the existing facility being replaced and

(ii) The rated capacity in tons per hour of the replacement equipment.

(2) For a screening operation:

(i) The total surface area of the top screen of the existing screening operation being replaced and

(ii) The total surface area of the top screen of the replacement screening operation.

(3) For a conveyor belt:

(i) The width of the existing belt being replaced and

(ii) The width of the replacement conveyor belt.

(4) For a storage bin:

(i) The rated capacity in megagrams or tons of the existing storage bin being replaced and

(ii) The rated capacity in megagrams or tons of replacement storage bins.

(b)(1) Owners or operators of affected facilities (as defined in §§60.670 and 60.671) for which construction, modification, or reconstruction commenced on or after April 22, 2008, must record each periodic inspection required under §60.674(b) or (c), including dates and any corrective actions taken, in a logbook (in written or electronic format). The owner or operator must keep the logbook onsite and make hard or electronic copies (whichever is requested) of the logbook available to the Administrator upon request.

(2) For each bag leak detection system installed and operated according to §60.674(d), the owner or operator must keep the records specified in paragraphs (b)(2)(i) through (iii) of this section.

(i) Records of the bag leak detection system output;

(ii) Records of bag leak detection system adjustments, including the date and time of the adjustment, the initial bag leak detection system settings, and the final bag leak detection system settings; and

(iii) The date and time of all bag leak detection system alarms, the time that procedures to determine the cause of the alarm were initiated, the cause of the alarm, an explanation of the actions taken, the date and time the cause of the alarm was alleviated, and whether the cause of the alarm was alleviated within 3 hours of the alarm.

(3) The owner or operator of each affected facility demonstrating compliance according to §60.674(e) by following the requirements for processed stone handling operations in the Lime Manufacturing NESHAP (40 CFR part 63, subpart AAAAA) must maintain records of visible emissions observations required by §63.7132(a)(3) and (b) of 40 CFR part 63, subpart AAAAA.

(c) During the initial performance test of a wet scrubber, and daily thereafter, the owner or operator shall record the measurements of both the change in pressure of the gas stream across the scrubber and the scrubbing liquid flow rate.

(d) After the initial performance test of a wet scrubber, the owner or operator shall submit semiannual reports to the Administrator of occurrences when the measurements of the scrubber pressure loss and liquid flow rate decrease by more than 30 percent from the average determined during the most recent performance test.

(e) The reports required under paragraph (d) of this section shall be postmarked within 30 days following end of the second and fourth calendar quarters.

(f) The owner or operator of any affected facility shall submit written reports of the results of all performance tests conducted to demonstrate compliance with the standards set forth in §60.672 of this subpart, including reports of opacity observations made using Method 9 (40 CFR part 60, appendix A-4) to demonstrate compliance with §60.672(b), (e) and (f).

(g) The owner or operator of any wet material processing operation that processes saturated and subsequently processes unsaturated materials, shall submit a report of this change within 30 days following such change. At the time of such change, this screening operation, bucket elevator, or belt conveyor becomes subject to the applicable opacity limit in §60.672(b) and the emission test requirements of §60.11.



(h) The subpart A requirement under §60.7(a)(1) for notification of the date construction or reconstruction commenced is waived for affected facilities under this subpart.

(i) A notification of the actual date of initial startup of each affected facility shall be submitted to the Administrator.

(1) For a combination of affected facilities in a production line that begin actual initial startup on the same day, a single notification of startup may be submitted by the owner or operator to the Administrator. The notification shall be postmarked within 15 days after such date and shall include a description of each affected facility, equipment manufacturer, and serial number of the equipment, if available.

(2) For portable aggregate processing plants, the notification of the actual date of initial startup shall include both the home office and the current address or location of the portable plant.

(j) The requirements of this section remain in force until and unless the Agency, in delegating enforcement authority to a State under section 111(c) of the Act, approves reporting requirements or an alternative means of compliance surveillance adopted by such States. In that event, affected facilities within the State will be relieved of the obligation to comply with the reporting requirements of this section, provided that they comply with requirements established by the State.

(k) Notifications and reports required under this subpart and under subpart A of this part to demonstrate compliance with this subpart need only to be sent to the EPA Region or the State which has been delegated authority according to §60.4(b).

[↑ Back to Top](#)

**Table 1 to Subpart 000 of Part 60—Exceptions to Applicability of Subpart A to Subpart 000**

Subpart A reference	Applies to subpart 000	Explanation
60.4, Address	Yes	Except in §60.4(a) and (b) submittals need not be submitted to both the EPA Region and delegated State authority (§60.676(k)).
60.7, Notification and recordkeeping	Yes	Except in (a)(1) notification of the date construction or reconstruction commenced (§60.676(h)).
		Also, except in (a)(6) performance tests involving only Method 9 (40 CFR part 60, appendix A-4) require a 7-day advance notification instead of 30 days (§60.675(g)).
60.8, Performance tests	Yes	Except in (d) performance tests involving only Method 9 (40 CFR part 60, appendix A-4) require a 7-day advance notification instead of 30 days (§60.675(g)).
60.11, Compliance with standards and maintenance	Yes	Except in (b) under certain conditions (§§60.675(c)), Method 9 (40 CFR part 60, appendix A-4) observation is reduced from 3 hours to 30

requirements		minutes for fugitive emissions.
60.18, General control device	No	Flares will not be used to comply with the emission limits.

[↑ Back to Top](#)

**Table 2 to Subpart OOO of Part 60—Stack Emission Limits for Affected Facilities With Capture Systems**

<b>For * * *</b>	<b>The owner or operator must meet a PM limit of * * *</b>	<b>And the owner or operator must meet an opacity limit of * * *</b>	<b>The owner or operator must demonstrate compliance with these limits by conducting * * *</b>
Affected facilities (as defined in §§60.670 and 60.671) that commenced construction, modification, or reconstruction after August 31, 1983 but before April 22, 2008	0.05 g/dscm (0.022 gr/dscf) <sup>a</sup>	7 percent for dry control devices <sup>b</sup>	An initial performance test according to §60.8 of this part and §60.675 of this subpart; and Monitoring of wet scrubber parameters according to §60.674(a) and §60.676(c), (d), and (e).
Affected facilities (as defined in §§60.670 and 60.671) that commence construction, modification, or reconstruction on or after April 22, 2008	0.032 g/dscm (0.014 gr/dscf) <sup>a</sup>	Not applicable (except for individual enclosed storage bins) 7 percent for dry control devices on individual enclosed storage bins	An initial performance test according to §60.8 of this part and §60.675 of this subpart; and Monitoring of wet scrubber parameters according to §60.674(a) and §60.676(c), (d), and (e); and
			Monitoring of baghouses according to §60.674(c), (d), or (e) and §60.676(b).

<sup>a</sup>Exceptions to the PM limit apply for individual enclosed storage bins and other equipment. See §60.672(d) through (f).

<sup>b</sup>The stack opacity limit and associated opacity testing requirements do not apply for affected facilities using wet scrubbers.

[↑ Back to Top](#)

**Table 3 to Subpart OOO of Part 60—Fugitive Emission Limits**

<b>For * * *</b>	<b>The owner or operator must meet the following fugitive</b>	<b>The owner or operator must</b>	<b>The owner or operator must demonstrate compliance with these</b>
------------------	---	-----------------------------------	---

	<b>emissions limit for grinding mills, screening operations, bucket elevators, transfer points on belt conveyors, bagging operations, storage bins, enclosed truck or railcar loading stations or from any other affected facility (as defined in §§60.670 and 60.671) * * *</b>	<b>meet the following fugitive emissions limit for crushers at which a capture system is not used * * *</b>	<b>limits by conducting * * *</b>
Affected facilities (as defined in §§60.670 and 60.671) that commenced construction, modification, or reconstruction after August 31, 1983 but before April 22, 2008	10 percent opacity	15 percent opacity	An initial performance test according to §60.11 of this part and §60.675 of this subpart.
Affected facilities (as defined in §§60.670 and 60.671) that commence construction, modification, or reconstruction on or after April 22, 2008	7 percent opacity	12 percent opacity	An initial performance test according to §60.11 of this part and §60.675 of this subpart; and Periodic inspections of water sprays according to §60.674(b) and §60.676(b); and
			A repeat performance test according to §60.11 of this part and §60.675 of this subpart within 5 years from the previous performance test for fugitive emissions from affected facilities without water sprays. Affected facilities controlled by water carryover from upstream water sprays that are inspected according to the requirements in §60.674(b) and §60.676(b) are exempt from this 5-year repeat testing requirement.

[↑ Back to Top](#)

[Need assistance?](#)



# **APPENDIX B**

## Electronic Code of Federal Regulations

e-CFR data is current as of September 13, 2018

[Title 40](#) → [Chapter I](#) → [Subchapter C](#) → [Part 63](#) → [Subpart ZZZZ](#)

---

[Browse Next](#)

Title 40: Protection of Environment

[PART 63—NATIONAL EMISSION STANDARDS FOR HAZARDOUS AIR POLLUTANTS FOR SOURCE CATEGORIES \(CONTINUED\)](#)

---

### **Subpart ZZZZ—National Emissions Standards for Hazardous Air Pollutants for Stationary Reciprocating Internal Combustion Engines**

---

#### **Contents**

[What This Subpart Covers](#)

- [§63.6580](#) What is the purpose of subpart ZZZZ?
- [§63.6585](#) Am I subject to this subpart?
- [§63.6590](#) What parts of my plant does this subpart cover?
- [§63.6595](#) When do I have to comply with this subpart?

[Emission and Operating Limitations](#)

- [§63.6600](#) What emission limitations and operating limitations must I meet if I own or operate a stationary RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions?
- [§63.6601](#) What emission limitations must I meet if I own or operate a new or reconstructed 4SLB stationary RICE with a site rating of greater than or equal to 250 brake HP and less than or equal to 500 brake HP located at a major source of HAP emissions?
- [§63.6602](#) What emission limitations and other requirements must I meet if I own or operate an existing stationary RICE with a site rating of equal to or less than 500 brake HP located at a major source of HAP emissions?
- [§63.6603](#) What emission limitations, operating limitations, and other requirements must I meet if I own or operate an existing stationary RICE located at an area source of HAP emissions?
- [§63.6604](#) What fuel requirements must I meet if I own or operate a stationary CI RICE?

[General Compliance Requirements](#)

- [§63.6605](#) What are my general requirements for complying with this subpart?

[Testing and Initial Compliance Requirements](#)

- [§63.6610](#) By what date must I conduct the initial performance tests or other initial compliance demonstrations if I own or operate a stationary RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions?

§63.6611 By what date must I conduct the initial performance tests or other initial compliance demonstrations if I own or operate a new or reconstructed 4SLB SI stationary RICE with a site rating of greater than or equal to 250 and less than or equal to 500 brake HP located at a major source of HAP emissions?

§63.6612 By what date must I conduct the initial performance tests or other initial compliance demonstrations if I own or operate an existing stationary RICE with a site rating of less than or equal to 500 brake HP located at a major source of HAP emissions or an existing stationary RICE located at an area source of HAP emissions?

§63.6615 When must I conduct subsequent performance tests?

§63.6620 What performance tests and other procedures must I use?

§63.6625 What are my monitoring, installation, collection, operation, and maintenance requirements?

§63.6630 How do I demonstrate initial compliance with the emission limitations, operating limitations, and other requirements?

#### Continuous Compliance Requirements

§63.6635 How do I monitor and collect data to demonstrate continuous compliance?

§63.6640 How do I demonstrate continuous compliance with the emission limitations, operating limitations, and other requirements?

#### Notifications, Reports, and Records

§63.6645 What notifications must I submit and when?

§63.6650 What reports must I submit and when?

§63.6655 What records must I keep?

§63.6660 In what form and how long must I keep my records?

#### Other Requirements and Information

§63.6665 What parts of the General Provisions apply to me?

§63.6670 Who implements and enforces this subpart?

§63.6675 What definitions apply to this subpart?

Table 1a to Subpart ZZZZ of Part 63—Emission Limitations for Existing, New, and Reconstructed Spark Ignition, 4SRB Stationary RICE >500 HP Located at a Major Source of HAP Emissions

Table 1b to Subpart ZZZZ of Part 63—Operating Limitations for Existing, New, and Reconstructed SI 4SRB Stationary RICE >500 HP Located at a Major Source of HAP Emissions

Table 2a to Subpart ZZZZ of Part 63—Emission Limitations for New and Reconstructed 2SLB and Compression Ignition Stationary RICE >500 HP and New and Reconstructed 4SLB Stationary RICE  $\geq$ 250 HP Located at a Major Source of HAP Emissions

Table 2b to Subpart ZZZZ of Part 63—Operating Limitations for New and Reconstructed 2SLB and CI Stationary RICE >500 HP Located at a Major Source of HAP Emissions, New and Reconstructed 4SLB Stationary RICE  $\geq$ 250 HP Located at a Major Source of HAP Emissions, Existing CI Stationary RICE >500 HP

Table 2c to Subpart ZZZZ of Part 63—Requirements for Existing Compression Ignition Stationary RICE Located at a Major Source of HAP Emissions and Existing Spark Ignition Stationary RICE  $\leq$ 500 HP Located at a Major Source of HAP Emissions

Table 2d to Subpart ZZZZ of Part 63—Requirements for Existing Stationary RICE Located at Area Sources of HAP Emissions

Table 3 to Subpart ZZZZ of Part 63—Subsequent Performance Tests

Table 4 to Subpart ZZZZ of Part 63—Requirements for Performance Tests

Table 5 to Subpart ZZZZ of Part 63—Initial Compliance With Emission Limitations, Operating Limitations, and Other Requirements

Table 6 to Subpart ZZZZ of Part 63—Continuous Compliance With Emission Limitations, and Other Requirements

[Table 7 to Subpart ZZZZ of Part 63—Requirements for Reports](#)

[Table 8 to Subpart ZZZZ of Part 63—Applicability of General Provisions to Subpart ZZZZ.](#)

[Appendix A to Subpart ZZZZ of Part 63—Protocol for Using an Electrochemical Analyzer to Determine Oxygen and Carbon Monoxide Concentrations From Certain Engines](#)

---

Source: 69 FR 33506, June 15, 2004, unless otherwise noted.

[↑ Back to Top](#)

## What This Subpart Covers

[↑ Back to Top](#)

### **§63.6580 What is the purpose of subpart ZZZZ?**

Subpart ZZZZ establishes national emission limitations and operating limitations for hazardous air pollutants (HAP) emitted from stationary reciprocating internal combustion engines (RICE) located at major and area sources of HAP emissions. This subpart also establishes requirements to demonstrate initial and continuous compliance with the emission limitations and operating limitations.

[73 FR 3603, Jan. 18, 2008]

[↑ Back to Top](#)

### **§63.6585 Am I subject to this subpart?**

You are subject to this subpart if you own or operate a stationary RICE at a major or area source of HAP emissions, except if the stationary RICE is being tested at a stationary RICE test cell/stand.

(a) A stationary RICE is any internal combustion engine which uses reciprocating motion to convert heat energy into mechanical work and which is not mobile. Stationary RICE differ from mobile RICE in that a stationary RICE is not a non-road engine as defined at 40 CFR 1068.30, and is not used to propel a motor vehicle or a vehicle used solely for competition.

(b) A major source of HAP emissions is a plant site that emits or has the potential to emit any single HAP at a rate of 10 tons (9.07 megagrams) or more per year or any combination of HAP at a rate of 25 tons (22.68 megagrams) or more per year, except that for oil and gas production facilities, a major source of HAP emissions is determined for each surface site.

(c) An area source of HAP emissions is a source that is not a major source.

(d) If you are an owner or operator of an area source subject to this subpart, your status as an entity subject to a standard or other requirements under this subpart does not subject you to the obligation to obtain a permit under 40 CFR part 70 or 71, provided you are not required to obtain a permit under 40 CFR 70.3(a) or 40 CFR 71.3(a) for a reason other than your status as an area source under this subpart. Notwithstanding the previous sentence, you must continue to comply with the provisions of this subpart as applicable.

(e) If you are an owner or operator of a stationary RICE used for national security purposes, you may be eligible to request an exemption from the requirements of this subpart as described in 40 CFR part 1068, subpart C.



(f) The emergency stationary RICE listed in paragraphs (f)(1) through (3) of this section are not subject to this subpart. The stationary RICE must meet the definition of an emergency stationary RICE in §63.6675, which includes operating according to the provisions specified in §63.6640(f).

(1) Existing residential emergency stationary RICE located at an area source of HAP emissions that do not operate or are not contractually obligated to be available for more than 15 hours per calendar year for the purposes specified in §63.6640(f)(2)(ii) and (iii) and that do not operate for the purpose specified in §63.6640(f)(4)(ii).

(2) Existing commercial emergency stationary RICE located at an area source of HAP emissions that do not operate or are not contractually obligated to be available for more than 15 hours per calendar year for the purposes specified in §63.6640(f)(2)(ii) and (iii) and that do not operate for the purpose specified in §63.6640(f)(4)(ii).

(3) Existing institutional emergency stationary RICE located at an area source of HAP emissions that do not operate or are not contractually obligated to be available for more than 15 hours per calendar year for the purposes specified in §63.6640(f)(2)(ii) and (iii) and that do not operate for the purpose specified in §63.6640(f)(4)(ii).

[69 FR 33506, June 15, 2004, as amended at 73 FR 3603, Jan. 18, 2008; 78 FR 6700, Jan. 30, 2013]

[↑ Back to Top](#)

### **§63.6590 What parts of my plant does this subpart cover?**

This subpart applies to each affected source.

(a) *Affected source.* An affected source is any existing, new, or reconstructed stationary RICE located at a major or area source of HAP emissions, excluding stationary RICE being tested at a stationary RICE test cell/stand.

(1) *Existing stationary RICE.*

(i) For stationary RICE with a site rating of more than 500 brake horsepower (HP) located at a major source of HAP emissions, a stationary RICE is existing if you commenced construction or reconstruction of the stationary RICE before December 19, 2002.

(ii) For stationary RICE with a site rating of less than or equal to 500 brake HP located at a major source of HAP emissions, a stationary RICE is existing if you commenced construction or reconstruction of the stationary RICE before June 12, 2006.

(iii) For stationary RICE located at an area source of HAP emissions, a stationary RICE is existing if you commenced construction or reconstruction of the stationary RICE before June 12, 2006.

(iv) A change in ownership of an existing stationary RICE does not make that stationary RICE a new or reconstructed stationary RICE.

(2) *New stationary RICE.* (i) A stationary RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions is new if you commenced construction of the stationary RICE on or after December 19, 2002.

(ii) A stationary RICE with a site rating of equal to or less than 500 brake HP located at a major source of HAP emissions is new if you commenced construction of the stationary RICE on or after June 12, 2006.

(iii) A stationary RICE located at an area source of HAP emissions is new if you commenced construction of the stationary RICE on or after June 12, 2006.

(3) *Reconstructed stationary RICE.* (i) A stationary RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions is reconstructed if you meet the definition of reconstruction in §63.2 and reconstruction is commenced on or after December 19, 2002.

(ii) A stationary RICE with a site rating of equal to or less than 500 brake HP located at a major source of HAP emissions is reconstructed if you meet the definition of reconstruction in §63.2 and reconstruction is commenced on or after June 12, 2006.

(iii) A stationary RICE located at an area source of HAP emissions is reconstructed if you meet the definition of reconstruction in §63.2 and reconstruction is commenced on or after June 12, 2006.

(b) *Stationary RICE subject to limited requirements.* (1) An affected source which meets either of the criteria in paragraphs (b)(1)(i) through (ii) of this section does not have to meet the requirements of this subpart and of subpart A of this part except for the initial notification requirements of §63.6645(f).

(i) The stationary RICE is a new or reconstructed emergency stationary RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions that does not operate or is not contractually obligated to be available for more than 15 hours per calendar year for the purposes specified in §63.6640(f)(2)(ii) and (iii).

(ii) The stationary RICE is a new or reconstructed limited use stationary RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions.

(2) A new or reconstructed stationary RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions which combusts landfill or digester gas equivalent to 10 percent or more of the gross heat input on an annual basis must meet the initial notification requirements of §63.6645(f) and the requirements of §63.6625(c), 63.6650(g), and 63.6655(c). These stationary RICE do not have to meet the emission limitations and operating limitations of this subpart.

(3) The following stationary RICE do not have to meet the requirements of this subpart and of subpart A of this part, including initial notification requirements:

(i) Existing spark ignition 2 stroke lean burn (2SLB) stationary RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions;

(ii) Existing spark ignition 4 stroke lean burn (4SLB) stationary RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions;

(iii) Existing emergency stationary RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions that does not operate or is not contractually obligated to be available for more than 15 hours per calendar year for the purposes specified in §63.6640(f)(2)(ii) and (iii).

(iv) Existing limited use stationary RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions;

(v) Existing stationary RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions that combusts landfill gas or digester gas equivalent to 10 percent or more of the gross heat input on an annual basis;

(c) *Stationary RICE subject to Regulations under 40 CFR Part 60.* An affected source that meets any of the criteria in paragraphs (c)(1) through (7) of this section must meet the requirements of this part by meeting the requirements of 40 CFR part 60 subpart IIII, for compression ignition engines or 40 CFR part 60 subpart JJJJ, for spark ignition engines. No further requirements apply for such engines under this part.

- (1) A new or reconstructed stationary RICE located at an area source;
- (2) A new or reconstructed 2SLB stationary RICE with a site rating of less than or equal to 500 brake HP located at a major source of HAP emissions;
- (3) A new or reconstructed 4SLB stationary RICE with a site rating of less than 250 brake HP located at a major source of HAP emissions;
- (4) A new or reconstructed spark ignition 4 stroke rich burn (4SRB) stationary RICE with a site rating of less than or equal to 500 brake HP located at a major source of HAP emissions;
- (5) A new or reconstructed stationary RICE with a site rating of less than or equal to 500 brake HP located at a major source of HAP emissions which combusts landfill or digester gas equivalent to 10 percent or more of the gross heat input on an annual basis;
- (6) A new or reconstructed emergency or limited use stationary RICE with a site rating of less than or equal to 500 brake HP located at a major source of HAP emissions;
- (7) A new or reconstructed compression ignition (CI) stationary RICE with a site rating of less than or equal to 500 brake HP located at a major source of HAP emissions.

[69 FR 33506, June 15, 2004, as amended at 73 FR 3604, Jan. 18, 2008; 75 FR 9674, Mar. 3, 2010; 75 FR 37733, June 30, 2010; 75 FR 51588, Aug. 20, 2010; 78 FR 6700, Jan. 30, 2013]

[↑ Back to Top](#)

#### **§63.6595 When do I have to comply with this subpart?**

- (a) *Affected sources.* (1) If you have an existing stationary RICE, excluding existing non-emergency CI stationary RICE, with a site rating of more than 500 brake HP located at a major source of HAP emissions, you must comply with the applicable emission limitations, operating limitations and other requirements no later than June 15, 2007. If you have an existing non-emergency CI stationary RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions, an existing stationary CI RICE with a site rating of less than or equal to 500 brake HP located at a major source of HAP emissions, or an existing stationary CI RICE located at an area source of HAP emissions, you must comply with the applicable emission limitations, operating limitations, and other requirements no later than May 3, 2013. If you have an existing stationary SI RICE with a site rating of less than or equal to 500 brake HP located at a major source of HAP emissions, or an existing stationary SI RICE located at an area source of HAP emissions, you must comply with the applicable emission limitations, operating limitations, and other requirements no later than October 19, 2013.
- (2) If you start up your new or reconstructed stationary RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions before August 16, 2004, you must comply with the applicable emission limitations and operating limitations in this subpart no later than August 16, 2004.
  - (3) If you start up your new or reconstructed stationary RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions after August 16, 2004, you must comply with the applicable emission limitations and operating limitations in this subpart upon startup of your affected source.
  - (4) If you start up your new or reconstructed stationary RICE with a site rating of less than or equal to 500 brake HP located at a major source of HAP emissions before January 18, 2008, you must comply with the applicable emission limitations and operating limitations in this subpart no later than January 18, 2008.

(5) If you start up your new or reconstructed stationary RICE with a site rating of less than or equal to 500 brake HP located at a major source of HAP emissions after January 18, 2008, you must comply with the applicable emission limitations and operating limitations in this subpart upon startup of your affected source.

(6) If you start up your new or reconstructed stationary RICE located at an area source of HAP emissions before January 18, 2008, you must comply with the applicable emission limitations and operating limitations in this subpart no later than January 18, 2008.

(7) If you start up your new or reconstructed stationary RICE located at an area source of HAP emissions after January 18, 2008, you must comply with the applicable emission limitations and operating limitations in this subpart upon startup of your affected source.

(b) *Area sources that become major sources.* If you have an area source that increases its emissions or its potential to emit such that it becomes a major source of HAP, the compliance dates in paragraphs (b)(1) and (2) of this section apply to you.

(1) Any stationary RICE for which construction or reconstruction is commenced after the date when your area source becomes a major source of HAP must be in compliance with this subpart upon startup of your affected source.

(2) Any stationary RICE for which construction or reconstruction is commenced before your area source becomes a major source of HAP must be in compliance with the provisions of this subpart that are applicable to RICE located at major sources within 3 years after your area source becomes a major source of HAP.

(c) If you own or operate an affected source, you must meet the applicable notification requirements in §63.6645 and in 40 CFR part 63, subpart A.

[69 FR 33506, June 15, 2004, as amended at 73 FR 3604, Jan. 18, 2008; 75 FR 9675, Mar. 3, 2010; 75 FR 51589, Aug. 20, 2010; 78 FR 6701, Jan. 30, 2013]

[↑ Back to Top](#)

## **Emission and Operating Limitations**

[↑ Back to Top](#)

### **§63.6600 What emission limitations and operating limitations must I meet if I own or operate a stationary RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions?**

Compliance with the numerical emission limitations established in this subpart is based on the results of testing the average of three 1-hour runs using the testing requirements and procedures in §63.6620 and Table 4 to this subpart.

(a) If you own or operate an existing, new, or reconstructed spark ignition 4SRB stationary RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions, you must comply with the emission limitations in Table 1a to this subpart and the operating limitations in Table 1b to this subpart which apply to you.

(b) If you own or operate a new or reconstructed 2SLB stationary RICE with a site rating of more than 500 brake HP located at major source of HAP emissions, a new or reconstructed 4SLB stationary RICE with a site rating of more than 500 brake HP located at major source of HAP emissions, or a new or reconstructed CI stationary RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions, you must comply with the emission limitations in Table 2a to this subpart and the operating limitations in Table 2b to this subpart which apply to you.

(c) If you own or operate any of the following stationary RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions, you do not need to comply with the emission limitations in Tables 1a, 2a, 2c, and 2d to this subpart or operating limitations in Tables 1b and 2b to this subpart: an existing 2SLB stationary RICE; an existing 4SLB stationary RICE; a stationary RICE that combusts landfill gas or digester gas equivalent to 10 percent or more of the gross heat input on an annual basis; an emergency stationary RICE; or a limited use stationary RICE.

(d) If you own or operate an existing non-emergency stationary CI RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions, you must comply with the emission limitations in Table 2c to this subpart and the operating limitations in Table 2b to this subpart which apply to you.

[73 FR 3605, Jan. 18, 2008, as amended at 75 FR 9675, Mar. 3, 2010]

[↑ Back to Top](#)

**§63.6601 What emission limitations must I meet if I own or operate a new or reconstructed 4SLB stationary RICE with a site rating of greater than or equal to 250 brake HP and less than or equal to 500 brake HP located at a major source of HAP emissions?**

Compliance with the numerical emission limitations established in this subpart is based on the results of testing the average of three 1-hour runs using the testing requirements and procedures in §63.6620 and Table 4 to this subpart. If you own or operate a new or reconstructed 4SLB stationary RICE with a site rating of greater than or equal to 250 and less than or equal to 500 brake HP located at major source of HAP emissions manufactured on or after January 1, 2008, you must comply with the emission limitations in Table 2a to this subpart and the operating limitations in Table 2b to this subpart which apply to you.

[73 FR 3605, Jan. 18, 2008, as amended at 75 FR 9675, Mar. 3, 2010; 75 FR 51589, Aug. 20, 2010]

[↑ Back to Top](#)

**§63.6602 What emission limitations and other requirements must I meet if I own or operate an existing stationary RICE with a site rating of equal to or less than 500 brake HP located at a major source of HAP emissions?**

If you own or operate an existing stationary RICE with a site rating of equal to or less than 500 brake HP located at a major source of HAP emissions, you must comply with the emission limitations and other requirements in Table 2c to this subpart which apply to you. Compliance with the numerical emission limitations established in this subpart is based on the results of testing the average of three 1-hour runs using the testing requirements and procedures in §63.6620 and Table 4 to this subpart.

[78 FR 6701, Jan. 30, 2013]

[↑ Back to Top](#)

**§63.6603 What emission limitations, operating limitations, and other requirements must I meet if I own or operate an existing stationary RICE located at an area source of HAP emissions?**

Compliance with the numerical emission limitations established in this subpart is based on the results of testing the average of three 1-hour runs using the testing requirements and procedures in §63.6620 and Table 4 to this subpart.

(a) If you own or operate an existing stationary RICE located at an area source of HAP emissions, you must comply with the requirements in Table 2d to this subpart and the operating limitations in Table 2b to this subpart that apply to you.

(b) If you own or operate an existing stationary non-emergency CI RICE with a site rating of more than 300 HP located at an area source of HAP that meets either paragraph (b)(1) or (2) of this section, you do not have to meet the numerical CO emission limitations specified in Table 2d of this subpart. Existing stationary non-emergency CI RICE with a site rating of more than 300 HP located at an area source of HAP that meet either paragraph (b)(1) or (2) of this section must meet the management practices that are shown for stationary non-emergency CI RICE with a site rating of less than or equal to 300 HP in Table 2d of this subpart.

(1) The area source is located in an area of Alaska that is not accessible by the Federal Aid Highway System (FAHS).

(2) The stationary RICE is located at an area source that meets paragraphs (b)(2)(i), (ii), and (iii) of this section.

(i) The only connection to the FAHS is through the Alaska Marine Highway System (AMHS), or the stationary RICE operation is within an isolated grid in Alaska that is not connected to the statewide electrical grid referred to as the Alaska Railbelt Grid.

(ii) At least 10 percent of the power generated by the stationary RICE on an annual basis is used for residential purposes.

(iii) The generating capacity of the area source is less than 12 megawatts, or the stationary RICE is used exclusively for backup power for renewable energy.

(c) If you own or operate an existing stationary non-emergency CI RICE with a site rating of more than 300 HP located on an offshore vessel that is an area source of HAP and is a nonroad vehicle that is an Outer Continental Shelf (OCS) source as defined in 40 CFR 55.2, you do not have to meet the numerical CO emission limitations specified in Table 2d of this subpart. You must meet all of the following management practices:

(1) Change oil every 1,000 hours of operation or annually, whichever comes first. Sources have the option to utilize an oil analysis program as described in §63.6625(i) in order to extend the specified oil change requirement.

(2) Inspect and clean air filters every 750 hours of operation or annually, whichever comes first, and replace as necessary.

(3) Inspect fuel filters and belts, if installed, every 750 hours of operation or annually, whichever comes first, and replace as necessary.

(4) Inspect all flexible hoses every 1,000 hours of operation or annually, whichever comes first, and replace as necessary.

(d) If you own or operate an existing non-emergency CI RICE with a site rating of more than 300 HP located at an area source of HAP emissions that is certified to the Tier 1 or Tier 2 emission standards in Table 1 of 40 CFR 89.112 and that is subject to an enforceable state or local standard that requires the engine to be replaced no later than June 1, 2018, you may until January 1, 2015, or 12 years after the installation date of the engine (whichever is later), but not later than June 1, 2018, choose to comply with the management practices that are shown for stationary non-emergency CI RICE with a site rating of less than or equal to 300 HP in Table 2d of this subpart instead of the applicable emission limitations in Table 2d, operating limitations in Table 2b, and crankcase ventilation system requirements in §63.6625(g). You must comply with the emission limitations in Table 2d and operating limitations in Table 2b that apply for non-emergency CI RICE with a site rating of more than 300 HP located at an area source

of HAP emissions by January 1, 2015, or 12 years after the installation date of the engine (whichever is later), but not later than June 1, 2018. You must also comply with the crankcase ventilation system requirements in §63.6625(g) by January 1, 2015, or 12 years after the installation date of the engine (whichever is later), but not later than June 1, 2018.

(e) If you own or operate an existing non-emergency CI RICE with a site rating of more than 300 HP located at an area source of HAP emissions that is certified to the Tier 3 (Tier 2 for engines above 560 kilowatt (kW)) emission standards in Table 1 of 40 CFR 89.112, you may comply with the requirements under this part by meeting the requirements for Tier 3 engines (Tier 2 for engines above 560 kW) in 40 CFR part 60 subpart IIII instead of the emission limitations and other requirements that would otherwise apply under this part for existing non-emergency CI RICE with a site rating of more than 300 HP located at an area source of HAP emissions.

(f) An existing non-emergency SI 4SLB and 4SRB stationary RICE with a site rating of more than 500 HP located at area sources of HAP must meet the definition of remote stationary RICE in §63.6675 on the initial compliance date for the engine, October 19, 2013, in order to be considered a remote stationary RICE under this subpart. Owners and operators of existing non-emergency SI 4SLB and 4SRB stationary RICE with a site rating of more than 500 HP located at area sources of HAP that meet the definition of remote stationary RICE in §63.6675 of this subpart as of October 19, 2013 must evaluate the status of their stationary RICE every 12 months. Owners and operators must keep records of the initial and annual evaluation of the status of the engine. If the evaluation indicates that the stationary RICE no longer meets the definition of remote stationary RICE in §63.6675 of this subpart, the owner or operator must comply with all of the requirements for existing non-emergency SI 4SLB and 4SRB stationary RICE with a site rating of more than 500 HP located at area sources of HAP that are not remote stationary RICE within 1 year of the evaluation.

[75 FR 9675, Mar. 3, 2010, as amended at 75 FR 51589, Aug. 20, 2010; 76 FR 12866, Mar. 9, 2011; 78 FR 6701, Jan. 30, 2013]

[↑ Back to Top](#)

#### **§63.6604 What fuel requirements must I meet if I own or operate a stationary CI RICE?**

(a) If you own or operate an existing non-emergency, non-black start CI stationary RICE with a site rating of more than 300 brake HP with a displacement of less than 30 liters per cylinder that uses diesel fuel, you must use diesel fuel that meets the requirements in 40 CFR 80.510(b) for nonroad diesel fuel.

(b) Beginning January 1, 2015, if you own or operate an existing emergency CI stationary RICE with a site rating of more than 100 brake HP and a displacement of less than 30 liters per cylinder that uses diesel fuel and operates or is contractually obligated to be available for more than 15 hours per calendar year for the purposes specified in §63.6640(f)(2)(ii) and (iii) or that operates for the purpose specified in §63.6640(f)(4)(ii), you must use diesel fuel that meets the requirements in 40 CFR 80.510(b) for nonroad diesel fuel, except that any existing diesel fuel purchased (or otherwise obtained) prior to January 1, 2015, may be used until depleted.

(c) Beginning January 1, 2015, if you own or operate a new emergency CI stationary RICE with a site rating of more than 500 brake HP and a displacement of less than 30 liters per cylinder located at a major source of HAP that uses diesel fuel and operates or is contractually obligated to be available for more than 15 hours per calendar year for the purposes specified in §63.6640(f)(2)(ii) and (iii), you must use diesel fuel that meets the requirements in 40 CFR 80.510(b) for nonroad diesel fuel, except that any existing diesel fuel purchased (or otherwise obtained) prior to January 1, 2015, may be used until depleted.

(d) Existing CI stationary RICE located in Guam, American Samoa, the Commonwealth of the Northern Mariana Islands, at area sources in areas of Alaska that meet either §63.6603(b)(1) or §63.6603(b)(2), or are on offshore vessels that meet §63.6603(c) are exempt from the requirements of this section.

[78 FR 6702, Jan. 30, 2013]

[↑ Back to Top](#)

## General Compliance Requirements

[↑ Back to Top](#)

### **§63.6605 What are my general requirements for complying with this subpart?**

(a) You must be in compliance with the emission limitations, operating limitations, and other requirements in this subpart that apply to you at all times.

(b) At all times you must operate and maintain any affected source, including associated air pollution control equipment and monitoring equipment, in a manner consistent with safety and good air pollution control practices for minimizing emissions. The general duty to minimize emissions does not require you to make any further efforts to reduce emissions if levels required by this standard have been achieved. Determination of whether such operation and maintenance procedures are being used will be based on information available to the Administrator which may include, but is not limited to, monitoring results, review of operation and maintenance procedures, review of operation and maintenance records, and inspection of the source.

[75 FR 9675, Mar. 3, 2010, as amended at 78 FR 6702, Jan. 30, 2013]

[↑ Back to Top](#)

## Testing and Initial Compliance Requirements

[↑ Back to Top](#)

### **§63.6610 By what date must I conduct the initial performance tests or other initial compliance demonstrations if I own or operate a stationary RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions?**

If you own or operate a stationary RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions you are subject to the requirements of this section.

(a) You must conduct the initial performance test or other initial compliance demonstrations in Table 4 to this subpart that apply to you within 180 days after the compliance date that is specified for your stationary RICE in §63.6595 and according to the provisions in §63.7(a)(2).

(b) If you commenced construction or reconstruction between December 19, 2002 and June 15, 2004 and own or operate stationary RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions, you must demonstrate initial compliance with either the proposed emission limitations or the promulgated emission limitations no later than February 10, 2005 or no later than 180 days after startup of the source, whichever is later, according to §63.7(a)(2)(ix).

(c) If you commenced construction or reconstruction between December 19, 2002 and June 15, 2004 and own or operate stationary RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions,



and you chose to comply with the proposed emission limitations when demonstrating initial compliance, you must conduct a second performance test to demonstrate compliance with the promulgated emission limitations by December 13, 2007 or after startup of the source, whichever is later, according to §63.7(a)(2)(ix).

(d) An owner or operator is not required to conduct an initial performance test on units for which a performance test has been previously conducted, but the test must meet all of the conditions described in paragraphs (d)(1) through (5) of this section.

(1) The test must have been conducted using the same methods specified in this subpart, and these methods must have been followed correctly.

(2) The test must not be older than 2 years.

(3) The test must be reviewed and accepted by the Administrator.

(4) Either no process or equipment changes must have been made since the test was performed, or the owner or operator must be able to demonstrate that the results of the performance test, with or without adjustments, reliably demonstrate compliance despite process or equipment changes.

(5) The test must be conducted at any load condition within plus or minus 10 percent of 100 percent load.

[69 FR 33506, June 15, 2004, as amended at 73 FR 3605, Jan. 18, 2008]

[↑ Back to Top](#)

**§63.6611 By what date must I conduct the initial performance tests or other initial compliance demonstrations if I own or operate a new or reconstructed 4SLB SI stationary RICE with a site rating of greater than or equal to 250 and less than or equal to 500 brake HP located at a major source of HAP emissions?**

If you own or operate a new or reconstructed 4SLB stationary RICE with a site rating of greater than or equal to 250 and less than or equal to 500 brake HP located at a major source of HAP emissions, you must conduct an initial performance test within 240 days after the compliance date that is specified for your stationary RICE in §63.6595 and according to the provisions specified in Table 4 to this subpart, as appropriate.

[73 FR 3605, Jan. 18, 2008, as amended at 75 FR 51589, Aug. 20, 2010]

[↑ Back to Top](#)

**§63.6612 By what date must I conduct the initial performance tests or other initial compliance demonstrations if I own or operate an existing stationary RICE with a site rating of less than or equal to 500 brake HP located at a major source of HAP emissions or an existing stationary RICE located at an area source of HAP emissions?**

If you own or operate an existing stationary RICE with a site rating of less than or equal to 500 brake HP located at a major source of HAP emissions or an existing stationary RICE located at an area source of HAP emissions you are subject to the requirements of this section.

(a) You must conduct any initial performance test or other initial compliance demonstration according to Tables 4 and 5 to this subpart that apply to you within 180 days after the compliance date that is specified for your stationary RICE in §63.6595 and according to the provisions in §63.7(a)(2).

(b) An owner or operator is not required to conduct an initial performance test on a unit for which a performance test has been previously conducted, but the test must meet all of the conditions described in paragraphs (b)(1) through (4) of this section.

(1) The test must have been conducted using the same methods specified in this subpart, and these methods must have been followed correctly.

(2) The test must not be older than 2 years.

(3) The test must be reviewed and accepted by the Administrator.

(4) Either no process or equipment changes must have been made since the test was performed, or the owner or operator must be able to demonstrate that the results of the performance test, with or without adjustments, reliably demonstrate compliance despite process or equipment changes.

[75 FR 9676, Mar. 3, 2010, as amended at 75 FR 51589, Aug. 20, 2010]

[↑ Back to Top](#)

#### **§63.6615 When must I conduct subsequent performance tests?**

If you must comply with the emission limitations and operating limitations, you must conduct subsequent performance tests as specified in Table 3 of this subpart.

[↑ Back to Top](#)

#### **§63.6620 What performance tests and other procedures must I use?**

(a) You must conduct each performance test in Tables 3 and 4 of this subpart that applies to you.

(b) Each performance test must be conducted according to the requirements that this subpart specifies in Table 4 to this subpart. If you own or operate a non-operational stationary RICE that is subject to performance testing, you do not need to start up the engine solely to conduct the performance test. Owners and operators of a non-operational engine can conduct the performance test when the engine is started up again. The test must be conducted at any load condition within plus or minus 10 percent of 100 percent load for the stationary RICE listed in paragraphs (b)(1) through (4) of this section.

(1) Non-emergency 4SRB stationary RICE with a site rating of greater than 500 brake HP located at a major source of HAP emissions.

(2) New non-emergency 4SLB stationary RICE with a site rating of greater than or equal to 250 brake HP located at a major source of HAP emissions.

(3) New non-emergency 2SLB stationary RICE with a site rating of greater than 500 brake HP located at a major source of HAP emissions.

(4) New non-emergency CI stationary RICE with a site rating of greater than 500 brake HP located at a major source of HAP emissions.

(c) [Reserved]

(d) You must conduct three separate test runs for each performance test required in this section, as specified in §63.7(e)(3). Each test run must last at least 1 hour, unless otherwise specified in this subpart.

(e)(1) You must use Equation 1 of this section to determine compliance with the percent reduction requirement:

$$\frac{C_i - C_o}{C_i} \times 100 = R \quad (\text{Eq. 1})$$

[View or download PDF](#)

Where:

$C_i$  = concentration of carbon monoxide (CO), total hydrocarbons (THC), or formaldehyde at the control device inlet,

$C_o$  = concentration of CO, THC, or formaldehyde at the control device outlet, and

R = percent reduction of CO, THC, or formaldehyde emissions.

(2) You must normalize the CO, THC, or formaldehyde concentrations at the inlet and outlet of the control device to a dry basis and to 15 percent oxygen, or an equivalent percent carbon dioxide ( $\text{CO}_2$ ). If pollutant concentrations are to be corrected to 15 percent oxygen and  $\text{CO}_2$  concentration is measured in lieu of oxygen concentration measurement, a  $\text{CO}_2$  correction factor is needed. Calculate the  $\text{CO}_2$  correction factor as described in paragraphs (e)(2)(i) through (iii) of this section.

(i) Calculate the fuel-specific  $F_o$  value for the fuel burned during the test using values obtained from Method 19, Section 5.2, and the following equation:

$$F_o = \frac{0.209 F_d}{F_c} \quad (\text{Eq. 2})$$

[View or download PDF](#)

Where:

$F_o$  = Fuel factor based on the ratio of oxygen volume to the ultimate  $\text{CO}_2$  volume produced by the fuel at zero percent excess air.

0.209 = Fraction of air that is oxygen, percent/100.

$F_d$  = Ratio of the volume of dry effluent gas to the gross calorific value of the fuel from Method 19,  $\text{dsm}^3/\text{J}$  ( $\text{dscf}/10^6$  Btu).

$F_c$  = Ratio of the volume of  $\text{CO}_2$  produced to the gross calorific value of the fuel from Method 19,  $\text{dsm}^3/\text{J}$  ( $\text{dscf}/10^6$  Btu)

(ii) Calculate the  $\text{CO}_2$  correction factor for correcting measurement data to 15 percent  $\text{O}_2$ , as follows:

$$X_{\text{CO}_2} = \frac{5.9}{F_o} \quad (\text{Eq. 3})$$

[View or download PDF](#)

Where:

$X_{\text{CO}_2}$  =  $\text{CO}_2$  correction factor, percent.

5.9 = 20.9 percent  $\text{O}_2$ —15 percent  $\text{O}_2$ , the defined  $\text{O}_2$  correction value, percent.

(iii) Calculate the CO, THC, and formaldehyde gas concentrations adjusted to 15 percent O<sub>2</sub> using CO<sub>2</sub> as follows:

$$C_{adj} = C_d \frac{X_{CO_2}}{\%CO_2} \quad (\text{Eq. 4})$$

[View or download PDF](#)

Where:

$C_{adj}$  = Calculated concentration of CO, THC, or formaldehyde adjusted to 15 percent O<sub>2</sub>.

$C_d$  = Measured concentration of CO, THC, or formaldehyde, uncorrected.

$X_{CO_2}$  = CO<sub>2</sub> correction factor, percent.

$\%CO_2$  = Measured CO<sub>2</sub> concentration measured, dry basis, percent.

(f) If you comply with the emission limitation to reduce CO and you are not using an oxidation catalyst, if you comply with the emission limitation to reduce formaldehyde and you are not using NSCR, or if you comply with the emission limitation to limit the concentration of formaldehyde in the stationary RICE exhaust and you are not using an oxidation catalyst or NSCR, you must petition the Administrator for operating limitations to be established during the initial performance test and continuously monitored thereafter; or for approval of no operating limitations. You must not conduct the initial performance test until after the petition has been approved by the Administrator.

(g) If you petition the Administrator for approval of operating limitations, your petition must include the information described in paragraphs (g)(1) through (5) of this section.

(1) Identification of the specific parameters you propose to use as operating limitations;

(2) A discussion of the relationship between these parameters and HAP emissions, identifying how HAP emissions change with changes in these parameters, and how limitations on these parameters will serve to limit HAP emissions;

(3) A discussion of how you will establish the upper and/or lower values for these parameters which will establish the limits on these parameters in the operating limitations;

(4) A discussion identifying the methods you will use to measure and the instruments you will use to monitor these parameters, as well as the relative accuracy and precision of these methods and instruments; and

(5) A discussion identifying the frequency and methods for recalibrating the instruments you will use for monitoring these parameters.

(h) If you petition the Administrator for approval of no operating limitations, your petition must include the information described in paragraphs (h)(1) through (7) of this section.

(1) Identification of the parameters associated with operation of the stationary RICE and any emission control device which could change intentionally (*e.g.*, operator adjustment, automatic controller adjustment, etc.) or unintentionally (*e.g.*, wear and tear, error, etc.) on a routine basis or over time;

(2) A discussion of the relationship, if any, between changes in the parameters and changes in HAP emissions;

(3) For the parameters which could change in such a way as to increase HAP emissions, a discussion of whether establishing limitations on the parameters would serve to limit HAP emissions;

- (4) For the parameters which could change in such a way as to increase HAP emissions, a discussion of how you could establish upper and/or lower values for the parameters which would establish limits on the parameters in operating limitations;
- (5) For the parameters, a discussion identifying the methods you could use to measure them and the instruments you could use to monitor them, as well as the relative accuracy and precision of the methods and instruments;
- (6) For the parameters, a discussion identifying the frequency and methods for recalibrating the instruments you could use to monitor them; and
- (7) A discussion of why, from your point of view, it is infeasible or unreasonable to adopt the parameters as operating limitations.
- (i) The engine percent load during a performance test must be determined by documenting the calculations, assumptions, and measurement devices used to measure or estimate the percent load in a specific application. A written report of the average percent load determination must be included in the notification of compliance status. The following information must be included in the written report: the engine model number, the engine manufacturer, the year of purchase, the manufacturer's site-rated brake horsepower, the ambient temperature, pressure, and humidity during the performance test, and all assumptions that were made to estimate or calculate percent load during the performance test must be clearly explained. If measurement devices such as flow meters, kilowatt meters, beta analyzers, stain gauges, etc. are used, the model number of the measurement device, and an estimate of its accurate in percentage of true value must be provided.

[69 FR 33506, June 15, 2004, as amended at 75 FR 9676, Mar. 3, 2010; 78 FR 6702, Jan. 30, 2013]

[↑ Back to Top](#)

#### **§63.6625 What are my monitoring, installation, collection, operation, and maintenance requirements?**

- (a) If you elect to install a CEMS as specified in Table 5 of this subpart, you must install, operate, and maintain a CEMS to monitor CO and either O<sub>2</sub> or CO<sub>2</sub> according to the requirements in paragraphs (a)(1) through (4) of this section. If you are meeting a requirement to reduce CO emissions, the CEMS must be installed at both the inlet and outlet of the control device. If you are meeting a requirement to limit the concentration of CO, the CEMS must be installed at the outlet of the control device.
- (1) Each CEMS must be installed, operated, and maintained according to the applicable performance specifications of 40 CFR part 60, appendix B.
- (2) You must conduct an initial performance evaluation and an annual relative accuracy test audit (RATA) of each CEMS according to the requirements in §63.8 and according to the applicable performance specifications of 40 CFR part 60, appendix B as well as daily and periodic data quality checks in accordance with 40 CFR part 60, appendix F, procedure 1.
- (3) As specified in §63.8(c)(4)(ii), each CEMS must complete a minimum of one cycle of operation (sampling, analyzing, and data recording) for each successive 15-minute period. You must have at least two data points, with each representing a different 15-minute period, to have a valid hour of data.
- (4) The CEMS data must be reduced as specified in §63.8(g)(2) and recorded in parts per million or parts per billion (as appropriate for the applicable limitation) at 15 percent oxygen or the equivalent CO<sub>2</sub> concentration.
- (b) If you are required to install a continuous parameter monitoring system (CPMS) as specified in Table 5 of this subpart, you must install, operate, and maintain each CPMS according to the requirements in paragraphs (b)(1)

through (6) of this section. For an affected source that is complying with the emission limitations and operating limitations on March 9, 2011, the requirements in paragraph (b) of this section are applicable September 6, 2011.

(1) You must prepare a site-specific monitoring plan that addresses the monitoring system design, data collection, and the quality assurance and quality control elements outlined in paragraphs (b)(1)(i) through (v) of this section and in §63.8(d). As specified in §63.8(f)(4), you may request approval of monitoring system quality assurance and quality control procedures alternative to those specified in paragraphs (b)(1) through (5) of this section in your site-specific monitoring plan.

(i) The performance criteria and design specifications for the monitoring system equipment, including the sample interface, detector signal analyzer, and data acquisition and calculations;

(ii) Sampling interface (*e.g.*, thermocouple) location such that the monitoring system will provide representative measurements;

(iii) Equipment performance evaluations, system accuracy audits, or other audit procedures;

(iv) Ongoing operation and maintenance procedures in accordance with provisions in §63.8(c)(1)(ii) and (c)(3); and

(v) Ongoing reporting and recordkeeping procedures in accordance with provisions in §63.10(c), (e)(1), and (e)(2)(i).

(2) You must install, operate, and maintain each CPMS in continuous operation according to the procedures in your site-specific monitoring plan.

(3) The CPMS must collect data at least once every 15 minutes (see also §63.6635).

(4) For a CPMS for measuring temperature range, the temperature sensor must have a minimum tolerance of 2.8 degrees Celsius (5 degrees Fahrenheit) or 1 percent of the measurement range, whichever is larger.

(5) You must conduct the CPMS equipment performance evaluation, system accuracy audits, or other audit procedures specified in your site-specific monitoring plan at least annually.

(6) You must conduct a performance evaluation of each CPMS in accordance with your site-specific monitoring plan.

(c) If you are operating a new or reconstructed stationary RICE which fires landfill gas or digester gas equivalent to 10 percent or more of the gross heat input on an annual basis, you must monitor and record your fuel usage daily with separate fuel meters to measure the volumetric flow rate of each fuel. In addition, you must operate your stationary RICE in a manner which reasonably minimizes HAP emissions.

(d) If you are operating a new or reconstructed emergency 4SLB stationary RICE with a site rating of greater than or equal to 250 and less than or equal to 500 brake HP located at a major source of HAP emissions, you must install a non-resettable hour meter prior to the startup of the engine.

(e) If you own or operate any of the following stationary RICE, you must operate and maintain the stationary RICE and after-treatment control device (if any) according to the manufacturer's emission-related written instructions or develop your own maintenance plan which must provide to the extent practicable for the maintenance and operation of the engine in a manner consistent with good air pollution control practice for minimizing emissions:

(1) An existing stationary RICE with a site rating of less than 100 HP located at a major source of HAP emissions;

(2) An existing emergency or black start stationary RICE with a site rating of less than or equal to 500 HP located at a major source of HAP emissions;

(3) An existing emergency or black start stationary RICE located at an area source of HAP emissions;

(4) An existing non-emergency, non-black start stationary CI RICE with a site rating less than or equal to 300 HP located at an area source of HAP emissions;

(5) An existing non-emergency, non-black start 2SLB stationary RICE located at an area source of HAP emissions;

(6) An existing non-emergency, non-black start stationary RICE located at an area source of HAP emissions which combusts landfill or digester gas equivalent to 10 percent or more of the gross heat input on an annual basis.

(7) An existing non-emergency, non-black start 4SLB stationary RICE with a site rating less than or equal to 500 HP located at an area source of HAP emissions;

(8) An existing non-emergency, non-black start 4SRB stationary RICE with a site rating less than or equal to 500 HP located at an area source of HAP emissions;

(9) An existing, non-emergency, non-black start 4SLB stationary RICE with a site rating greater than 500 HP located at an area source of HAP emissions that is operated 24 hours or less per calendar year; and

(10) An existing, non-emergency, non-black start 4SRB stationary RICE with a site rating greater than 500 HP located at an area source of HAP emissions that is operated 24 hours or less per calendar year.

(f) If you own or operate an existing emergency stationary RICE with a site rating of less than or equal to 500 brake HP located at a major source of HAP emissions or an existing emergency stationary RICE located at an area source of HAP emissions, you must install a non-resettable hour meter if one is not already installed.

(g) If you own or operate an existing non-emergency, non-black start CI engine greater than or equal to 300 HP that is not equipped with a closed crankcase ventilation system, you must comply with either paragraph (g)(1) or paragraph (2) of this section. Owners and operators must follow the manufacturer's specified maintenance requirements for operating and maintaining the open or closed crankcase ventilation systems and replacing the crankcase filters, or can request the Administrator to approve different maintenance requirements that are as protective as manufacturer requirements. Existing CI engines located at area sources in areas of Alaska that meet either §63.6603(b)(1) or §63.6603(b)(2) do not have to meet the requirements of this paragraph (g). Existing CI engines located on offshore vessels that meet §63.6603(c) do not have to meet the requirements of this paragraph (g).

(1) Install a closed crankcase ventilation system that prevents crankcase emissions from being emitted to the atmosphere, or

(2) Install an open crankcase filtration emission control system that reduces emissions from the crankcase by filtering the exhaust stream to remove oil mist, particulates and metals.

(h) If you operate a new, reconstructed, or existing stationary engine, you must minimize the engine's time spent at idle during startup and minimize the engine's startup time to a period needed for appropriate and safe loading of the engine, not to exceed 30 minutes, after which time the emission standards applicable to all times other than startup in Tables 1a, 2a, 2c, and 2d to this subpart apply.

(i) If you own or operate a stationary CI engine that is subject to the work, operation or management practices in items 1 or 2 of Table 2c to this subpart or in items 1 or 4 of Table 2d to this subpart, you have the option of utilizing

an oil analysis program in order to extend the specified oil change requirement in Tables 2c and 2d to this subpart. The oil analysis must be performed at the same frequency specified for changing the oil in Table 2c or 2d to this subpart. The analysis program must at a minimum analyze the following three parameters: Total Base Number, viscosity, and percent water content. The condemning limits for these parameters are as follows: Total Base Number is less than 30 percent of the Total Base Number of the oil when new; viscosity of the oil has changed by more than 20 percent from the viscosity of the oil when new; or percent water content (by volume) is greater than 0.5. If all of these condemning limits are not exceeded, the engine owner or operator is not required to change the oil. If any of the limits are exceeded, the engine owner or operator must change the oil within 2 business days of receiving the results of the analysis; if the engine is not in operation when the results of the analysis are received, the engine owner or operator must change the oil within 2 business days or before commencing operation, whichever is later. The owner or operator must keep records of the parameters that are analyzed as part of the program, the results of the analysis, and the oil changes for the engine. The analysis program must be part of the maintenance plan for the engine.

(j) If you own or operate a stationary SI engine that is subject to the work, operation or management practices in items 6, 7, or 8 of Table 2c to this subpart or in items 5, 6, 7, 9, or 11 of Table 2d to this subpart, you have the option of utilizing an oil analysis program in order to extend the specified oil change requirement in Tables 2c and 2d to this subpart. The oil analysis must be performed at the same frequency specified for changing the oil in Table 2c or 2d to this subpart. The analysis program must at a minimum analyze the following three parameters: Total Acid Number, viscosity, and percent water content. The condemning limits for these parameters are as follows: Total Acid Number increases by more than 3.0 milligrams of potassium hydroxide (KOH) per gram from Total Acid Number of the oil when new; viscosity of the oil has changed by more than 20 percent from the viscosity of the oil when new; or percent water content (by volume) is greater than 0.5. If all of these condemning limits are not exceeded, the engine owner or operator is not required to change the oil. If any of the limits are exceeded, the engine owner or operator must change the oil within 2 business days of receiving the results of the analysis; if the engine is not in operation when the results of the analysis are received, the engine owner or operator must change the oil within 2 business days or before commencing operation, whichever is later. The owner or operator must keep records of the parameters that are analyzed as part of the program, the results of the analysis, and the oil changes for the engine. The analysis program must be part of the maintenance plan for the engine.

[69 FR 33506, June 15, 2004, as amended at 73 FR 3606, Jan. 18, 2008; 75 FR 9676, Mar. 3, 2010; 75 FR 51589, Aug. 20, 2010; 76 FR 12866, Mar. 9, 2011; 78 FR 6703, Jan. 30, 2013]

[↑ Back to Top](#)

### **§63.6630 How do I demonstrate initial compliance with the emission limitations, operating limitations, and other requirements?**

- (a) You must demonstrate initial compliance with each emission limitation, operating limitation, and other requirement that applies to you according to Table 5 of this subpart.
- (b) During the initial performance test, you must establish each operating limitation in Tables 1b and 2b of this subpart that applies to you.
- (c) You must submit the Notification of Compliance Status containing the results of the initial compliance demonstration according to the requirements in §63.6645.
- (d) Non-emergency 4SRB stationary RICE complying with the requirement to reduce formaldehyde emissions by 76 percent or more can demonstrate initial compliance with the formaldehyde emission limit by testing for THC instead of formaldehyde. The testing must be conducted according to the requirements in Table 4 of this subpart. The



average reduction of emissions of THC determined from the performance test must be equal to or greater than 30 percent.

(e) The initial compliance demonstration required for existing non-emergency 4SLB and 4SRB stationary RICE with a site rating of more than 500 HP located at an area source of HAP that are not remote stationary RICE and that are operated more than 24 hours per calendar year must be conducted according to the following requirements:

- (1) The compliance demonstration must consist of at least three test runs.
- (2) Each test run must be of at least 15 minute duration, except that each test conducted using the method in appendix A to this subpart must consist of at least one measurement cycle and include at least 2 minutes of test data phase measurement.
- (3) If you are demonstrating compliance with the CO concentration or CO percent reduction requirement, you must measure CO emissions using one of the CO measurement methods specified in Table 4 of this subpart, or using appendix A to this subpart.
- (4) If you are demonstrating compliance with the THC percent reduction requirement, you must measure THC emissions using Method 25A, reported as propane, of 40 CFR part 60, appendix A.
- (5) You must measure O<sub>2</sub> using one of the O<sub>2</sub> measurement methods specified in Table 4 of this subpart. Measurements to determine O<sub>2</sub> concentration must be made at the same time as the measurements for CO or THC concentration.
- (6) If you are demonstrating compliance with the CO or THC percent reduction requirement, you must measure CO or THC emissions and O<sub>2</sub> emissions simultaneously at the inlet and outlet of the control device.

[69 FR 33506, June 15, 2004, as amended at 78 FR 6704, Jan. 30, 2013]

[↑ Back to Top](#)

### **Continuous Compliance Requirements**

[↑ Back to Top](#)

#### **§63.6635 How do I monitor and collect data to demonstrate continuous compliance?**

- (a) If you must comply with emission and operating limitations, you must monitor and collect data according to this section.
- (b) Except for monitor malfunctions, associated repairs, required performance evaluations, and required quality assurance or control activities, you must monitor continuously at all times that the stationary RICE is operating. A monitoring malfunction is any sudden, infrequent, not reasonably preventable failure of the monitoring to provide valid data. Monitoring failures that are caused in part by poor maintenance or careless operation are not malfunctions.
- (c) You may not use data recorded during monitoring malfunctions, associated repairs, and required quality assurance or control activities in data averages and calculations used to report emission or operating levels. You must, however, use all the valid data collected during all other periods.

[69 FR 33506, June 15, 2004, as amended at 76 FR 12867, Mar. 9, 2011]

[↑ Back to Top](#)

**§63.6640 How do I demonstrate continuous compliance with the emission limitations, operating limitations, and other requirements?**

(a) You must demonstrate continuous compliance with each emission limitation, operating limitation, and other requirements in Tables 1a and 1b, Tables 2a and 2b, Table 2c, and Table 2d to this subpart that apply to you according to methods specified in Table 6 to this subpart.

(b) You must report each instance in which you did not meet each emission limitation or operating limitation in Tables 1a and 1b, Tables 2a and 2b, Table 2c, and Table 2d to this subpart that apply to you. These instances are deviations from the emission and operating limitations in this subpart. These deviations must be reported according to the requirements in §63.6650. If you change your catalyst, you must reestablish the values of the operating parameters measured during the initial performance test. When you reestablish the values of your operating parameters, you must also conduct a performance test to demonstrate that you are meeting the required emission limitation applicable to your stationary RICE.

(c) The annual compliance demonstration required for existing non-emergency 4SLB and 4SRB stationary RICE with a site rating of more than 500 HP located at an area source of HAP that are not remote stationary RICE and that are operated more than 24 hours per calendar year must be conducted according to the following requirements:

(1) The compliance demonstration must consist of at least one test run.

(2) Each test run must be of at least 15 minute duration, except that each test conducted using the method in appendix A to this subpart must consist of at least one measurement cycle and include at least 2 minutes of test data phase measurement.

(3) If you are demonstrating compliance with the CO concentration or CO percent reduction requirement, you must measure CO emissions using one of the CO measurement methods specified in Table 4 of this subpart, or using appendix A to this subpart.

(4) If you are demonstrating compliance with the THC percent reduction requirement, you must measure THC emissions using Method 25A, reported as propane, of 40 CFR part 60, appendix A.

(5) You must measure O<sub>2</sub> using one of the O<sub>2</sub> measurement methods specified in Table 4 of this subpart. Measurements to determine O<sub>2</sub> concentration must be made at the same time as the measurements for CO or THC concentration.

(6) If you are demonstrating compliance with the CO or THC percent reduction requirement, you must measure CO or THC emissions and O<sub>2</sub> emissions simultaneously at the inlet and outlet of the control device.

(7) If the results of the annual compliance demonstration show that the emissions exceed the levels specified in Table 6 of this subpart, the stationary RICE must be shut down as soon as safely possible, and appropriate corrective action must be taken (e.g., repairs, catalyst cleaning, catalyst replacement). The stationary RICE must be retested within 7 days of being restarted and the emissions must meet the levels specified in Table 6 of this subpart. If the retest shows that the emissions continue to exceed the specified levels, the stationary RICE must again be shut down as soon as safely possible, and the stationary RICE may not operate, except for purposes of startup and testing, until the owner/operator demonstrates through testing that the emissions do not exceed the levels specified in Table 6 of this subpart.

(d) For new, reconstructed, and rebuilt stationary RICE, deviations from the emission or operating limitations that occur during the first 200 hours of operation from engine startup (engine burn-in period) are not violations. Rebuilt stationary RICE means a stationary RICE that has been rebuilt as that term is defined in 40 CFR 94.11(a).

(e) You must also report each instance in which you did not meet the requirements in Table 8 to this subpart that apply to you. If you own or operate a new or reconstructed stationary RICE with a site rating of less than or equal to 500 brake HP located at a major source of HAP emissions (except new or reconstructed 4SLB engines greater than or equal to 250 and less than or equal to 500 brake HP), a new or reconstructed stationary RICE located at an area source of HAP emissions, or any of the following RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions, you do not need to comply with the requirements in Table 8 to this subpart: An existing 2SLB stationary RICE, an existing 4SLB stationary RICE, an existing emergency stationary RICE, an existing limited use stationary RICE, or an existing stationary RICE which fires landfill gas or digester gas equivalent to 10 percent or more of the gross heat input on an annual basis. If you own or operate any of the following RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions, you do not need to comply with the requirements in Table 8 to this subpart, except for the initial notification requirements: a new or reconstructed stationary RICE that combusts landfill gas or digester gas equivalent to 10 percent or more of the gross heat input on an annual basis, a new or reconstructed emergency stationary RICE, or a new or reconstructed limited use stationary RICE.

(f) If you own or operate an emergency stationary RICE, you must operate the emergency stationary RICE according to the requirements in paragraphs (f)(1) through (4) of this section. In order for the engine to be considered an emergency stationary RICE under this subpart, any operation other than emergency operation, maintenance and testing, emergency demand response, and operation in non-emergency situations for 50 hours per year, as described in paragraphs (f)(1) through (4) of this section, is prohibited. If you do not operate the engine according to the requirements in paragraphs (f)(1) through (4) of this section, the engine will not be considered an emergency engine under this subpart and must meet all requirements for non-emergency engines.

(1) There is no time limit on the use of emergency stationary RICE in emergency situations.

(2) You may operate your emergency stationary RICE for any combination of the purposes specified in paragraphs (f)(2)(i) through (iii) of this section for a maximum of 100 hours per calendar year. Any operation for non-emergency situations as allowed by paragraphs (f)(3) and (4) of this section counts as part of the 100 hours per calendar year allowed by this paragraph (f)(2).

(i) Emergency stationary RICE may be operated for maintenance checks and readiness testing, provided that the tests are recommended by federal, state or local government, the manufacturer, the vendor, the regional transmission organization or equivalent balancing authority and transmission operator, or the insurance company associated with the engine. The owner or operator may petition the Administrator for approval of additional hours to be used for maintenance checks and readiness testing, but a petition is not required if the owner or operator maintains records indicating that federal, state, or local standards require maintenance and testing of emergency RICE beyond 100 hours per calendar year.

(ii) Emergency stationary RICE may be operated for emergency demand response for periods in which the Reliability Coordinator under the North American Electric Reliability Corporation (NERC) Reliability Standard EOP-002-3, Capacity and Energy Emergencies (incorporated by reference, see §63.14), or other authorized entity as determined by the Reliability Coordinator, has declared an Energy Emergency Alert Level 2 as defined in the NERC Reliability Standard EOP-002-3.

(iii) Emergency stationary RICE may be operated for periods where there is a deviation of voltage or frequency of 5 percent or greater below standard voltage or frequency.

(3) Emergency stationary RICE located at major sources of HAP may be operated for up to 50 hours per calendar year in non-emergency situations. The 50 hours of operation in non-emergency situations are counted as part of the 100 hours per calendar year for maintenance and testing and emergency demand response provided in paragraph (f)(2) of this section. The 50 hours per year for non-emergency situations cannot be used for peak shaving or non-emergency demand response, or to generate income for a facility to supply power to an electric grid or otherwise supply power as part of a financial arrangement with another entity.

(4) Emergency stationary RICE located at area sources of HAP may be operated for up to 50 hours per calendar year in non-emergency situations. The 50 hours of operation in non-emergency situations are counted as part of the 100 hours per calendar year for maintenance and testing and emergency demand response provided in paragraph (f)(2) of this section. Except as provided in paragraphs (f)(4)(i) and (ii) of this section, the 50 hours per year for non-emergency situations cannot be used for peak shaving or non-emergency demand response, or to generate income for a facility to an electric grid or otherwise supply power as part of a financial arrangement with another entity.

(i) Prior to May 3, 2014, the 50 hours per year for non-emergency situations can be used for peak shaving or non-emergency demand response to generate income for a facility, or to otherwise supply power as part of a financial arrangement with another entity if the engine is operated as part of a peak shaving (load management program) with the local distribution system operator and the power is provided only to the facility itself or to support the local distribution system.

(ii) The 50 hours per year for non-emergency situations can be used to supply power as part of a financial arrangement with another entity if all of the following conditions are met:

(A) The engine is dispatched by the local balancing authority or local transmission and distribution system operator.

(B) The dispatch is intended to mitigate local transmission and/or distribution limitations so as to avert potential voltage collapse or line overloads that could lead to the interruption of power supply in a local area or region.

(C) The dispatch follows reliability, emergency operation or similar protocols that follow specific NERC, regional, state, public utility commission or local standards or guidelines.

(D) The power is provided only to the facility itself or to support the local transmission and distribution system.

(E) The owner or operator identifies and records the entity that dispatches the engine and the specific NERC, regional, state, public utility commission or local standards or guidelines that are being followed for dispatching the engine. The local balancing authority or local transmission and distribution system operator may keep these records on behalf of the engine owner or operator.

[69 FR 33506, June 15, 2004, as amended at 71 FR 20467, Apr. 20, 2006; 73 FR 3606, Jan. 18, 2008; 75 FR 9676, Mar. 3, 2010; 75 FR 51591, Aug. 20, 2010; 78 FR 6704, Jan. 30, 2013]

[↑ Back to Top](#)

## **Notifications, Reports, and Records**

[↑ Back to Top](#)

### **§63.6645 What notifications must I submit and when?**

(a) You must submit all of the notifications in §§63.7(b) and (c), 63.8(e), (f)(4) and (f)(6), 63.9(b) through (e), and (g) and (h) that apply to you by the dates specified if you own or operate any of the following;

(1) An existing stationary RICE with a site rating of less than or equal to 500 brake HP located at a major source of HAP emissions.

(2) An existing stationary RICE located at an area source of HAP emissions.

(3) A stationary RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions.

(4) A new or reconstructed 4SLB stationary RICE with a site rating of greater than or equal to 250 HP located at a major source of HAP emissions.

(5) This requirement does not apply if you own or operate an existing stationary RICE less than 100 HP, an existing stationary emergency RICE, or an existing stationary RICE that is not subject to any numerical emission standards.

(b) As specified in §63.9(b)(2), if you start up your stationary RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions before the effective date of this subpart, you must submit an Initial Notification not later than December 13, 2004.

(c) If you start up your new or reconstructed stationary RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions on or after August 16, 2004, you must submit an Initial Notification not later than 120 days after you become subject to this subpart.

(d) As specified in §63.9(b)(2), if you start up your stationary RICE with a site rating of equal to or less than 500 brake HP located at a major source of HAP emissions before the effective date of this subpart and you are required to submit an initial notification, you must submit an Initial Notification not later than July 16, 2008.

(e) If you start up your new or reconstructed stationary RICE with a site rating of equal to or less than 500 brake HP located at a major source of HAP emissions on or after March 18, 2008 and you are required to submit an initial notification, you must submit an Initial Notification not later than 120 days after you become subject to this subpart.

(f) If you are required to submit an Initial Notification but are otherwise not affected by the requirements of this subpart, in accordance with §63.6590(b), your notification should include the information in §63.9(b)(2)(i) through (v), and a statement that your stationary RICE has no additional requirements and explain the basis of the exclusion (for example, that it operates exclusively as an emergency stationary RICE if it has a site rating of more than 500 brake HP located at a major source of HAP emissions).

(g) If you are required to conduct a performance test, you must submit a Notification of Intent to conduct a performance test at least 60 days before the performance test is scheduled to begin as required in §63.7(b)(1).

(h) If you are required to conduct a performance test or other initial compliance demonstration as specified in Tables 4 and 5 to this subpart, you must submit a Notification of Compliance Status according to §63.9(h)(2)(ii).

(1) For each initial compliance demonstration required in Table 5 to this subpart that does not include a performance test, you must submit the Notification of Compliance Status before the close of business on the 30th day following the completion of the initial compliance demonstration.

(2) For each initial compliance demonstration required in Table 5 to this subpart that includes a performance test conducted according to the requirements in Table 3 to this subpart, you must submit the Notification of Compliance Status, including the performance test results, before the close of business on the 60th day following the completion of the performance test according to §63.10(d)(2).

(i) If you own or operate an existing non-emergency CI RICE with a site rating of more than 300 HP located at an area source of HAP emissions that is certified to the Tier 1 or Tier 2 emission standards in Table 1 of 40 CFR

89.112 and subject to an enforceable state or local standard requiring engine replacement and you intend to meet management practices rather than emission limits, as specified in §63.6603(d), you must submit a notification by March 3, 2013, stating that you intend to use the provision in §63.6603(d) and identifying the state or local regulation that the engine is subject to.

[73 FR 3606, Jan. 18, 2008, as amended at 75 FR 9677, Mar. 3, 2010; 75 FR 51591, Aug. 20, 2010; 78 FR 6705, Jan. 30, 2013]

[↑ Back to Top](#)

### **§63.6650 What reports must I submit and when?**

(a) You must submit each report in Table 7 of this subpart that applies to you.

(b) Unless the Administrator has approved a different schedule for submission of reports under §63.10(a), you must submit each report by the date in Table 7 of this subpart and according to the requirements in paragraphs (b)(1) through (b)(9) of this section.

(1) For semiannual Compliance reports, the first Compliance report must cover the period beginning on the compliance date that is specified for your affected source in §63.6595 and ending on June 30 or December 31, whichever date is the first date following the end of the first calendar half after the compliance date that is specified for your source in §63.6595.

(2) For semiannual Compliance reports, the first Compliance report must be postmarked or delivered no later than July 31 or January 31, whichever date follows the end of the first calendar half after the compliance date that is specified for your affected source in §63.6595.

(3) For semiannual Compliance reports, each subsequent Compliance report must cover the semiannual reporting period from January 1 through June 30 or the semiannual reporting period from July 1 through December 31.

(4) For semiannual Compliance reports, each subsequent Compliance report must be postmarked or delivered no later than July 31 or January 31, whichever date is the first date following the end of the semiannual reporting period.

(5) For each stationary RICE that is subject to permitting regulations pursuant to 40 CFR part 70 or 71, and if the permitting authority has established dates for submitting semiannual reports pursuant to 40 CFR 70.6(a)(3)(iii)(A) or 40 CFR 71.6 (a)(3)(iii)(A), you may submit the first and subsequent Compliance reports according to the dates the permitting authority has established instead of according to the dates in paragraphs (b)(1) through (b)(4) of this section.

(6) For annual Compliance reports, the first Compliance report must cover the period beginning on the compliance date that is specified for your affected source in §63.6595 and ending on December 31.

(7) For annual Compliance reports, the first Compliance report must be postmarked or delivered no later than January 31 following the end of the first calendar year after the compliance date that is specified for your affected source in §63.6595.

(8) For annual Compliance reports, each subsequent Compliance report must cover the annual reporting period from January 1 through December 31.

(9) For annual Compliance reports, each subsequent Compliance report must be postmarked or delivered no later than January 31.

(c) The Compliance report must contain the information in paragraphs (c)(1) through (6) of this section.

(1) Company name and address.

(2) Statement by a responsible official, with that official's name, title, and signature, certifying the accuracy of the content of the report.

(3) Date of report and beginning and ending dates of the reporting period.

(4) If you had a malfunction during the reporting period, the compliance report must include the number, duration, and a brief description for each type of malfunction which occurred during the reporting period and which caused or may have caused any applicable emission limitation to be exceeded. The report must also include a description of actions taken by an owner or operator during a malfunction of an affected source to minimize emissions in accordance with §63.6605(b), including actions taken to correct a malfunction.

(5) If there are no deviations from any emission or operating limitations that apply to you, a statement that there were no deviations from the emission or operating limitations during the reporting period.

(6) If there were no periods during which the continuous monitoring system (CMS), including CEMS and CPMS, was out-of-control, as specified in §63.8(c)(7), a statement that there were no periods during which the CMS was out-of-control during the reporting period.

(d) For each deviation from an emission or operating limitation that occurs for a stationary RICE where you are not using a CMS to comply with the emission or operating limitations in this subpart, the Compliance report must contain the information in paragraphs (c)(1) through (4) of this section and the information in paragraphs (d)(1) and (2) of this section.

(1) The total operating time of the stationary RICE at which the deviation occurred during the reporting period.

(2) Information on the number, duration, and cause of deviations (including unknown cause, if applicable), as applicable, and the corrective action taken.

(e) For each deviation from an emission or operating limitation occurring for a stationary RICE where you are using a CMS to comply with the emission and operating limitations in this subpart, you must include information in paragraphs (c)(1) through (4) and (e)(1) through (12) of this section.

(1) The date and time that each malfunction started and stopped.

(2) The date, time, and duration that each CMS was inoperative, except for zero (low-level) and high-level checks.

(3) The date, time, and duration that each CMS was out-of-control, including the information in §63.8(c)(8).

(4) The date and time that each deviation started and stopped, and whether each deviation occurred during a period of malfunction or during another period.

(5) A summary of the total duration of the deviation during the reporting period, and the total duration as a percent of the total source operating time during that reporting period.

(6) A breakdown of the total duration of the deviations during the reporting period into those that are due to control equipment problems, process problems, other known causes, and other unknown causes.

(7) A summary of the total duration of CMS downtime during the reporting period, and the total duration of CMS downtime as a percent of the total operating time of the stationary RICE at which the CMS downtime occurred during that reporting period.

(8) An identification of each parameter and pollutant (CO or formaldehyde) that was monitored at the stationary RICE.

(9) A brief description of the stationary RICE.

(10) A brief description of the CMS.

(11) The date of the latest CMS certification or audit.

(12) A description of any changes in CMS, processes, or controls since the last reporting period.

(f) Each affected source that has obtained a title V operating permit pursuant to 40 CFR part 70 or 71 must report all deviations as defined in this subpart in the semiannual monitoring report required by 40 CFR 70.6 (a)(3)(iii)(A) or 40 CFR 71.6(a)(3)(iii)(A). If an affected source submits a Compliance report pursuant to Table 7 of this subpart along with, or as part of, the semiannual monitoring report required by 40 CFR 70.6(a)(3)(iii)(A) or 40 CFR 71.6(a)(3)(iii)(A), and the Compliance report includes all required information concerning deviations from any emission or operating limitation in this subpart, submission of the Compliance report shall be deemed to satisfy any obligation to report the same deviations in the semiannual monitoring report. However, submission of a Compliance report shall not otherwise affect any obligation the affected source may have to report deviations from permit requirements to the permit authority.

(g) If you are operating as a new or reconstructed stationary RICE which fires landfill gas or digester gas equivalent to 10 percent or more of the gross heat input on an annual basis, you must submit an annual report according to Table 7 of this subpart by the date specified unless the Administrator has approved a different schedule, according to the information described in paragraphs (b)(1) through (b)(5) of this section. You must report the data specified in (g)(1) through (g)(3) of this section.

(1) Fuel flow rate of each fuel and the heating values that were used in your calculations. You must also demonstrate that the percentage of heat input provided by landfill gas or digester gas is equivalent to 10 percent or more of the total fuel consumption on an annual basis.

(2) The operating limits provided in your federally enforceable permit, and any deviations from these limits.

(3) Any problems or errors suspected with the meters.

(h) If you own or operate an emergency stationary RICE with a site rating of more than 100 brake HP that operates or is contractually obligated to be available for more than 15 hours per calendar year for the purposes specified in §63.6640(f)(2)(ii) and (iii) or that operates for the purpose specified in §63.6640(f)(4)(ii), you must submit an annual report according to the requirements in paragraphs (h)(1) through (3) of this section.

(1) The report must contain the following information:

(i) Company name and address where the engine is located.

(ii) Date of the report and beginning and ending dates of the reporting period.

(iii) Engine site rating and model year.

(iv) Latitude and longitude of the engine in decimal degrees reported to the fifth decimal place.



(v) Hours operated for the purposes specified in §63.6640(f)(2)(ii) and (iii), including the date, start time, and end time for engine operation for the purposes specified in §63.6640(f)(2)(ii) and (iii).

(vi) Number of hours the engine is contractually obligated to be available for the purposes specified in §63.6640(f)(2)(ii) and (iii).

(vii) Hours spent for operation for the purpose specified in §63.6640(f)(4)(ii), including the date, start time, and end time for engine operation for the purposes specified in §63.6640(f)(4)(ii). The report must also identify the entity that dispatched the engine and the situation that necessitated the dispatch of the engine.

(viii) If there were no deviations from the fuel requirements in §63.6604 that apply to the engine (if any), a statement that there were no deviations from the fuel requirements during the reporting period.

(ix) If there were deviations from the fuel requirements in §63.6604 that apply to the engine (if any), information on the number, duration, and cause of deviations, and the corrective action taken.

(2) The first annual report must cover the calendar year 2015 and must be submitted no later than March 31, 2016. Subsequent annual reports for each calendar year must be submitted no later than March 31 of the following calendar year.

(3) The annual report must be submitted electronically using the subpart specific reporting form in the Compliance and Emissions Data Reporting Interface (CEDRI) that is accessed through EPA's Central Data Exchange (CDX) ([www.epa.gov/cdx](http://www.epa.gov/cdx)). However, if the reporting form specific to this subpart is not available in CEDRI at the time that the report is due, the written report must be submitted to the Administrator at the appropriate address listed in §63.13.

[69 FR 33506, June 15, 2004, as amended at 75 FR 9677, Mar. 3, 2010; 78 FR 6705, Jan. 30, 2013]

[↑ Back to Top](#)

### **§63.6655 What records must I keep?**

(a) If you must comply with the emission and operating limitations, you must keep the records described in paragraphs (a)(1) through (a)(5), (b)(1) through (b)(3) and (c) of this section.

(1) A copy of each notification and report that you submitted to comply with this subpart, including all documentation supporting any Initial Notification or Notification of Compliance Status that you submitted, according to the requirement in §63.10(b)(2)(xiv).

(2) Records of the occurrence and duration of each malfunction of operation (*i.e.*, process equipment) or the air pollution control and monitoring equipment.

(3) Records of performance tests and performance evaluations as required in §63.10(b)(2)(viii).

(4) Records of all required maintenance performed on the air pollution control and monitoring equipment.

(5) Records of actions taken during periods of malfunction to minimize emissions in accordance with §63.6605(b), including corrective actions to restore malfunctioning process and air pollution control and monitoring equipment to its normal or usual manner of operation.

(b) For each CEMS or CPMS, you must keep the records listed in paragraphs (b)(1) through (3) of this section.

(1) Records described in §63.10(b)(2)(vi) through (xi).

- (2) Previous (*i.e.*, superseded) versions of the performance evaluation plan as required in §63.8(d)(3).
- (3) Requests for alternatives to the relative accuracy test for CEMS or CPMS as required in §63.8(f)(6)(i), if applicable.
- (c) If you are operating a new or reconstructed stationary RICE which fires landfill gas or digester gas equivalent to 10 percent or more of the gross heat input on an annual basis, you must keep the records of your daily fuel usage monitors.
- (d) You must keep the records required in Table 6 of this subpart to show continuous compliance with each emission or operating limitation that applies to you.
- (e) You must keep records of the maintenance conducted on the stationary RICE in order to demonstrate that you operated and maintained the stationary RICE and after-treatment control device (if any) according to your own maintenance plan if you own or operate any of the following stationary RICE;
- (1) An existing stationary RICE with a site rating of less than 100 brake HP located at a major source of HAP emissions.
  - (2) An existing stationary emergency RICE.
  - (3) An existing stationary RICE located at an area source of HAP emissions subject to management practices as shown in Table 2d to this subpart.
- (f) If you own or operate any of the stationary RICE in paragraphs (f)(1) through (2) of this section, you must keep records of the hours of operation of the engine that is recorded through the non-resettable hour meter. The owner or operator must document how many hours are spent for emergency operation, including what classified the operation as emergency and how many hours are spent for non-emergency operation. If the engine is used for the purposes specified in §63.6640(f)(2)(ii) or (iii) or §63.6640(f)(4)(ii), the owner or operator must keep records of the notification of the emergency situation, and the date, start time, and end time of engine operation for these purposes.
- (1) An existing emergency stationary RICE with a site rating of less than or equal to 500 brake HP located at a major source of HAP emissions that does not meet the standards applicable to non-emergency engines.
  - (2) An existing emergency stationary RICE located at an area source of HAP emissions that does not meet the standards applicable to non-emergency engines.

[69 FR 33506, June 15, 2004, as amended at 75 FR 9678, Mar. 3, 2010; 75 FR 51592, Aug. 20, 2010; 78 FR 6706, Jan. 30, 2013]

[↑ Back to Top](#)

### **§63.6660 In what form and how long must I keep my records?**

- (a) Your records must be in a form suitable and readily available for expeditious review according to §63.10(b)(1).
- (b) As specified in §63.10(b)(1), you must keep each record for 5 years following the date of each occurrence, measurement, maintenance, corrective action, report, or record.
- (c) You must keep each record readily accessible in hard copy or electronic form for at least 5 years after the date of each occurrence, measurement, maintenance, corrective action, report, or record, according to §63.10(b)(1).

[69 FR 33506, June 15, 2004, as amended at 75 FR 9678, Mar. 3, 2010]

[↑ Back to Top](#)

## Other Requirements and Information

[↑ Back to Top](#)

### §63.6665 What parts of the General Provisions apply to me?

Table 8 to this subpart shows which parts of the General Provisions in §§63.1 through 63.15 apply to you. If you own or operate a new or reconstructed stationary RICE with a site rating of less than or equal to 500 brake HP located at a major source of HAP emissions (except new or reconstructed 4SLB engines greater than or equal to 250 and less than or equal to 500 brake HP), a new or reconstructed stationary RICE located at an area source of HAP emissions, or any of the following RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions, you do not need to comply with any of the requirements of the General Provisions specified in Table 8: An existing 2SLB stationary RICE, an existing 4SLB stationary RICE, an existing stationary RICE that combusts landfill or digester gas equivalent to 10 percent or more of the gross heat input on an annual basis, an existing emergency stationary RICE, or an existing limited use stationary RICE. If you own or operate any of the following RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions, you do not need to comply with the requirements in the General Provisions specified in Table 8 except for the initial notification requirements: A new stationary RICE that combusts landfill gas or digester gas equivalent to 10 percent or more of the gross heat input on an annual basis, a new emergency stationary RICE, or a new limited use stationary RICE.

[75 FR 9678, Mar. 3, 2010]

[↑ Back to Top](#)

### §63.6670 Who implements and enforces this subpart?

(a) This subpart is implemented and enforced by the U.S. EPA, or a delegated authority such as your State, local, or tribal agency. If the U.S. EPA Administrator has delegated authority to your State, local, or tribal agency, then that agency (as well as the U.S. EPA) has the authority to implement and enforce this subpart. You should contact your U.S. EPA Regional Office to find out whether this subpart is delegated to your State, local, or tribal agency.

(b) In delegating implementation and enforcement authority of this subpart to a State, local, or tribal agency under 40 CFR part 63, subpart E, the authorities contained in paragraph (c) of this section are retained by the Administrator of the U.S. EPA and are not transferred to the State, local, or tribal agency.

(c) The authorities that will not be delegated to State, local, or tribal agencies are:

(1) Approval of alternatives to the non-opacity emission limitations and operating limitations in §63.6600 under §63.6(g).

(2) Approval of major alternatives to test methods under §63.7(e)(2)(ii) and (f) and as defined in §63.90.

(3) Approval of major alternatives to monitoring under §63.8(f) and as defined in §63.90.

(4) Approval of major alternatives to recordkeeping and reporting under §63.10(f) and as defined in §63.90.

(5) Approval of a performance test which was conducted prior to the effective date of the rule, as specified in §63.6610(b).

[↑ Back to Top](#)

### §63.6675 What definitions apply to this subpart?

Terms used in this subpart are defined in the Clean Air Act (CAA); in 40 CFR 63.2, the General Provisions of this part; and in this section as follows:

*Alaska Railbelt Grid* means the service areas of the six regulated public utilities that extend from Fairbanks to Anchorage and the Kenai Peninsula. These utilities are Golden Valley Electric Association; Chugach Electric Association; Matanuska Electric Association; Homer Electric Association; Anchorage Municipal Light & Power; and the City of Seward Electric System.

*Area source* means any stationary source of HAP that is not a major source as defined in part 63.

*Associated equipment* as used in this subpart and as referred to in section 112(n)(4) of the CAA, means equipment associated with an oil or natural gas exploration or production well, and includes all equipment from the well bore to the point of custody transfer, except glycol dehydration units, storage vessels with potential for flash emissions, combustion turbines, and stationary RICE.

*Backup power for renewable energy* means an engine that provides backup power to a facility that generates electricity from renewable energy resources, as that term is defined in Alaska Statute 42.45.045(1)(5) (incorporated by reference, see §63.14).

*Black start engine* means an engine whose only purpose is to start up a combustion turbine.

*CAA* means the Clean Air Act (42 U.S.C. 7401 *et seq.*, as amended by Public Law 101-549, 104 Stat. 2399).

*Commercial emergency stationary RICE* means an emergency stationary RICE used in commercial establishments such as office buildings, hotels, stores, telecommunications facilities, restaurants, financial institutions such as banks, doctor's offices, and sports and performing arts facilities.

*Compression ignition* means relating to a type of stationary internal combustion engine that is not a spark ignition engine.

*Custody transfer* means the transfer of hydrocarbon liquids or natural gas: After processing and/or treatment in the producing operations, or from storage vessels or automatic transfer facilities or other such equipment, including product loading racks, to pipelines or any other forms of transportation. For the purposes of this subpart, the point at which such liquids or natural gas enters a natural gas processing plant is a point of custody transfer.

*Deviation* means any instance in which an affected source subject to this subpart, or an owner or operator of such a source:

- (1) Fails to meet any requirement or obligation established by this subpart, including but not limited to any emission limitation or operating limitation;
- (2) Fails to meet any term or condition that is adopted to implement an applicable requirement in this subpart and that is included in the operating permit for any affected source required to obtain such a permit; or
- (3) Fails to meet any emission limitation or operating limitation in this subpart during malfunction, regardless or whether or not such failure is permitted by this subpart.
- (4) Fails to satisfy the general duty to minimize emissions established by §63.6(e)(1)(i).

*Diesel engine* means any stationary RICE in which a high boiling point liquid fuel injected into the combustion chamber ignites when the air charge has been compressed to a temperature sufficiently high for auto-ignition. This process is also known as compression ignition.

*Diesel fuel* means any liquid obtained from the distillation of petroleum with a boiling point of approximately 150 to 360 degrees Celsius. One commonly used form is fuel oil number 2. Diesel fuel also includes any non-distillate fuel with comparable physical and chemical properties (e.g. biodiesel) that is suitable for use in compression ignition engines.

*Digester gas* means any gaseous by-product of wastewater treatment typically formed through the anaerobic decomposition of organic waste materials and composed principally of methane and CO<sub>2</sub>.

*Dual-fuel engine* means any stationary RICE in which a liquid fuel (typically diesel fuel) is used for compression ignition and gaseous fuel (typically natural gas) is used as the primary fuel.

*Emergency stationary RICE* means any stationary reciprocating internal combustion engine that meets all of the criteria in paragraphs (1) through (3) of this definition. All emergency stationary RICE must comply with the requirements specified in §63.6640(f) in order to be considered emergency stationary RICE. If the engine does not comply with the requirements specified in §63.6640(f), then it is not considered to be an emergency stationary RICE under this subpart.

(1) The stationary RICE is operated to provide electrical power or mechanical work during an emergency situation. Examples include stationary RICE used to produce power for critical networks or equipment (including power supplied to portions of a facility) when electric power from the local utility (or the normal power source, if the facility runs on its own power production) is interrupted, or stationary RICE used to pump water in the case of fire or flood, etc.

(2) The stationary RICE is operated under limited circumstances for situations not included in paragraph (1) of this definition, as specified in §63.6640(f).

(3) The stationary RICE operates as part of a financial arrangement with another entity in situations not included in paragraph (1) of this definition only as allowed in §63.6640(f)(2)(ii) or (iii) and §63.6640(f)(4)(i) or (ii).

*Engine startup* means the time from initial start until applied load and engine and associated equipment reaches steady state or normal operation. For stationary engine with catalytic controls, engine startup means the time from initial start until applied load and engine and associated equipment, including the catalyst, reaches steady state or normal operation.

*Four-stroke engine* means any type of engine which completes the power cycle in two crankshaft revolutions, with intake and compression strokes in the first revolution and power and exhaust strokes in the second revolution.

*Gaseous fuel* means a material used for combustion which is in the gaseous state at standard atmospheric temperature and pressure conditions.

*Gasoline* means any fuel sold in any State for use in motor vehicles and motor vehicle engines, or nonroad or stationary engines, and commonly or commercially known or sold as gasoline.

*Glycol dehydration unit* means a device in which a liquid glycol (including, but not limited to, ethylene glycol, diethylene glycol, or triethylene glycol) absorbent directly contacts a natural gas stream and absorbs water in a contact tower or absorption column (absorber). The glycol contacts and absorbs water vapor and other gas stream constituents from the natural gas and becomes “rich” glycol. This glycol is then regenerated in the glycol dehydration unit reboiler. The “lean” glycol is then recycled.

*Hazardous air pollutants (HAP)* means any air pollutants listed in or pursuant to section 112(b) of the CAA.

*Institutional emergency stationary RICE* means an emergency stationary RICE used in institutional establishments such as medical centers, nursing homes, research centers, institutions of higher education, correctional facilities, elementary and secondary schools, libraries, religious establishments, police stations, and fire stations.

*ISO standard day conditions* means 288 degrees Kelvin (15 degrees Celsius), 60 percent relative humidity and 101.3 kilopascals pressure.

*Landfill gas* means a gaseous by-product of the land application of municipal refuse typically formed through the anaerobic decomposition of waste materials and composed principally of methane and CO<sub>2</sub>.

*Lean burn engine* means any two-stroke or four-stroke spark ignited engine that does not meet the definition of a rich burn engine.

*Limited use stationary RICE* means any stationary RICE that operates less than 100 hours per year.

*Liquefied petroleum gas* means any liquefied hydrocarbon gas obtained as a by-product in petroleum refining of natural gas production.

*Liquid fuel* means any fuel in liquid form at standard temperature and pressure, including but not limited to diesel, residual/crude oil, kerosene/naphtha (jet fuel), and gasoline.

*Major Source*, as used in this subpart, shall have the same meaning as in §63.2, except that:

- (1) Emissions from any oil or gas exploration or production well (with its associated equipment (as defined in this section)) and emissions from any pipeline compressor station or pump station shall not be aggregated with emissions from other similar units, to determine whether such emission points or stations are major sources, even when emission points are in a contiguous area or under common control;
- (2) For oil and gas production facilities, emissions from processes, operations, or equipment that are not part of the same oil and gas production facility, as defined in §63.1271 of subpart HHH of this part, shall not be aggregated;
- (3) For production field facilities, only HAP emissions from glycol dehydration units, storage vessel with the potential for flash emissions, combustion turbines and reciprocating internal combustion engines shall be aggregated for a major source determination; and
- (4) Emissions from processes, operations, and equipment that are not part of the same natural gas transmission and storage facility, as defined in §63.1271 of subpart HHH of this part, shall not be aggregated.

*Malfunction* means any sudden, infrequent, and not reasonably preventable failure of air pollution control equipment, process equipment, or a process to operate in a normal or usual manner which causes, or has the potential to cause, the emission limitations in an applicable standard to be exceeded. Failures that are caused in part by poor maintenance or careless operation are not malfunctions.

*Natural gas* means a naturally occurring mixture of hydrocarbon and non-hydrocarbon gases found in geologic formations beneath the Earth's surface, of which the principal constituent is methane. Natural gas may be field or pipeline quality.

*Non-selective catalytic reduction (NSCR)* means an add-on catalytic nitrogen oxides (NO<sub>x</sub>) control device for rich burn engines that, in a two-step reaction, promotes the conversion of excess oxygen, NO<sub>x</sub>, CO, and volatile organic compounds (VOC) into CO<sub>2</sub>, nitrogen, and water.

*Oil and gas production facility* as used in this subpart means any grouping of equipment where hydrocarbon liquids are processed, upgraded (*i.e.*, remove impurities or other constituents to meet contract specifications), or stored prior to the point of custody transfer; or where natural gas is processed, upgraded, or stored prior to entering the natural gas transmission and storage source category. For purposes of a major source determination, facility (including a building, structure, or installation) means oil and natural gas production and processing equipment that is located within the boundaries of an individual surface site as defined in this section. Equipment that is part of a facility will typically be located within close proximity to other equipment located at the same facility. Pieces of production equipment or groupings of equipment located on different oil and gas leases, mineral fee tracts, lease tracts, subsurface or surface unit areas, surface fee tracts, surface lease tracts, or separate surface sites, whether or not connected by a road, waterway, power line or pipeline, shall not be considered part of the same facility. Examples of facilities in the oil and natural gas production source category include, but are not limited to, well sites, satellite tank batteries, central tank batteries, a compressor station that transports natural gas to a natural gas processing plant, and natural gas processing plants.

*Oxidation catalyst* means an add-on catalytic control device that controls CO and VOC by oxidation.

*Peaking unit or engine* means any standby engine intended for use during periods of high demand that are not emergencies.

*Percent load* means the fractional power of an engine compared to its maximum manufacturer's design capacity at engine site conditions. Percent load may range between 0 percent to above 100 percent.

*Potential to emit* means the maximum capacity of a stationary source to emit a pollutant under its physical and operational design. Any physical or operational limitation on the capacity of the stationary source to emit a pollutant, including air pollution control equipment and restrictions on hours of operation or on the type or amount of material combusted, stored, or processed, shall be treated as part of its design if the limitation or the effect it would have on emissions is federally enforceable. For oil and natural gas production facilities subject to subpart HH of this part, the potential to emit provisions in §63.760(a) may be used. For natural gas transmission and storage facilities subject to subpart HHH of this part, the maximum annual facility gas throughput for storage facilities may be determined according to §63.1270(a)(1) and the maximum annual throughput for transmission facilities may be determined according to §63.1270(a)(2).

*Production field facility* means those oil and gas production facilities located prior to the point of custody transfer.

*Production well* means any hole drilled in the earth from which crude oil, condensate, or field natural gas is extracted.

*Propane* means a colorless gas derived from petroleum and natural gas, with the molecular structure C<sub>3</sub>H<sub>8</sub>.

*Remote stationary RICE* means stationary RICE meeting any of the following criteria:

(1) Stationary RICE located in an offshore area that is beyond the line of ordinary low water along that portion of the coast of the United States that is in direct contact with the open seas and beyond the line marking the seaward limit of inland waters.

(2) Stationary RICE located on a pipeline segment that meets both of the criteria in paragraphs (2)(i) and (ii) of this definition.

(i) A pipeline segment with 10 or fewer buildings intended for human occupancy and no buildings with four or more stories within 220 yards (200 meters) on either side of the centerline of any continuous 1-mile (1.6 kilometers)

length of pipeline. Each separate dwelling unit in a multiple dwelling unit building is counted as a separate building intended for human occupancy.

(ii) The pipeline segment does not lie within 100 yards (91 meters) of either a building or a small, well-defined outside area (such as a playground, recreation area, outdoor theater, or other place of public assembly) that is occupied by 20 or more persons on at least 5 days a week for 10 weeks in any 12-month period. The days and weeks need not be consecutive. The building or area is considered occupied for a full day if it is occupied for any portion of the day.

(iii) For purposes of this paragraph (2), the term pipeline segment means all parts of those physical facilities through which gas moves in transportation, including but not limited to pipe, valves, and other appurtenance attached to pipe, compressor units, metering stations, regulator stations, delivery stations, holders, and fabricated assemblies. Stationary RICE located within 50 yards (46 meters) of the pipeline segment providing power for equipment on a pipeline segment are part of the pipeline segment. Transportation of gas means the gathering, transmission, or distribution of gas by pipeline, or the storage of gas. A building is intended for human occupancy if its primary use is for a purpose involving the presence of humans.

(3) Stationary RICE that are not located on gas pipelines and that have 5 or fewer buildings intended for human occupancy and no buildings with four or more stories within a 0.25 mile radius around the engine. A building is intended for human occupancy if its primary use is for a purpose involving the presence of humans.

*Residential emergency stationary RICE* means an emergency stationary RICE used in residential establishments such as homes or apartment buildings.

*Responsible official* means responsible official as defined in 40 CFR 70.2.

*Rich burn engine* means any four-stroke spark ignited engine where the manufacturer's recommended operating air/fuel ratio divided by the stoichiometric air/fuel ratio at full load conditions is less than or equal to 1.1. Engines originally manufactured as rich burn engines, but modified prior to December 19, 2002 with passive emission control technology for NO<sub>x</sub> (such as pre-combustion chambers) will be considered lean burn engines. Also, existing engines where there are no manufacturer's recommendations regarding air/fuel ratio will be considered a rich burn engine if the excess oxygen content of the exhaust at full load conditions is less than or equal to 2 percent.

*Site-rated HP* means the maximum manufacturer's design capacity at engine site conditions.

*Spark ignition* means relating to either: A gasoline-fueled engine; or any other type of engine with a spark plug (or other sparking device) and with operating characteristics significantly similar to the theoretical Otto combustion cycle. Spark ignition engines usually use a throttle to regulate intake air flow to control power during normal operation. Dual-fuel engines in which a liquid fuel (typically diesel fuel) is used for CI and gaseous fuel (typically natural gas) is used as the primary fuel at an annual average ratio of less than 2 parts diesel fuel to 100 parts total fuel on an energy equivalent basis are spark ignition engines.

*Stationary reciprocating internal combustion engine (RICE)* means any reciprocating internal combustion engine which uses reciprocating motion to convert heat energy into mechanical work and which is not mobile. Stationary RICE differ from mobile RICE in that a stationary RICE is not a non-road engine as defined at 40 CFR 1068.30, and is not used to propel a motor vehicle or a vehicle used solely for competition.

*Stationary RICE test cell/stand* means an engine test cell/stand, as defined in subpart P of this part, that tests stationary RICE.

*Stoichiometric* means the theoretical air-to-fuel ratio required for complete combustion.



*Storage vessel with the potential for flash emissions* means any storage vessel that contains a hydrocarbon liquid with a stock tank gas-to-oil ratio equal to or greater than 0.31 cubic meters per liter and an American Petroleum Institute gravity equal to or greater than 40 degrees and an actual annual average hydrocarbon liquid throughput equal to or greater than 79,500 liters per day. Flash emissions occur when dissolved hydrocarbons in the fluid evolve from solution when the fluid pressure is reduced.

*Subpart* means 40 CFR part 63, subpart ZZZZ.

*Surface site* means any combination of one or more graded pad sites, gravel pad sites, foundations, platforms, or the immediate physical location upon which equipment is physically affixed.

*Two-stroke engine* means a type of engine which completes the power cycle in single crankshaft revolution by combining the intake and compression operations into one stroke and the power and exhaust operations into a second stroke. This system requires auxiliary scavenging and inherently runs lean of stoichiometric.

[69 FR 33506, June 15, 2004, as amended at 71 FR 20467, Apr. 20, 2006; 73 FR 3607, Jan. 18, 2008; 75 FR 9679, Mar. 3, 2010; 75 FR 51592, Aug. 20, 2010; 76 FR 12867, Mar. 9, 2011; 78 FR 6706, Jan. 30, 2013]

[↑ Back to Top](#)

**Table 1a to Subpart ZZZZ of Part 63—Emission Limitations for Existing, New, and Reconstructed Spark Ignition, 4SRB Stationary RICE >500 HP Located at a Major Source of HAP Emissions**

As stated in §§63.6600 and 63.6640, you must comply with the following emission limitations at 100 percent load plus or minus 10 percent for existing, new and reconstructed 4SRB stationary RICE >500 HP located at a major source of HAP emissions:

For each . . .	You must meet the following emission limitation, except during periods of startup . . .	During periods of startup you must . . .
1. 4SRB stationary RICE	a. Reduce formaldehyde emissions by 76 percent or more. If you commenced construction or reconstruction between December 19, 2002 and June 15, 2004, you may reduce formaldehyde emissions by 75 percent or more until June 15, 2007 or	Minimize the engine's time spent at idle and minimize the engine's startup time at startup to a period needed for appropriate and safe loading of the engine, not to exceed 30 minutes, after which time the non-startup emission limitations apply. <sup>1</sup>
	b. Limit the concentration of formaldehyde in the stationary RICE exhaust to 350 ppbvd or less at 15 percent O <sub>2</sub>	

<sup>1</sup> Sources can petition the Administrator pursuant to the requirements of 40 CFR 63.6(g) for alternative work practices.

[75 FR 9679, Mar. 3, 2010, as amended at 75 FR 51592, Aug. 20, 2010]

[↑ Back to Top](#)

**Table 1b to Subpart ZZZZ of Part 63—Operating Limitations for Existing, New, and Reconstructed SI 4SRB Stationary RICE >500 HP Located at a Major Source of HAP Emissions**

As stated in §§63.6600, 63.6603, 63.6630 and 63.6640, you must comply with the following operating limitations for existing, new and reconstructed 4SRB stationary RICE >500 HP located at a major source of HAP emissions:

For each . . .	You must meet the following operating limitation, except during periods of startup . . .
1. existing, new and reconstructed 4SRB stationary RICE >500 HP located at a major source of HAP emissions complying with the requirement to reduce formaldehyde emissions by 76 percent or more (or by 75 percent or more, if applicable) and using NSCR; or existing, new and reconstructed 4SRB stationary RICE >500 HP located at a major source of HAP emissions complying with the requirement to limit the concentration of formaldehyde in the stationary RICE exhaust to 350 ppbvd or less at 15 percent O <sub>2</sub> and using NSCR;	a. maintain your catalyst so that the pressure drop across the catalyst does not change by more than 2 inches of water at 100 percent load plus or minus 10 percent from the pressure drop across the catalyst measured during the initial performance test; and b. maintain the temperature of your stationary RICE exhaust so that the catalyst inlet temperature is greater than or equal to 750 °F and less than or equal to 1250 °F. <sup>1</sup>
2. existing, new and reconstructed 4SRB stationary RICE >500 HP located at a major source of HAP emissions complying with the requirement to reduce formaldehyde emissions by 76 percent or more (or by 75 percent or more, if applicable) and not using NSCR; or	Comply with any operating limitations approved by the Administrator.
existing, new and reconstructed 4SRB stationary RICE >500 HP located at a major source of HAP emissions complying with the requirement to limit the concentration of formaldehyde in the stationary RICE exhaust to 350 ppbvd or less at 15 percent O <sub>2</sub> and not using NSCR.	

<sup>1</sup>Sources can petition the Administrator pursuant to the requirements of 40 CFR 63.8(f) for a different temperature range.

[78 FR 6706, Jan. 30, 2013]

[↑ Back to Top](#)

**Table 2a to Subpart ZZZZ of Part 63—Emission Limitations for New and Reconstructed 2SLB and Compression Ignition Stationary RICE >500 HP and New and Reconstructed 4SLB Stationary RICE ≥250 HP Located at a Major Source of HAP Emissions**

As stated in §§63.6600 and 63.6640, you must comply with the following emission limitations for new and reconstructed lean burn and new and reconstructed compression ignition stationary RICE at 100 percent load plus or minus 10 percent:

For each . . .	You must meet the following emission limitation, except during periods of startup . . .	During periods of startup you must . . .

1. 2SLB stationary RICE	a. Reduce CO emissions by 58 percent or more; or b. Limit concentration of formaldehyde in the stationary RICE exhaust to 12 ppmvd or less at 15 percent O <sub>2</sub> . If you commenced construction or reconstruction between December 19, 2002 and June 15, 2004, you may limit concentration of formaldehyde to 17 ppmvd or less at 15 percent O <sub>2</sub> until June 15, 2007	Minimize the engine's time spent at idle and minimize the engine's startup time at startup to a period needed for appropriate and safe loading of the engine, not to exceed 30 minutes, after which time the non-startup emission limitations apply. <sup>1</sup>
2. 4SLB stationary RICE	a. Reduce CO emissions by 93 percent or more; or	
	b. Limit concentration of formaldehyde in the stationary RICE exhaust to 14 ppmvd or less at 15 percent O <sub>2</sub>	
3. CI stationary RICE	a. Reduce CO emissions by 70 percent or more; or	
	b. Limit concentration of formaldehyde in the stationary RICE exhaust to 580 ppbvd or less at 15 percent O <sub>2</sub>	

<sup>1</sup>Sources can petition the Administrator pursuant to the requirements of 40 CFR 63.6(g) for alternative work practices.

[75 FR 9680, Mar. 3, 2010]

[↑ Back to Top](#)

**Table 2b to Subpart ZZZZ of Part 63—Operating Limitations for New and Reconstructed 2SLB and CI Stationary RICE >500 HP Located at a Major Source of HAP Emissions, New and Reconstructed 4SLB Stationary RICE ≥250 HP Located at a Major Source of HAP Emissions, Existing CI Stationary RICE >500 HP**

As stated in §§63.6600, 63.6601, 63.6603, 63.6630, and 63.6640, you must comply with the following operating limitations for new and reconstructed 2SLB and CI stationary RICE >500 HP located at a major source of HAP emissions; new and reconstructed 4SLB stationary RICE ≥250 HP located at a major source of HAP emissions; and existing CI stationary RICE >500 HP:

<b>For each . . .</b>	<b>You must meet the following operating limitation, except during periods of startup . . .</b>
1. New and reconstructed 2SLB and CI stationary RICE >500 HP located at a major source of HAP emissions and new and reconstructed 4SLB stationary RICE ≥250 HP located at a major source of HAP emissions complying with the requirement to reduce CO emissions and using an oxidation catalyst; and	a. maintain your catalyst so that the pressure drop across the catalyst does not change by more than 2 inches of water at 100 percent load plus or minus 10 percent from the pressure drop across the catalyst that was measured during the initial

New and reconstructed 2SLB and CI stationary RICE >500 HP located at a major source of HAP emissions and new and reconstructed 4SLB stationary RICE $\geq$ 250 HP located at a major source of HAP emissions complying with the requirement to limit the concentration of formaldehyde in the stationary RICE exhaust and using an oxidation catalyst.	performance test; and b. maintain the temperature of your stationary RICE exhaust so that the catalyst inlet temperature is greater than or equal to 450 °F and less than or equal to 1350 °F. <sup>1</sup>
2. Existing CI stationary RICE >500 HP complying with the requirement to limit or reduce the concentration of CO in the stationary RICE exhaust and using an oxidation catalyst	a. maintain your catalyst so that the pressure drop across the catalyst does not change by more than 2 inches of water from the pressure drop across the catalyst that was measured during the initial performance test; and
	b. maintain the temperature of your stationary RICE exhaust so that the catalyst inlet temperature is greater than or equal to 450 °F and less than or equal to 1350 °F. <sup>1</sup>
3. New and reconstructed 2SLB and CI stationary RICE >500 HP located at a major source of HAP emissions and new and reconstructed 4SLB stationary RICE $\geq$ 250 HP located at a major source of HAP emissions complying with the requirement to reduce CO emissions and not using an oxidation catalyst; and	Comply with any operating limitations approved by the Administrator.
New and reconstructed 2SLB and CI stationary RICE >500 HP located at a major source of HAP emissions and new and reconstructed 4SLB stationary RICE $\geq$ 250 HP located at a major source of HAP emissions complying with the requirement to limit the concentration of formaldehyde in the stationary RICE exhaust and not using an oxidation catalyst; and	
existing CI stationary RICE >500 HP complying with the requirement to limit or reduce the concentration of CO in the stationary RICE exhaust and not using an oxidation catalyst.	

<sup>1</sup>Sources can petition the Administrator pursuant to the requirements of 40 CFR 63.8(f) for a different temperature range.

[78 FR 6707, Jan. 30, 2013]

[↑ Back to Top](#)

**Table 2c to Subpart ZZZZ of Part 63—Requirements for Existing Compression Ignition Stationary RICE Located at a Major Source of HAP Emissions and Existing Spark Ignition Stationary RICE  $\leq$ 500 HP Located at a Major Source of HAP Emissions**

As stated in §§63.6600, 63.6602, and 63.6640, you must comply with the following requirements for existing compression ignition stationary RICE located at a major source of HAP emissions and existing spark ignition stationary RICE  $\leq 500$  HP located at a major source of HAP emissions:

For each . . .	You must meet the following requirement, except during periods of startup . . .	During periods of startup you must . . .
1. Emergency stationary CI RICE and black start stationary CI RICE <sup>1</sup>	a. Change oil and filter every 500 hours of operation or annually, whichever comes first. <sup>2</sup> b. Inspect air cleaner every 1,000 hours of operation or annually, whichever comes first, and replace as necessary; c. Inspect all hoses and belts every 500 hours of operation or annually, whichever comes first, and replace as necessary. <sup>3</sup>	Minimize the engine's time spent at idle and minimize the engine's startup time at startup to a period needed for appropriate and safe loading of the engine, not to exceed 30 minutes, after which time the non-startup emission limitations apply. <sup>3</sup>
2. Non-Emergency, non-black start stationary CI RICE <100 HP	a. Change oil and filter every 1,000 hours of operation or annually, whichever comes first. <sup>2</sup> b. Inspect air cleaner every 1,000 hours of operation or annually, whichever comes first, and replace as necessary; c. Inspect all hoses and belts every 500 hours of operation or annually, whichever comes first, and replace as necessary. <sup>3</sup>	
3. Non-Emergency, non-black start CI stationary RICE $100 \leq \text{HP} \leq 300$ HP	Limit concentration of CO in the stationary RICE exhaust to 230 ppmvd or less at 15 percent O <sub>2</sub> .	
4. Non-Emergency, non-black start CI stationary RICE $300 < \text{HP} \leq 500$	a. Limit concentration of CO in the stationary RICE exhaust to 49 ppmvd or less at 15 percent O <sub>2</sub> ; or b. Reduce CO emissions by	

	70 percent or more.	
5. Non-Emergency, non-black start stationary CI RICE >500 HP	a. Limit concentration of CO in the stationary RICE exhaust to 23 ppmvd or less at 15 percent O <sub>2</sub> ; or b. Reduce CO emissions by 70 percent or more.	
6. Emergency stationary SI RICE and black start stationary SI RICE. <sup>1</sup>	a. Change oil and filter every 500 hours of operation or annually, whichever comes first; <sup>2</sup> b. Inspect spark plugs every 1,000 hours of operation or annually, whichever comes first, and replace as necessary; c. Inspect all hoses and belts every 500 hours of operation or annually, whichever comes first, and replace as necessary. <sup>3</sup>	
7. Non-Emergency, non-black start stationary SI RICE <100 HP that are not 2SLB stationary RICE	a. Change oil and filter every 1,440 hours of operation or annually, whichever comes first; <sup>2</sup> b. Inspect spark plugs every 1,440 hours of operation or annually, whichever comes first, and replace as necessary;	
	c. Inspect all hoses and belts every 1,440 hours of operation or annually, whichever comes first, and replace as necessary. <sup>3</sup>	
8. Non-Emergency, non-black start 2SLB stationary SI RICE <100 HP	a. Change oil and filter every 4,320 hours of operation or annually, whichever comes first; <sup>2</sup> b. Inspect spark plugs every 4,320 hours of operation or annually, whichever comes first, and replace as necessary;	

	c. Inspect all hoses and belts every 4,320 hours of operation or annually, whichever comes first, and replace as necessary. <sup>3</sup>	
9. Non-emergency, non-black start 2SLB stationary RICE 100≤HP≤500	Limit concentration of CO in the stationary RICE exhaust to 225 ppmvd or less at 15 percent O <sub>2</sub> .	
10. Non-emergency, non-black start 4SLB stationary RICE 100≤HP≤500	Limit concentration of CO in the stationary RICE exhaust to 47 ppmvd or less at 15 percent O <sub>2</sub> .	
11. Non-emergency, non-black start 4SRB stationary RICE 100≤HP≤500	Limit concentration of formaldehyde in the stationary RICE exhaust to 10.3 ppmvd or less at 15 percent O <sub>2</sub> .	
12. Non-emergency, non-black start stationary RICE 100≤HP≤500 which combusts landfill or digester gas equivalent to 10 percent or more of the gross heat input on an annual basis	Limit concentration of CO in the stationary RICE exhaust to 177 ppmvd or less at 15 percent O <sub>2</sub> .	

<sup>1</sup>If an emergency engine is operating during an emergency and it is not possible to shut down the engine in order to perform the work practice requirements on the schedule required in Table 2c of this subpart, or if performing the work practice on the required schedule would otherwise pose an unacceptable risk under federal, state, or local law, the work practice can be delayed until the emergency is over or the unacceptable risk under federal, state, or local law has abated. The work practice should be performed as soon as practicable after the emergency has ended or the unacceptable risk under federal, state, or local law has abated. Sources must report any failure to perform the work practice on the schedule required and the federal, state or local law under which the risk was deemed unacceptable.

<sup>2</sup>Sources have the option to utilize an oil analysis program as described in §63.6625(i) or (j) in order to extend the specified oil change requirement in Table 2c of this subpart.

<sup>3</sup>Sources can petition the Administrator pursuant to the requirements of 40 CFR 63.6(g) for alternative work practices.

[78 FR 6708, Jan. 30, 2013, as amended at 78 FR 14457, Mar. 6, 2013]

[↑ Back to Top](#)

**Table 2d to Subpart ZZZZ of Part 63—Requirements for Existing Stationary RICE Located at Area Sources of HAP Emissions**

As stated in §§63.6603 and 63.6640, you must comply with the following requirements for existing stationary RICE located at area sources of HAP emissions:

For each . . .	You must meet the following requirement, except during periods of startup . . .	During periods of startup you must . . .
1. Non-Emergency, non-black start CI stationary RICE $\leq 300$ HP	a. Change oil and filter every 1,000 hours of operation or annually, whichever comes first; <sup>1</sup> b. Inspect air cleaner every 1,000 hours of operation or annually, whichever comes first, and replace as necessary; c. Inspect all hoses and belts every 500 hours of operation or annually, whichever comes first, and replace as necessary.	Minimize the engine's time spent at idle and minimize the engine's startup time at startup to a period needed for appropriate and safe loading of the engine, not to exceed 30 minutes, after which time the non-startup emission limitations apply.
2. Non-Emergency, non-black start CI stationary RICE $300 < \text{HP} \leq 500$	a. Limit concentration of CO in the stationary RICE exhaust to 49 ppmvd at 15 percent O <sub>2</sub> ; or	
	b. Reduce CO emissions by 70 percent or more.	
3. Non-Emergency, non-black start CI stationary RICE $> 500$ HP	a. Limit concentration of CO in the stationary RICE exhaust to 23 ppmvd at 15 percent O <sub>2</sub> ; or	
	b. Reduce CO emissions by 70 percent or more.	
4. Emergency stationary CI RICE and black start stationary CI RICE. <sup>2</sup>	a. Change oil and filter every 500 hours of operation or annually, whichever comes first; <sup>1</sup>	
	b. Inspect air cleaner every 1,000 hours of operation or	



	annually, whichever comes first, and replace as necessary; and	
	c. Inspect all hoses and belts every 500 hours of operation or annually, whichever comes first, and replace as necessary.	
5. Emergency stationary SI RICE; black start stationary SI RICE; non-emergency, non-black start 4SLB stationary RICE >500 HP that operate 24 hours or less per calendar year; non-emergency, non-black start 4SRB stationary RICE >500 HP that operate 24 hours or less per calendar year. <sup>2</sup>	a. Change oil and filter every 500 hours of operation or annually, whichever comes first; <sup>1</sup> ; b. Inspect spark plugs every 1,000 hours of operation or annually, whichever comes first, and replace as necessary; and c. Inspect all hoses and belts every 500 hours of operation or annually, whichever comes first, and replace as necessary.	
6. Non-emergency, non-black start 2SLB stationary RICE	a. Change oil and filter every 4,320 hours of operation or annually, whichever comes first; <sup>1</sup>	
	b. Inspect spark plugs every 4,320 hours of operation or annually, whichever comes first, and replace as necessary; and	
	c. Inspect all hoses and belts every 4,320 hours of operation or annually, whichever comes first, and replace as necessary.	
7. Non-emergency, non-black start 4SLB stationary RICE ≤500 HP	a. Change oil and filter every 1,440 hours of operation or annually,	

	whichever comes first; <sup>1</sup>	
	b. Inspect spark plugs every 1,440 hours of operation or annually, whichever comes first, and replace as necessary; and	
	c. Inspect all hoses and belts every 1,440 hours of operation or annually, whichever comes first, and replace as necessary.	
8. Non-emergency, non-black start 4SLB remote stationary RICE >500 HP	a. Change oil and filter every 2,160 hours of operation or annually, whichever comes first; <sup>1</sup>	
	b. Inspect spark plugs every 2,160 hours of operation or annually, whichever comes first, and replace as necessary; and	
	c. Inspect all hoses and belts every 2,160 hours of operation or annually, whichever comes first, and replace as necessary.	
9. Non-emergency, non-black start 4SLB stationary RICE >500 HP that are not remote stationary RICE and that operate more than 24 hours per calendar year	Install an oxidation catalyst to reduce HAP emissions from the stationary RICE.	
10. Non-emergency, non-black start 4SRB stationary RICE ≤500 HP	a. Change oil and filter every 1,440 hours of operation or annually, whichever comes first; <sup>1</sup>	
	b. Inspect spark plugs every 1,440 hours of operation or annually, whichever comes first, and	

	replace as necessary; and	
	c. Inspect all hoses and belts every 1,440 hours of operation or annually, whichever comes first, and replace as necessary.	
11. Non-emergency, non-black start 4SRB remote stationary RICE >500 HP	a. Change oil and filter every 2,160 hours of operation or annually, whichever comes first; <sup>1</sup>	
	b. Inspect spark plugs every 2,160 hours of operation or annually, whichever comes first, and replace as necessary; and	
	c. Inspect all hoses and belts every 2,160 hours of operation or annually, whichever comes first, and replace as necessary.	
12. Non-emergency, non-black start 4SRB stationary RICE >500 HP that are not remote stationary RICE and that operate more than 24 hours per calendar year	Install NSCR to reduce HAP emissions from the stationary RICE.	
13. Non-emergency, non-black start stationary RICE which combusts landfill or digester gas equivalent to 10 percent or more of the gross heat input on an annual basis	a. Change oil and filter every 1,440 hours of operation or annually, whichever comes first; <sup>1</sup> b. Inspect spark plugs every 1,440 hours of operation or annually, whichever comes first, and replace as necessary; and	
	c. Inspect all hoses and belts every 1,440 hours of operation or annually, whichever comes first, and replace as necessary.	

<sup>1</sup>Sources have the option to utilize an oil analysis program as described in §63.6625(i) or (j) in order to extend the specified oil change requirement in Table 2d of this subpart.

<sup>2</sup>If an emergency engine is operating during an emergency and it is not possible to shut down the engine in order to perform the management practice requirements on the schedule required in Table 2d of this subpart, or if performing the management practice on the required schedule would otherwise pose an unacceptable risk under federal, state, or local law, the management practice can be delayed until the emergency is over or the unacceptable risk under federal, state, or local law has abated. The management practice should be performed as soon as practicable after the emergency has ended or the unacceptable risk under federal, state, or local law has abated. Sources must report any failure to perform the management practice on the schedule required and the federal, state or local law under which the risk was deemed unacceptable.

[78 FR 6709, Jan. 30, 2013]

[↑ Back to Top](#)

**Table 3 to Subpart ZZZZ of Part 63—Subsequent Performance Tests**

As stated in §§63.6615 and 63.6620, you must comply with the following subsequent performance test requirements:

<b>For each . . .</b>	<b>Complying with the requirement to . . .</b>	<b>You must . . .</b>
1. New or reconstructed 2SLB stationary RICE >500 HP located at major sources; new or reconstructed 4SLB stationary RICE ≥250 HP located at major sources; and new or reconstructed CI stationary RICE >500 HP located at major sources	Reduce CO emissions and not using a CEMS	Conduct subsequent performance tests semiannually. <sup>1</sup>
2. 4SRB stationary RICE ≥5,000 HP located at major sources	Reduce formaldehyde emissions	Conduct subsequent performance tests semiannually. <sup>1</sup>
3. Stationary RICE >500 HP located at major sources and new or reconstructed 4SLB stationary RICE 250≤HP≤500 located at major sources	Limit the concentration of formaldehyde in the stationary RICE exhaust	Conduct subsequent performance tests semiannually. <sup>1</sup>
4. Existing non-emergency, non-black start CI stationary RICE >500 HP that are not limited use stationary RICE	Limit or reduce CO emissions and not using a CEMS	Conduct subsequent performance tests every 8,760 hours or 3 years, whichever comes first.
5. Existing non-emergency, non-black start CI stationary RICE >500 HP that are limited use stationary RICE	Limit or reduce CO emissions and not using a CEMS	Conduct subsequent performance tests every 8,760 hours or 5 years, whichever comes first.

<sup>1</sup>After you have demonstrated compliance for two consecutive tests, you may reduce the frequency of subsequent performance tests to annually. If the results of any subsequent annual performance test indicate the stationary RICE is not in compliance with the CO or formaldehyde emission limitation, or you deviate from any of your operating limitations, you must resume semiannual performance tests.

[78 FR 6711, Jan. 30, 2013]

[↑ Back to Top](#)

**Table 4 to Subpart ZZZZ of Part 63—Requirements for Performance Tests**

As stated in §§63.6610, 63.6611, 63.6620, and 63.6640, you must comply with the following requirements for performance tests for stationary RICE:

For each . . .	Complying with the requirement to . . .	You must . . .	Using . . .	According to the following requirements . . .
1. 2SLB, 4SLB, and CI stationary RICE	a. reduce CO emissions	i. Select the sampling port location and the number/location of traverse points at the inlet and outlet of the control device; and		(a) For CO and O <sub>2</sub> measurement, ducts ≤6 inches in diameter may be sampled at a single point located at the duct centroid and ducts >6 and ≤12 inches in diameter may be sampled at 3 traverse points located at 16.7, 50.0, and 83.3% of the measurement line ('3-point long line'). If the duct is >12 inches in diameter <i>and</i> the sampling port location meets the two and half-diameter criterion of Section 11.1.1 of Method 1 of 40 CFR part 60, appendix A-1, the duct may be sampled at '3-point long line'; otherwise, conduct the stratification testing and select sampling points according to Section 8.1.2 of Method 7E of 40 CFR part 60, appendix A-4.
		ii. Measure the O <sub>2</sub> at the inlet and outlet of the control device; and	(1) Method 3 or 3A or 3B of 40 CFR part 60, appendix A-2, or ASTM Method D6522-00 (Reapproved 2005) <sup>ac</sup> (heated probe not necessary)	(b) Measurements to determine O <sub>2</sub> must be made at the same time as the measurements for CO concentration.

		iii. Measure the CO at the inlet and the outlet of the control device	(1) ASTM D6522-00 (Reapproved 2005) <sup>abc</sup> (heated probe not necessary) or Method 10 of 40 CFR part 60, appendix A-4	(c) The CO concentration must be at 15 percent O <sub>2</sub> , dry basis.
2. 4SRB stationary RICE	a. reduce formaldehyde emissions	i. Select the sampling port location and the number/location of traverse points at the inlet and outlet of the control device; and		(a) For formaldehyde, O <sub>2</sub> , and moisture measurement, ducts ≤6 inches in diameter may be sampled at a single point located at the duct centroid and ducts >6 and ≤12 inches in diameter may be sampled at 3 traverse points located at 16.7, 50.0, and 83.3% of the measurement line ('3-point long line'). If the duct is >12 inches in diameter <i>and</i> the sampling port location meets the two and half-diameter criterion of Section 11.1.1 of Method 1 of 40 CFR part 60, appendix A, the duct may be sampled at '3-point long line'; otherwise, conduct the stratification testing and select sampling points according to Section 8.1.2 of Method 7E of 40 CFR part 60, appendix A.
		ii. Measure O <sub>2</sub> at the inlet and outlet of the control device; and	(1) Method 3 or 3A or 3B of 40 CFR part 60, appendix A-2, or ASTM Method D6522-00 (Reapproved 2005) <sup>a</sup> (heated probe not necessary)	(a) Measurements to determine O <sub>2</sub> concentration must be made at the same time as the measurements for formaldehyde or THC concentration.
		iii. Measure moisture content at the inlet and outlet of the control device; and	(1) Method 4 of 40 CFR part 60, appendix A-3, or Method 320 of 40 CFR part 63, appendix A, or ASTM D 6348-03 <sup>a</sup>	(a) Measurements to determine moisture content must be made at the same time and location as the measurements for formaldehyde or THC concentration.
		iv. If demonstrating compliance with the formaldehyde percent reduction requirement,	(1) Method 320 or 323 of 40 CFR part 63, appendix A; or ASTM D6348-03 <sup>a</sup> , provided in	(a) Formaldehyde concentration must be at 15 percent O <sub>2</sub> , dry basis. Results of this test consist of the average of the three 1-hour or

		measure formalde-hyde at the inlet and the outlet of the control device	ASTM D6348-03 Annex A5 (Analyte Spiking Technique), the percent R must be greater than or equal to 70 and less than or equal to 130	longer runs.
		v. If demonstrating compliance with the THC percent reduction requirement, measure THC at the inlet and the outlet of the control device	(1) Method 25A, reported as propane, of 40 CFR part 60, appendix A-7	(a) THC concentration must be at 15 percent O <sub>2</sub> , dry basis. Results of this test consist of the average of the three 1-hour or longer runs.
3. Stationary RICE	a. limit the concentra-tion of formalde-hyde or CO in the stationary RICE exhaust	i. Select the sampling port location and the number/location of traverse points at the exhaust of the stationary RICE; and		(a) For formaldehyde, CO, O <sub>2</sub> , and moisture measurement, ducts ≤6 inches in diameter may be sampled at a single point located at the duct centroid and ducts >6 and ≤12 inches in diameter may be sampled at 3 traverse points located at 16.7, 50.0, and 83.3% of the measurement line ('3-point long line'). If the duct is >12 inches in diameter <i>and</i> the sampling port location meets the two and half-diameter criterion of Section 11.1.1 of Method 1 of 40 CFR part 60, appendix A, the duct may be sampled at '3-point long line'; otherwise, conduct the stratification testing and select sampling points according to Section 8.1.2 of Method 7E of 40 CFR part 60, appendix A. If using a control device, the sampling site must be located at the outlet of the control device.
		ii. Determine the O <sub>2</sub> concentration of the stationary RICE exhaust at the sampling port location; and	(1) Method 3 or 3A or 3B of 40 CFR part 60, appendix A-2, or ASTM Method D6522-00 (Reapproved 2005) <sup>a</sup> (heated probe not	(a) Measurements to determine O <sub>2</sub> concentration must be made at the same time and location as the measurements for formaldehyde or CO concentration.

			necessary)	
		iii. Measure moisture content of the stationary RICE exhaust at the sampling port location; and	(1) Method 4 of 40 CFR part 60, appendix A-3, or Method 320 of 40 CFR part 63, appendix A, or ASTM D 6348-03 <sup>a</sup>	(a) Measurements to determine moisture content must be made at the same time and location as the measurements for formaldehyde or CO concentration.
		iv. Measure formaldehyde at the exhaust of the stationary RICE; or	(1) Method 320 or 323 of 40 CFR part 63, appendix A; or ASTM D6348-03 <sup>a</sup> , provided in ASTM D6348-03 Annex A5 (Analyte Spiking Technique), the percent R must be greater than or equal to 70 and less than or equal to 130	(a) Formaldehyde concentration must be at 15 percent O <sub>2</sub> , dry basis. Results of this test consist of the average of the three 1-hour or longer runs.
		v. measure CO at the exhaust of the stationary RICE	(1) Method 10 of 40 CFR part 60, appendix A-4, ASTM Method D6522-00 (2005) <sup>ac</sup> , Method 320 of 40 CFR part 63, appendix A, or ASTM D6348-03 <sup>a</sup>	(a) CO concentration must be at 15 percent O <sub>2</sub> , dry basis. Results of this test consist of the average of the three 1-hour or longer runs.

<sup>a</sup>You may also use Methods 3A and 10 as options to ASTM-D6522-00 (2005). You may obtain a copy of ASTM-D6522-00 (2005) from at least one of the following addresses: American Society for Testing and Materials, 100 Barr Harbor Drive, West Conshohocken, PA 19428-2959, or University Microfilms International, 300 North Zeeb Road, Ann Arbor, MI 48106.

<sup>b</sup>You may obtain a copy of ASTM-D6348-03 from at least one of the following addresses: American Society for Testing and Materials, 100 Barr Harbor Drive, West Conshohocken, PA 19428-2959, or University Microfilms International, 300 North Zeeb Road, Ann Arbor, MI 48106.

[79 FR 11290, Feb. 27, 2014]

[↑ Back to Top](#)

**Table 5 to Subpart ZZZZ of Part 63—Initial Compliance With Emission Limitations, Operating Limitations, and Other Requirements**

As stated in §§63.6612, 63.6625 and 63.6630, you must initially comply with the emission and operating limitations as required by the following:

<b>For each . . .</b>	<b>Complying with the</b>	<b>You have demonstrated initial</b>
-----------------------	---------------------------	--------------------------------------



	<b>requirement to . . .</b>	<b>compliance if . . .</b>
1. New or reconstructed non-emergency 2SLB stationary RICE >500 HP located at a major source of HAP, new or reconstructed non-emergency 4SLB stationary RICE ≥250 HP located at a major source of HAP, non-emergency stationary CI RICE >500 HP located at a major source of HAP, and existing non-emergency stationary CI RICE >500 HP located at an area source of HAP	a. Reduce CO emissions and using oxidation catalyst, and using a CPMS	i. The average reduction of emissions of CO determined from the initial performance test achieves the required CO percent reduction; and ii. You have installed a CPMS to continuously monitor catalyst inlet temperature according to the requirements in §63.6625(b); and iii. You have recorded the catalyst pressure drop and catalyst inlet temperature during the initial performance test.
2. Non-emergency stationary CI RICE >500 HP located at a major source of HAP, and existing non-emergency stationary CI RICE >500 HP located at an area source of HAP	a. Limit the concentration of CO, using oxidation catalyst, and using a CPMS	i. The average CO concentration determined from the initial performance test is less than or equal to the CO emission limitation; and
		ii. You have installed a CPMS to continuously monitor catalyst inlet temperature according to the requirements in §63.6625(b); and
		iii. You have recorded the catalyst pressure drop and catalyst inlet temperature during the initial performance test.
3. New or reconstructed non-emergency 2SLB stationary RICE >500 HP located at a major source of HAP, new or reconstructed non-emergency 4SLB stationary RICE ≥250 HP located at a major source of HAP, non-emergency stationary CI RICE >500 HP located at a major source of HAP, and existing non-emergency stationary CI RICE >500 HP located at an area source of HAP	a. Reduce CO emissions and not using oxidation catalyst	i. The average reduction of emissions of CO determined from the initial performance test achieves the required CO percent reduction; and ii. You have installed a CPMS to continuously monitor operating parameters approved by the Administrator (if any) according to the requirements in §63.6625(b); and iii. You have recorded the approved operating parameters (if any) during the initial performance test.
4. Non-emergency stationary CI RICE >500 HP located at a major source of HAP, and existing non-emergency stationary CI RICE >500 HP	a. Limit the concentration of CO, and not using oxidation	i. The average CO concentration determined from the initial performance test is less than or equal to the CO emission limitation; and

located at an area source of HAP	catalyst	ii. You have installed a CPMS to continuously monitor operating parameters approved by the Administrator (if any) according to the requirements in §63.6625(b); and
		iii. You have recorded the approved operating parameters (if any) during the initial performance test.
5. New or reconstructed non-emergency 2SLB stationary RICE >500 HP located at a major source of HAP, new or reconstructed non-emergency 4SLB stationary RICE ≥250 HP located at a major source of HAP, non-emergency stationary CI RICE >500 HP located at a major source of HAP, and existing non-emergency stationary CI RICE >500 HP located at an area source of HAP	a. Reduce CO emissions, and using a CEMS	i. You have installed a CEMS to continuously monitor CO and either O <sub>2</sub> or CO <sub>2</sub> at both the inlet and outlet of the oxidation catalyst according to the requirements in §63.6625(a); and ii. You have conducted a performance evaluation of your CEMS using PS 3 and 4A of 40 CFR part 60, appendix B; and
		iii. The average reduction of CO calculated using §63.6620 equals or exceeds the required percent reduction. The initial test comprises the first 4-hour period after successful validation of the CEMS. Compliance is based on the average percent reduction achieved during the 4-hour period.
6. Non-emergency stationary CI RICE >500 HP located at a major source of HAP, and existing non-emergency stationary CI RICE >500 HP located at an area source of HAP	a. Limit the concentration of CO, and using a CEMS	i. You have installed a CEMS to continuously monitor CO and either O <sub>2</sub> or CO <sub>2</sub> at the outlet of the oxidation catalyst according to the requirements in §63.6625(a); and
		ii. You have conducted a performance evaluation of your CEMS using PS 3 and 4A of 40 CFR part 60, appendix B; and
		iii. The average concentration of CO calculated using §63.6620 is less than or equal to the CO emission limitation. The initial test comprises the first 4-hour period after successful validation of the CEMS. Compliance is based on the average concentration measured during the 4-hour

		period.
7. Non-emergency 4SRB stationary RICE >500 HP located at a major source of HAP	a. Reduce formaldehyde emissions and using NSCR	i. The average reduction of emissions of formaldehyde determined from the initial performance test is equal to or greater than the required formaldehyde percent reduction, or the average reduction of emissions of THC determined from the initial performance test is equal to or greater than 30 percent; and
		ii. You have installed a CPMS to continuously monitor catalyst inlet temperature according to the requirements in §63.6625(b); and
		iii. You have recorded the catalyst pressure drop and catalyst inlet temperature during the initial performance test.
8. Non-emergency 4SRB stationary RICE >500 HP located at a major source of HAP	a. Reduce formaldehyde emissions and not using NSCR	i. The average reduction of emissions of formaldehyde determined from the initial performance test is equal to or greater than the required formaldehyde percent reduction or the average reduction of emissions of THC determined from the initial performance test is equal to or greater than 30 percent; and
		ii. You have installed a CPMS to continuously monitor operating parameters approved by the Administrator (if any) according to the requirements in §63.6625(b); and
		iii. You have recorded the approved operating parameters (if any) during the initial performance test.
9. New or reconstructed non-emergency stationary RICE >500 HP located at a major source of HAP, new or reconstructed non-emergency 4SLB stationary RICE $250 \leq \text{HP} \leq 500$ located at a major source of HAP, and existing non-emergency 4SRB stationary RICE >500 HP	a. Limit the concentration of formaldehyde in the stationary RICE exhaust and using oxidation catalyst or	i. The average formaldehyde concentration, corrected to 15 percent O <sub>2</sub> , dry basis, from the three test runs is less than or equal to the formaldehyde emission limitation; and ii. You have installed a CPMS to continuously monitor catalyst inlet

located at a major source of HAP	NSCR	temperature according to the requirements in §63.6625(b); and
		iii. You have recorded the catalyst pressure drop and catalyst inlet temperature during the initial performance test.
10. New or reconstructed non-emergency stationary RICE >500 HP located at a major source of HAP, new or reconstructed non-emergency 4SLB stationary RICE $250 \leq \text{HP} \leq 500$ located at a major source of HAP, and existing non-emergency 4SRB stationary RICE >500 HP located at a major source of HAP	a. Limit the concentration of formaldehyde in the stationary RICE exhaust and not using oxidation catalyst or NSCR	i. The average formaldehyde concentration, corrected to 15 percent O <sub>2</sub> , dry basis, from the three test runs is less than or equal to the formaldehyde emission limitation; and ii. You have installed a CPMS to continuously monitor operating parameters approved by the Administrator (if any) according to the requirements in §63.6625(b); and
		iii. You have recorded the approved operating parameters (if any) during the initial performance test.
11. Existing non-emergency stationary RICE $100 \leq \text{HP} \leq 500$ located at a major source of HAP, and existing non-emergency stationary CI RICE $300 < \text{HP} \leq 500$ located at an area source of HAP	a. Reduce CO emissions	i. The average reduction of emissions of CO or formaldehyde, as applicable determined from the initial performance test is equal to or greater than the required CO or formaldehyde, as applicable, percent reduction.
12. Existing non-emergency stationary RICE $100 \leq \text{HP} \leq 500$ located at a major source of HAP, and existing non-emergency stationary CI RICE $300 < \text{HP} \leq 500$ located at an area source of HAP	a. Limit the concentration of formaldehyde or CO in the stationary RICE exhaust	i. The average formaldehyde or CO concentration, as applicable, corrected to 15 percent O <sub>2</sub> , dry basis, from the three test runs is less than or equal to the formaldehyde or CO emission limitation, as applicable.
13. Existing non-emergency 4SLB stationary RICE >500 HP located at an area source of HAP that are not remote stationary RICE and that are operated more than 24 hours per calendar year	a. Install an oxidation catalyst	i. You have conducted an initial compliance demonstration as specified in §63.6630(e) to show that the average reduction of emissions of CO is 93 percent or more, or the average CO concentration is less than or equal to 47 ppmvd at 15 percent O <sub>2</sub> ;
		ii. You have installed a CPMS to continuously monitor catalyst inlet

		temperature according to the requirements in §63.6625(b), or you have installed equipment to automatically shut down the engine if the catalyst inlet temperature exceeds 1350 °F.
14. Existing non-emergency 4SRB stationary RICE >500 HP located at an area source of HAP that are not remote stationary RICE and that are operated more than 24 hours per calendar year	a. Install NSCR	i. You have conducted an initial compliance demonstration as specified in §63.6630(e) to show that the average reduction of emissions of CO is 75 percent or more, the average CO concentration is less than or equal to 270 ppmvd at 15 percent O <sub>2</sub> , or the average reduction of emissions of THC is 30 percent or more;
		ii. You have installed a CPMS to continuously monitor catalyst inlet temperature according to the requirements in §63.6625(b), or you have installed equipment to automatically shut down the engine if the catalyst inlet temperature exceeds 1250 °F.

[78 FR 6712, Jan. 30, 2013]

[↑ Back to Top](#)

**Table 6 to Subpart ZZZZ of Part 63—Continuous Compliance With Emission Limitations, and Other Requirements**

As stated in §63.6640, you must continuously comply with the emissions and operating limitations and work or management practices as required by the following:

<b>For each . . .</b>	<b>Complying with the requirement to . . .</b>	<b>You must demonstrate continuous compliance by . . .</b>
1. New or reconstructed non-emergency 2SLB stationary RICE >500 HP located at a major source of HAP, new or reconstructed non-emergency 4SLB stationary RICE ≥250 HP located at a major source of HAP, and new or reconstructed non-emergency CI stationary RICE >500 HP located at a major source of HAP	a. Reduce CO emissions and using an oxidation catalyst, and using a CPMS	i. Conducting semiannual performance tests for CO to demonstrate that the required CO percent reduction is achieved <sup>a</sup> ; and ii. Collecting the catalyst inlet temperature data according to §63.6625(b); and iii. Reducing these data to 4-hour rolling averages; and
		iv. Maintaining the 4-hour rolling averages within the operating limitations for the

		catalyst inlet temperature; and
		v. Measuring the pressure drop across the catalyst once per month and demonstrating that the pressure drop across the catalyst is within the operating limitation established during the performance test.
2. New or reconstructed non-emergency 2SLB stationary RICE >500 HP located at a major source of HAP, new or reconstructed non-emergency 4SLB stationary RICE ≥250 HP located at a major source of HAP, and new or reconstructed non-emergency CI stationary RICE >500 HP located at a major source of HAP	a. Reduce CO emissions and not using an oxidation catalyst, and using a CPMS	<p>i. Conducting semiannual performance tests for CO to demonstrate that the required CO percent reduction is achieved<sup>a</sup>; and</p> <p>ii. Collecting the approved operating parameter (if any) data according to §63.6625(b); and</p> <p>iii. Reducing these data to 4-hour rolling averages; and</p>
		iv. Maintaining the 4-hour rolling averages within the operating limitations for the operating parameters established during the performance test.
3. New or reconstructed non-emergency 2SLB stationary RICE >500 HP located at a major source of HAP, new or reconstructed non-emergency 4SLB stationary RICE ≥250 HP located at a major source of HAP, new or reconstructed non-emergency stationary CI RICE >500 HP located at a major source of HAP, and existing non-emergency stationary CI RICE >500 HP	a. Reduce CO emissions or limit the concentration of CO in the stationary RICE exhaust, and using a CEMS	<p>i. Collecting the monitoring data according to §63.6625(a), reducing the measurements to 1-hour averages, calculating the percent reduction or concentration of CO emissions according to §63.6620; and</p> <p>ii. Demonstrating that the catalyst achieves the required percent reduction of CO emissions over the 4-hour averaging period, or that the emission remain at or below the CO concentration limit; and</p>
		iii. Conducting an annual RATA of your CEMS using PS 3 and 4A of 40 CFR part 60, appendix B, as well as daily and periodic data quality checks in accordance with 40 CFR part 60, appendix F, procedure 1.
4. Non-emergency 4SRB stationary RICE >500 HP located at a major source of HAP	a. Reduce formaldehyde emissions and using	i. Collecting the catalyst inlet temperature data according to §63.6625(b); and

	NSCR	
		ii. Reducing these data to 4-hour rolling averages; and
		iii. Maintaining the 4-hour rolling averages within the operating limitations for the catalyst inlet temperature; and
		iv. Measuring the pressure drop across the catalyst once per month and demonstrating that the pressure drop across the catalyst is within the operating limitation established during the performance test.
5. Non-emergency 4SRB stationary RICE >500 HP located at a major source of HAP	a. Reduce formaldehyde emissions and not using NSCR	i. Collecting the approved operating parameter (if any) data according to §63.6625(b); and
		ii. Reducing these data to 4-hour rolling averages; and
		iii. Maintaining the 4-hour rolling averages within the operating limitations for the operating parameters established during the performance test.
6. Non-emergency 4SRB stationary RICE with a brake HP $\geq 5,000$ located at a major source of HAP	a. Reduce formaldehyde emissions	Conducting semiannual performance tests for formaldehyde to demonstrate that the required formaldehyde percent reduction is achieved, or to demonstrate that the average reduction of emissions of THC determined from the performance test is equal to or greater than 30 percent. <sup>a</sup>
7. New or reconstructed non-emergency stationary RICE >500 HP located at a major source of HAP and new or reconstructed non-emergency 4SLB stationary RICE $250 \leq \text{HP} \leq 500$ located at a major source of HAP	a. Limit the concentration of formaldehyde in the stationary RICE exhaust and using oxidation catalyst or NSCR	i. Conducting semiannual performance tests for formaldehyde to demonstrate that your emissions remain at or below the formaldehyde concentration limit <sup>a</sup> ; and ii. Collecting the catalyst inlet temperature data according to §63.6625(b); and

		iii. Reducing these data to 4-hour rolling averages; and
		iv. Maintaining the 4-hour rolling averages within the operating limitations for the catalyst inlet temperature; and
		v. Measuring the pressure drop across the catalyst once per month and demonstrating that the pressure drop across the catalyst is within the operating limitation established during the performance test.
8. New or reconstructed non-emergency stationary RICE >500 HP located at a major source of HAP and new or reconstructed non-emergency 4SLB stationary RICE $250 \leq \text{HP} \leq 500$ located at a major source of HAP	a. Limit the concentration of formaldehyde in the stationary RICE exhaust and not using oxidation catalyst or NSCR	i. Conducting semiannual performance tests for formaldehyde to demonstrate that your emissions remain at or below the formaldehyde concentration limit <sup>a</sup> ; and ii. Collecting the approved operating parameter (if any) data according to §63.6625(b); and
		iii. Reducing these data to 4-hour rolling averages; and
		iv. Maintaining the 4-hour rolling averages within the operating limitations for the operating parameters established during the performance test.
9. Existing emergency and black start stationary RICE $\leq 500$ HP located at a major source of HAP, existing non-emergency stationary RICE <100 HP located at a major source of HAP, existing emergency and black start stationary RICE located at an area source of HAP, existing non-emergency stationary CI RICE $\leq 300$ HP located at an area source of HAP, existing non-emergency 2SLB stationary RICE located at an area source of HAP, existing non-emergency stationary SI RICE located at an area source of HAP which combusts landfill or digester gas equivalent to 10 percent or more of the gross heat input on an annual basis, existing non-emergency 4SLB and 4SRB stationary RICE $\leq 500$ HP located at an area source of HAP, existing non-emergency 4SLB and 4SRB	a. Work or Management practices	i. Operating and maintaining the stationary RICE according to the manufacturer's emission-related operation and maintenance instructions; or ii. Develop and follow your own maintenance plan which must provide to the extent practicable for the maintenance and operation of the engine in a manner consistent with good air pollution control practice for minimizing emissions.



stationary RICE >500 HP located at an area source of HAP that operate 24 hours or less per calendar year, and existing non-emergency 4SLB and 4SRB stationary RICE >500 HP located at an area source of HAP that are remote stationary RICE		
10. Existing stationary CI RICE >500 HP that are not limited use stationary RICE	a. Reduce CO emissions, or limit the concentration of CO in the stationary RICE exhaust, and using oxidation catalyst	i. Conducting performance tests every 8,760 hours or 3 years, whichever comes first, for CO or formaldehyde, as appropriate, to demonstrate that the required CO or formaldehyde, as appropriate, percent reduction is achieved or that your emissions remain at or below the CO or formaldehyde concentration limit; and
		ii. Collecting the catalyst inlet temperature data according to §63.6625(b); and
		iii. Reducing these data to 4-hour rolling averages; and
		iv. Maintaining the 4-hour rolling averages within the operating limitations for the catalyst inlet temperature; and
		v. Measuring the pressure drop across the catalyst once per month and demonstrating that the pressure drop across the catalyst is within the operating limitation established during the performance test.
11. Existing stationary CI RICE >500 HP that are not limited use stationary RICE	a. Reduce CO emissions, or limit the concentration of CO in the stationary RICE exhaust, and not using oxidation catalyst	i. Conducting performance tests every 8,760 hours or 3 years, whichever comes first, for CO or formaldehyde, as appropriate, to demonstrate that the required CO or formaldehyde, as appropriate, percent reduction is achieved or that your emissions remain at or below the CO or formaldehyde concentration limit; and
		ii. Collecting the approved operating parameter (if any) data according to

		§63.6625(b); and
		iii. Reducing these data to 4-hour rolling averages; and
		iv. Maintaining the 4-hour rolling averages within the operating limitations for the operating parameters established during the performance test.
12. Existing limited use CI stationary RICE >500 HP	a. Reduce CO emissions or limit the concentration of CO in the stationary RICE exhaust, and using an oxidation catalyst	i. Conducting performance tests every 8,760 hours or 5 years, whichever comes first, for CO or formaldehyde, as appropriate, to demonstrate that the required CO or formaldehyde, as appropriate, percent reduction is achieved or that your emissions remain at or below the CO or formaldehyde concentration limit; and
		ii. Collecting the catalyst inlet temperature data according to §63.6625(b); and
		iii. Reducing these data to 4-hour rolling averages; and
		iv. Maintaining the 4-hour rolling averages within the operating limitations for the catalyst inlet temperature; and
		v. Measuring the pressure drop across the catalyst once per month and demonstrating that the pressure drop across the catalyst is within the operating limitation established during the performance test.
13. Existing limited use CI stationary RICE >500 HP	a. Reduce CO emissions or limit the concentration of CO in the stationary RICE exhaust, and not using an oxidation catalyst	i. Conducting performance tests every 8,760 hours or 5 years, whichever comes first, for CO or formaldehyde, as appropriate, to demonstrate that the required CO or formaldehyde, as appropriate, percent reduction is achieved or that your emissions remain at or below the CO or formaldehyde concentration limit; and

		ii. Collecting the approved operating parameter (if any) data according to §63.6625(b); and
		iii. Reducing these data to 4-hour rolling averages; and
		iv. Maintaining the 4-hour rolling averages within the operating limitations for the operating parameters established during the performance test.
14. Existing non-emergency 4SLB stationary RICE >500 HP located at an area source of HAP that are not remote stationary RICE and that are operated more than 24 hours per calendar year	a. Install an oxidation catalyst	<p>i. Conducting annual compliance demonstrations as specified in §63.6640(c) to show that the average reduction of emissions of CO is 93 percent or more, or the average CO concentration is less than or equal to 47 ppmvd at 15 percent O<sub>2</sub>; and either</p> <p>ii. Collecting the catalyst inlet temperature data according to §63.6625(b), reducing these data to 4-hour rolling averages; and maintaining the 4-hour rolling averages within the limitation of greater than 450 °F and less than or equal to 1350 °F for the catalyst inlet temperature; or</p> <p>iii. Immediately shutting down the engine if the catalyst inlet temperature exceeds 1350 °F.</p>
15. Existing non-emergency 4SRB stationary RICE >500 HP located at an area source of HAP that are not remote stationary RICE and that are operated more than 24 hours per calendar year	a. Install NSCR	<p>i. Conducting annual compliance demonstrations as specified in §63.6640(c) to show that the average reduction of emissions of CO is 75 percent or more, the average CO concentration is less than or equal to 270 ppmvd at 15 percent O<sub>2</sub>, or the average reduction of emissions of THC is 30 percent or more; and either</p> <p>ii. Collecting the catalyst inlet temperature data according to §63.6625(b), reducing these data to 4-hour rolling averages; and maintaining the 4-hour rolling averages within the limitation of greater than or equal to 750 °F and less than or equal to 1250 °F for the catalyst inlet temperature; or</p> <p>iii. Immediately shutting down the engine</p>

		if the catalyst inlet temperature exceeds 1250 °F.
--	--	--

<sup>a</sup>After you have demonstrated compliance for two consecutive tests, you may reduce the frequency of subsequent performance tests to annually. If the results of any subsequent annual performance test indicate the stationary RICE is not in compliance with the CO or formaldehyde emission limitation, or you deviate from any of your operating limitations, you must resume semiannual performance tests.

[78 FR 6715, Jan. 30, 2013]

[↑ Back to Top](#)

**Table 7 to Subpart ZZZZ of Part 63—Requirements for Reports**

As stated in §63.6650, you must comply with the following requirements for reports:

<b>For each . . .</b>	<b>You must submit a . . .</b>	<b>The report must contain . . .</b>	<b>You must submit the report . . .</b>
1. Existing non-emergency, non-black start stationary RICE $100 \leq \text{HP} \leq 500$ located at a major source of HAP; existing non-emergency, non-black start stationary CI RICE $>500$ HP located at a major source of HAP; existing non-emergency 4SRB stationary RICE $>500$ HP located at a major source of HAP; existing non-emergency, non-black start stationary CI RICE $>300$ HP located at an area source of HAP; new or reconstructed non-emergency stationary RICE $>500$ HP located at a major source of HAP; and new or reconstructed non-emergency 4SLB stationary RICE $250 \leq \text{HP} \leq 500$ located at a major source of HAP	Compliance report	a. If there are no deviations from any emission limitations or operating limitations that apply to you, a statement that there were no deviations from the emission limitations or operating limitations during the reporting period. If there were no periods during which the CMS, including CEMS and CPMS, was out-of-control, as specified in §63.8(c)(7), a statement that there were not periods during which the CMS was out-of-control during the reporting period; or	i. Semiannually according to the requirements in §63.6650(b)(1)-(5) for engines that are not limited use stationary RICE subject to numerical emission limitations; and ii. Annually according to the requirements in §63.6650(b)(6)-(9) for engines that are limited use stationary RICE subject to numerical emission limitations.
		b. If you had a deviation from any emission limitation or operating limitation during the reporting period, the information in §63.6650(d). If there were periods during which the CMS, including CEMS and CPMS, was out-of-control, as specified in §63.8(c)(7), the information in	i. Semiannually according to the requirements in §63.6650(b).

		§63.6650(e); or	
		c. If you had a malfunction during the reporting period, the information in §63.6650(c)(4).	i. Semiannually according to the requirements in §63.6650(b).
2. New or reconstructed non-emergency stationary RICE that combusts landfill gas or digester gas equivalent to 10 percent or more of the gross heat input on an annual basis	Report	a. The fuel flow rate of each fuel and the heating values that were used in your calculations, and you must demonstrate that the percentage of heat input provided by landfill gas or digester gas, is equivalent to 10 percent or more of the gross heat input on an annual basis; and	i. Annually, according to the requirements in §63.6650.
		b. The operating limits provided in your federally enforceable permit, and any deviations from these limits; and	i. See item 2.a.i.
		c. Any problems or errors suspected with the meters.	i. See item 2.a.i.
3. Existing non-emergency, non-black start 4SLB and 4SRB stationary RICE >500 HP located at an area source of HAP that are not remote stationary RICE and that operate more than 24 hours per calendar year	Compliance report	a. The results of the annual compliance demonstration, if conducted during the reporting period.	i. Semiannually according to the requirements in §63.6650(b)(1)-(5).
4. Emergency stationary RICE that operate or are contractually obligated to be available for more than 15 hours per year for the purposes specified in §63.6640(f)(2)(ii) and (iii) or that operate for the purposes specified in §63.6640(f)(4)(ii)	Report	a. The information in §63.6650(h)(1)	i. annually according to the requirements in §63.6650(h)(2)-(3).

[78 FR 6719, Jan. 30, 2013]

[↑ Back to Top](#)

**Table 8 to Subpart ZZZZ of Part 63—Applicability of General Provisions to Subpart ZZZZ.**

As stated in §63.6665, you must comply with the following applicable general provisions.

<b>General provisions citation</b>	<b>Subject of citation</b>	<b>Applies to subpart</b>	<b>Explanation</b>
§63.1	General applicability of the General Provisions	Yes.	
§63.2	Definitions	Yes	Additional terms defined in §63.6675.
§63.3	Units and abbreviations	Yes.	
§63.4	Prohibited activities and circumvention	Yes.	
§63.5	Construction and reconstruction	Yes.	
§63.6(a)	Applicability	Yes.	
§63.6(b)(1)-(4)	Compliance dates for new and reconstructed sources	Yes.	
§63.6(b)(5)	Notification	Yes.	
§63.6(b)(6)	[Reserved]		
§63.6(b)(7)	Compliance dates for new and reconstructed area sources that become major sources	Yes.	
§63.6(c)(1)-(2)	Compliance dates for existing sources	Yes.	
§63.6(c)(3)-(4)	[Reserved]		
§63.6(c)(5)	Compliance dates for existing area sources that become major sources	Yes.	
§63.6(d)	[Reserved]		
§63.6(e)	Operation and maintenance	No.	
§63.6(f)(1)	Applicability of standards	No.	

§63.6(f)(2)	Methods for determining compliance	Yes.	
§63.6(f)(3)	Finding of compliance	Yes.	
§63.6(g)(1)-(3)	Use of alternate standard	Yes.	
§63.6(h)	Opacity and visible emission standards	No	Subpart ZZZZ does not contain opacity or visible emission standards.
§63.6(i)	Compliance extension procedures and criteria	Yes.	
§63.6(j)	Presidential compliance exemption	Yes.	
§63.7(a)(1)-(2)	Performance test dates	Yes	Subpart ZZZZ contains performance test dates at §§63.6610, 63.6611, and 63.6612.
§63.7(a)(3)	CAA section 114 authority	Yes.	
§63.7(b)(1)	Notification of performance test	Yes	Except that §63.7(b)(1) only applies as specified in §63.6645.
§63.7(b)(2)	Notification of rescheduling	Yes	Except that §63.7(b)(2) only applies as specified in §63.6645.
§63.7(c)	Quality assurance/test plan	Yes	Except that §63.7(c) only applies as specified in §63.6645.
§63.7(d)	Testing facilities	Yes.	
§63.7(e)(1)	Conditions for conducting performance tests	No.	Subpart ZZZZ specifies conditions for conducting performance tests at §63.6620.
§63.7(e)(2)	Conduct of performance tests and reduction of data	Yes	Subpart ZZZZ specifies test methods at §63.6620.
§63.7(e)(3)	Test run duration	Yes.	
§63.7(e)(4)	Administrator may require other testing under section 114 of the	Yes.	

	CAA		
§63.7(f)	Alternative test method provisions	Yes.	
§63.7(g)	Performance test data analysis, recordkeeping, and reporting	Yes.	
§63.7(h)	Waiver of tests	Yes.	
§63.8(a)(1)	Applicability of monitoring requirements	Yes	Subpart ZZZZ contains specific requirements for monitoring at §63.6625.
§63.8(a)(2)	Performance specifications	Yes.	
§63.8(a)(3)	[Reserved]		
§63.8(a)(4)	Monitoring for control devices	No.	
§63.8(b)(1)	Monitoring	Yes.	
§63.8(b)(2)-(3)	Multiple effluents and multiple monitoring systems	Yes.	
§63.8(c)(1)	Monitoring system operation and maintenance	Yes.	
§63.8(c)(1)(i)	Routine and predictable SSM	No	
§63.8(c)(1)(ii)	SSM not in Startup Shutdown Malfunction Plan	Yes.	
§63.8(c)(1)(iii)	Compliance with operation and maintenance requirements	No	
§63.8(c)(2)-(3)	Monitoring system installation	Yes.	
§63.8(c)(4)	Continuous monitoring system (CMS) requirements	Yes	Except that subpart ZZZZ does not require Continuous Opacity Monitoring System (COMS).
§63.8(c)(5)	COMS minimum procedures	No	Subpart ZZZZ does not require COMS.



§63.8(c)(6)-(8)	CMS requirements	Yes	Except that subpart ZZZZ does not require COMS.
§63.8(d)	CMS quality control	Yes.	
§63.8(e)	CMS performance evaluation	Yes	Except for §63.8(e)(5)(ii), which applies to COMS.
		Except that §63.8(e) only applies as specified in §63.6645.	
§63.8(f)(1)-(5)	Alternative monitoring method	Yes	Except that §63.8(f)(4) only applies as specified in §63.6645.
§63.8(f)(6)	Alternative to relative accuracy test	Yes	Except that §63.8(f)(6) only applies as specified in §63.6645.
§63.8(g)	Data reduction	Yes	Except that provisions for COMS are not applicable. Averaging periods for demonstrating compliance are specified at §§63.6635 and 63.6640.
§63.9(a)	Applicability and State delegation of notification requirements	Yes.	
§63.9(b)(1)-(5)	Initial notifications	Yes	Except that §63.9(b)(3) is reserved.
		Except that §63.9(b) only applies as specified in §63.6645.	
§63.9(c)	Request for compliance extension	Yes	Except that §63.9(c) only applies as specified in §63.6645.
§63.9(d)	Notification of special compliance requirements for new sources	Yes	Except that §63.9(d) only applies as specified in §63.6645.
§63.9(e)	Notification of performance test	Yes	Except that §63.9(e) only applies as specified in §63.6645.

§63.9(f)	Notification of visible emission (VE)/opacity test	No	Subpart ZZZZ does not contain opacity or VE standards.
§63.9(g)(1)	Notification of performance evaluation	Yes	Except that §63.9(g) only applies as specified in §63.6645.
§63.9(g)(2)	Notification of use of COMS data	No	Subpart ZZZZ does not contain opacity or VE standards.
§63.9(g)(3)	Notification that criterion for alternative to RATA is exceeded	Yes	If alternative is in use.
		Except that §63.9(g) only applies as specified in §63.6645.	
§63.9(h)(1)-(6)	Notification of compliance status	Yes	Except that notifications for sources using a CEMS are due 30 days after completion of performance evaluations. §63.9(h)(4) is reserved.
			Except that §63.9(h) only applies as specified in §63.6645.
§63.9(i)	Adjustment of submittal deadlines	Yes.	
§63.9(j)	Change in previous information	Yes.	
§63.10(a)	Administrative provisions for recordkeeping/reporting	Yes.	
§63.10(b)(1)	Record retention	Yes	Except that the most recent 2 years of data do not have to be retained on site.
§63.10(b)(2)(i)-(v)	Records related to SSM	No.	
§63.10(b)(2)(vi)-(xi)	Records	Yes.	
§63.10(b)(2)(xii)	Record when under waiver	Yes.	
§63.10(b)(2)(xiii)	Records when using alternative to	Yes	For CO standard if using RATA

	RATA		alternative.
§63.10(b)(2)(xiv)	Records of supporting documentation	Yes.	
§63.10(b)(3)	Records of applicability determination	Yes.	
§63.10(c)	Additional records for sources using CEMS	Yes	Except that §63.10(c)(2)-(4) and (9) are reserved.
§63.10(d)(1)	General reporting requirements	Yes.	
§63.10(d)(2)	Report of performance test results	Yes.	
§63.10(d)(3)	Reporting opacity or VE observations	No	Subpart ZZZZ does not contain opacity or VE standards.
§63.10(d)(4)	Progress reports	Yes.	
§63.10(d)(5)	Startup, shutdown, and malfunction reports	No.	
§63.10(e)(1) and (2)(i)	Additional CMS Reports	Yes.	
§63.10(e)(2)(ii)	COMS-related report	No	Subpart ZZZZ does not require COMS.
§63.10(e)(3)	Excess emission and parameter exceedances reports	Yes.	Except that §63.10(e)(3)(i) (C) is reserved.
§63.10(e)(4)	Reporting COMS data	No	Subpart ZZZZ does not require COMS.
§63.10(f)	Waiver for recordkeeping/reporting	Yes.	
§63.11	Flares	No.	
§63.12	State authority and delegations	Yes.	
§63.13	Addresses	Yes.	
§63.14	Incorporation by reference	Yes.	

§63.15	Availability of information	Yes.	
--------	-----------------------------	------	--

[75 FR 9688, Mar. 3, 2010, as amended at 78 FR 6720, Jan. 30, 2013]

[↑ Back to Top](#)

## **Appendix A to Subpart ZZZZ of Part 63—Protocol for Using an Electrochemical Analyzer to Determine Oxygen and Carbon Monoxide Concentrations From Certain Engines**

### 1.0 Scope and Application. What is this Protocol?

This protocol is a procedure for using portable electrochemical (EC) cells for measuring carbon monoxide (CO) and oxygen (O<sub>2</sub>) concentrations in controlled and uncontrolled emissions from existing stationary 4-stroke lean burn and 4-stroke rich burn reciprocating internal combustion engines as specified in the applicable rule.

#### *1.1 Analytes. What does this protocol determine?*

This protocol measures the engine exhaust gas concentrations of carbon monoxide (CO) and oxygen (O<sub>2</sub>).

<b>Analyte</b>	<b>CAS No.</b>	<b>Sensitivity</b>
Carbon monoxide (CO)	630-08-0	Minimum detectable limit should be 2 percent of the nominal range or 1 ppm, whichever is less restrictive.
Oxygen (O <sub>2</sub> )	7782-44-7	

#### *1.2 Applicability. When is this protocol acceptable?*

This protocol is applicable to 40 CFR part 63, subpart ZZZZ. Because of inherent cross sensitivities of EC cells, you must not apply this protocol to other emissions sources without specific instruction to that effect.

#### *1.3 Data Quality Objectives. How good must my collected data be?*

Refer to Section 13 to verify and document acceptable analyzer performance.

#### *1.4 Range. What is the targeted analytical range for this protocol?*

The measurement system and EC cell design(s) conforming to this protocol will determine the analytical range for each gas component. The nominal ranges are defined by choosing up-scale calibration gas concentrations near the maximum anticipated flue gas concentrations for CO and O<sub>2</sub>, or no more than twice the permitted CO level.

#### *1.5 Sensitivity. What minimum detectable limit will this protocol yield for a particular gas component?*

The minimum detectable limit depends on the nominal range and resolution of the specific EC cell used, and the signal to noise ratio of the measurement system. The minimum detectable limit should be 2 percent of the nominal range or 1 ppm, whichever is less restrictive.

### 2.0 Summary of Protocol

In this protocol, a gas sample is extracted from an engine exhaust system and then conveyed to a portable EC analyzer for measurement of CO and O<sub>2</sub> gas concentrations. This method provides measurement system performance specifications and sampling protocols to ensure reliable data. You may use additions to, or modifications of vendor supplied measurement systems (e.g., heated or unheated sample lines, thermocouples, flow meters, selective gas scrubbers, etc.) to meet the design specifications of this protocol. Do not make changes to the measurement system from the as-verified configuration (Section 3.12).

### 3.0 Definitions

*3.1 Measurement System.* The total equipment required for the measurement of CO and O<sub>2</sub> concentrations. The measurement system consists of the following major subsystems:

*3.1.1 Data Recorder.* A strip chart recorder, computer or digital recorder for logging measurement data from the analyzer output. You may record measurement data from the digital data display manually or electronically.

*3.1.2 Electrochemical (EC) Cell.* A device, similar to a fuel cell, used to sense the presence of a specific analyte and generate an electrical current output proportional to the analyte concentration.

*3.1.3 Interference Gas Scrubber.* A device used to remove or neutralize chemical compounds that may interfere with the selective operation of an EC cell.

*3.1.4 Moisture Removal System.* Any device used to reduce the concentration of moisture in the sample stream so as to protect the EC cells from the damaging effects of condensation and to minimize errors in measurements caused by the scrubbing of soluble gases.

*3.1.5 Sample Interface.* The portion of the system used for one or more of the following: sample acquisition; sample transport; sample conditioning or protection of the EC cell from any degrading effects of the engine exhaust effluent; removal of particulate matter and condensed moisture.

*3.2 Nominal Range.* The range of analyte concentrations over which each EC cell is operated (normally 25 percent to 150 percent of up-scale calibration gas value). Several nominal ranges can be used for any given cell so long as the calibration and repeatability checks for that range remain within specifications.

*3.3 Calibration Gas.* A vendor certified concentration of a specific analyte in an appropriate balance gas.

*3.4 Zero Calibration Error.* The analyte concentration output exhibited by the EC cell in response to zero-level calibration gas.

*3.5 Up-Scale Calibration Error.* The mean of the difference between the analyte concentration exhibited by the EC cell and the certified concentration of the up-scale calibration gas.

*3.6 Interference Check.* A procedure for quantifying analytical interference from components in the engine exhaust gas other than the targeted analytes.

*3.7 Repeatability Check.* A protocol for demonstrating that an EC cell operated over a given nominal analyte concentration range provides a stable and consistent response and is not significantly affected by repeated exposure to that gas.

*3.8 Sample Flow Rate.* The flow rate of the gas sample as it passes through the EC cell. In some situations, EC cells can experience drift with changes in flow rate. The flow rate must be monitored and documented during all phases of a sampling run.

*3.9 Sampling Run.* A timed three-phase event whereby an EC cell's response rises and plateaus in a sample conditioning phase, remains relatively constant during a measurement data phase, then declines during a refresh phase. The sample conditioning phase exposes the EC cell to the gas sample for a length of time sufficient to reach a constant response. The measurement data phase is the time interval during which gas sample measurements can be made that meet the acceptance criteria of this protocol. The refresh phase then purges the EC cells with CO-free air. The refresh phase replenishes requisite O<sub>2</sub> and moisture in the electrolyte reserve and provides a mechanism to degas or desorb any interference gas scrubbers or filters so as to enable a stable CO EC cell response. There are four primary types of sampling runs: pre-sampling calibrations; stack gas sampling; post-sampling calibration checks; and measurement system repeatability checks. Stack gas sampling runs can be chained together for extended evaluations, providing all other procedural specifications are met.

*3.10 Sampling Day.* A time not to exceed twelve hours from the time of the pre-sampling calibration to the post-sampling calibration check. During this time, stack gas sampling runs can be repeated without repeated recalibrations, providing all other sampling specifications have been met.

*3.11 Pre-Sampling Calibration/Post-Sampling Calibration Check.* The protocols executed at the beginning and end of each sampling day to bracket measurement readings with controlled performance checks.

*3.12 Performance-Established Configuration.* The EC cell and sampling system configuration that existed at the time that it initially met the performance requirements of this protocol.

#### 4.0 Interferences.

When present in sufficient concentrations, NO and NO<sub>2</sub> are two gas species that have been reported to interfere with CO concentration measurements. In the likelihood of this occurrence, it is the protocol user's responsibility to employ and properly maintain an appropriate CO EC cell filter or scrubber for removal of these gases, as described in Section 6.2.12.

#### 5.0 Safety. [Reserved]

#### 6.0 Equipment and Supplies.

##### *6.1 What equipment do I need for the measurement system?*

The system must maintain the gas sample at conditions that will prevent moisture condensation in the sample transport lines, both before and as the sample gas contacts the EC cells. The essential components of the measurement system are described below.

##### *6.2 Measurement System Components.*

*6.2.1 Sample Probe.* A single extraction-point probe constructed of glass, stainless steel or other non-reactive material, and of length sufficient to reach any designated sampling point. The sample probe must be designed to prevent plugging due to condensation or particulate matter.

*6.2.2 Sample Line.* Non-reactive tubing to transport the effluent from the sample probe to the EC cell.

*6.2.3 Calibration Assembly (optional).* A three-way valve assembly or equivalent to introduce calibration gases at ambient pressure at the exit end of the sample probe during calibration checks. The assembly must be designed such that only stack gas or calibration gas flows in the sample line and all gases flow through any gas path filters.

*6.2.4 Particulate Filter (optional).* Filters before the inlet of the EC cell to prevent accumulation of particulate material in the measurement system and extend the useful life of the components. All filters must be fabricated of materials that are non-reactive to the gas mixtures being sampled.

*6.2.5 Sample Pump.* A leak-free pump to provide undiluted sample gas to the system at a flow rate sufficient to minimize the response time of the measurement system. If located upstream of the EC cells, the pump must be constructed of a material that is non-reactive to the gas mixtures being sampled.

*6.2.8 Sample Flow Rate Monitoring.* An adjustable rotameter or equivalent device used to adjust and maintain the sample flow rate through the analyzer as prescribed.

*6.2.9 Sample Gas Manifold (optional).* A manifold to divert a portion of the sample gas stream to the analyzer and the remainder to a by-pass discharge vent. The sample gas manifold may also include provisions for introducing calibration gases directly to the analyzer. The manifold must be constructed of a material that is non-reactive to the gas mixtures being sampled.

*6.2.10 EC cell.* A device containing one or more EC cells to determine the CO and O<sub>2</sub> concentrations in the sample gas stream. The EC cell(s) must meet the applicable performance specifications of Section 13 of this protocol.

*6.2.11 Data Recorder.* A strip chart recorder, computer or digital recorder to make a record of analyzer output data. The data recorder resolution (i.e., readability) must be no greater than 1 ppm for CO; 0.1 percent for O<sub>2</sub>; and one degree (either °C or °F) for temperature. Alternatively, you may use a digital or analog meter having the same resolution to observe and manually record the analyzer responses.

*6.2.12 Interference Gas Filter or Scrubber.* A device to remove interfering compounds upstream of the CO EC cell. Specific interference gas filters or scrubbers used in the performance-established configuration of the analyzer must continue to be used. Such a filter or scrubber must have a means to determine when the removal agent is exhausted. Periodically replace or replenish it in accordance with the manufacturer's recommendations.

7.0 Reagents and Standards. What calibration gases are needed?

*7.1 Calibration Gases.* CO calibration gases for the EC cell must be CO in nitrogen or CO in a mixture of nitrogen and O<sub>2</sub>. Use CO calibration gases with labeled concentration values certified by the manufacturer to be within ±5 percent of the label value. Dry ambient air (20.9 percent O<sub>2</sub>) is acceptable for calibration of the O<sub>2</sub> cell. If needed, any lower percentage O<sub>2</sub> calibration gas must be a mixture of O<sub>2</sub> in nitrogen.

*7.1.1 Up-Scale CO Calibration Gas Concentration.* Choose one or more up-scale gas concentrations such that the average of the stack gas measurements for each stack gas sampling run are between 25 and 150 percent of those concentrations. Alternatively, choose an up-scale gas that does not exceed twice the concentration of the applicable outlet standard. If a measured gas value exceeds 150 percent of the up-scale CO calibration gas value at any time during the stack gas sampling run, the run must be discarded and repeated.

*7.1.2 Up-Scale O<sub>2</sub> Calibration Gas Concentration.*

Select an O<sub>2</sub> gas concentration such that the difference between the gas concentration and the average stack gas measurement or reading for each sample run is less than 15 percent O<sub>2</sub>. When the average exhaust gas O<sub>2</sub> readings are above 6 percent, you may use dry ambient air (20.9 percent O<sub>2</sub>) for the up-scale O<sub>2</sub> calibration gas.

*7.1.3 Zero Gas.* Use an inert gas that contains less than 0.25 percent of the up-scale CO calibration gas concentration. You may use dry air that is free from ambient CO and other combustion gas products (e.g., CO<sub>2</sub>).

8.0 Sample Collection and Analysis

## 8.1 Selection of Sampling Sites.

*8.1.1 Control Device Inlet.* Select a sampling site sufficiently downstream of the engine so that the combustion gases should be well mixed. Use a single sampling extraction point near the center of the duct (e.g., within the 10 percent centroidal area), unless instructed otherwise.

*8.1.2 Exhaust Gas Outlet.* Select a sampling site located at least two stack diameters downstream of any disturbance (e.g., turbocharger exhaust, crossover junction or recirculation take-off) and at least one-half stack diameter upstream of the gas discharge to the atmosphere. Use a single sampling extraction point near the center of the duct (e.g., within the 10 percent centroidal area), unless instructed otherwise.

*8.2 Stack Gas Collection and Analysis.* Prior to the first stack gas sampling run, conduct that the pre-sampling calibration in accordance with Section 10.1. Use Figure 1 to record all data. Zero the analyzer with zero gas. Confirm and record that the scrubber media color is correct and not exhausted. Then position the probe at the sampling point and begin the sampling run at the same flow rate used during the up-scale calibration. Record the start time. Record all EC cell output responses and the flow rate during the “sample conditioning phase” once per minute until constant readings are obtained. Then begin the “measurement data phase” and record readings every 15 seconds for at least two minutes (or eight readings), or as otherwise required to achieve two continuous minutes of data that meet the specification given in Section 13.1. Finally, perform the “refresh phase” by introducing dry air, free from CO and other combustion gases, until several minute-to-minute readings of consistent value have been obtained. For each run use the “measurement data phase” readings to calculate the average stack gas CO and O<sub>2</sub> concentrations.

*8.3 EC Cell Rate.* Maintain the EC cell sample flow rate so that it does not vary by more than  $\pm 10$  percent throughout the pre-sampling calibration, stack gas sampling and post-sampling calibration check. Alternatively, the EC cell sample flow rate can be maintained within a tolerance range that does not affect the gas concentration readings by more than  $\pm 3$  percent, as instructed by the EC cell manufacturer.

## 9.0 Quality Control (Reserved)

## 10.0 Calibration and Standardization

*10.1 Pre-Sampling Calibration.* Conduct the following protocol once for each nominal range to be used on each EC cell before performing a stack gas sampling run on each field sampling day. Repeat the calibration if you replace an EC cell before completing all of the sampling runs. There is no prescribed order for calibration of the EC cells; however, each cell must complete the measurement data phase during calibration. Assemble the measurement system by following the manufacturer's recommended protocols including for preparing and preconditioning the EC cell. Assure the measurement system has no leaks and verify the gas scrubbing agent is not depleted. Use Figure 1 to record all data.

*10.1.1 Zero Calibration.* For both the O<sub>2</sub> and CO cells, introduce zero gas to the measurement system (e.g., at the calibration assembly) and record the concentration reading every minute until readings are constant for at least two consecutive minutes. Include the time and sample flow rate. Repeat the steps in this section at least once to verify the zero calibration for each component gas.

*10.1.2 Zero Calibration Tolerance.* For each zero gas introduction, the zero level output must be less than or equal to  $\pm 3$  percent of the up-scale gas value or  $\pm 1$  ppm, whichever is less restrictive, for the CO channel and less than or equal to  $\pm 0.3$  percent O<sub>2</sub> for the O<sub>2</sub> channel.

*10.1.3 Up-Scale Calibration.* Individually introduce each calibration gas to the measurement system (e.g., at the calibration assembly) and record the start time. Record all EC cell output responses and the flow rate during this



“sample conditioning phase” once per minute until readings are constant for at least two minutes. Then begin the “measurement data phase” and record readings every 15 seconds for a total of two minutes, or as otherwise required. Finally, perform the “refresh phase” by introducing dry air, free from CO and other combustion gases, until readings are constant for at least two consecutive minutes. Then repeat the steps in this section at least once to verify the calibration for each component gas. Introduce all gases to flow through the entire sample handling system (i.e., at the exit end of the sampling probe or the calibration assembly).

*10.1.4 Up-Scale Calibration Error.* The mean of the difference of the “measurement data phase” readings from the reported standard gas value must be less than or equal to  $\pm 5$  percent or  $\pm 1$  ppm for CO or  $\pm 0.5$  percent O<sub>2</sub>, whichever is less restrictive, respectively. The maximum allowable deviation from the mean measured value of any single “measurement data phase” reading must be less than or equal to  $\pm 2$  percent or  $\pm 1$  ppm for CO or  $\pm 0.5$  percent O<sub>2</sub>, whichever is less restrictive, respectively.

*10.2 Post-Sampling Calibration Check.* Conduct a stack gas post-sampling calibration check after the stack gas sampling run or set of runs and within 12 hours of the initial calibration. Conduct up-scale and zero calibration checks using the protocol in Section 10.1. Make no changes to the sampling system or EC cell calibration until all post-sampling calibration checks have been recorded. If either the zero or up-scale calibration error exceeds the respective specification in Sections 10.1.2 and 10.1.4 then all measurement data collected since the previous successful calibrations are invalid and re-calibration and re-sampling are required. If the sampling system is disassembled or the EC cell calibration is adjusted, repeat the calibration check before conducting the next analyzer sampling run.

## 11.0 Analytical Procedure

The analytical procedure is fully discussed in Section 8.

## 12.0 Calculations and Data Analysis

Determine the CO and O<sub>2</sub> concentrations for each stack gas sampling run by calculating the mean gas concentrations of the data recorded during the “measurement data phase”.

## 13.0 Protocol Performance

Use the following protocols to verify consistent analyzer performance during each field sampling day.

*13.1 Measurement Data Phase Performance Check.* Calculate the mean of the readings from the “measurement data phase”. The maximum allowable deviation from the mean for each of the individual readings is  $\pm 2$  percent, or  $\pm 1$  ppm, whichever is less restrictive. Record the mean value and maximum deviation for each gas monitored. Data must conform to Section 10.1.4. The EC cell flow rate must conform to the specification in Section 8.3.

*Example:* A measurement data phase is invalid if the maximum deviation of any single reading comprising that mean is greater than  $\pm 2$  percent or  $\pm 1$  ppm (the default criteria). For example, if the mean = 30 ppm, single readings of below 29 ppm and above 31 ppm are disallowed).

*13.2 Interference Check.* Before the initial use of the EC cell and interference gas scrubber in the field, and semi-annually thereafter, challenge the interference gas scrubber with NO and NO<sub>2</sub> gas standards that are generally recognized as representative of diesel-fueled engine NO and NO<sub>2</sub> emission values. Record the responses displayed by the CO EC cell and other pertinent data on Figure 1 or a similar form.

*13.2.1 Interference Response.* The combined NO and NO<sub>2</sub> interference response should be less than or equal to  $\pm 5$  percent of the up-scale CO calibration gas concentration.







# **APPENDIX C**

## Electronic Code of Federal Regulations

e-CFR data is current as of September 13, 2018

[Title 40](#) → [Chapter I](#) → [Subchapter C](#) → [Part 63](#) → [Subpart JJJJ](#)

---

[Browse Previous](#) | [Browse Next](#)

Title 40: Protection of Environment

[PART 63—NATIONAL EMISSION STANDARDS FOR HAZARDOUS AIR POLLUTANTS FOR SOURCE CATEGORIES \(CONTINUED\)](#)

---

### **Subpart JJJJ—National Emission Standards for Hazardous Air Pollutants for Brick and Structural Clay Products Manufacturing**

---

#### **Contents**

##### What This Subpart Covers

- [§63.8380](#) What is the purpose of this subpart?
- [§63.8385](#) Am I subject to this subpart?
- [§63.8390](#) What parts of my plant does this subpart cover?
- [§63.8395](#) When do I have to comply with this subpart?

##### Emission Limitations and Work Practice Standards

- [§63.8405](#) What emission limitations and work practice standards must I meet?
- [§63.8410](#) What are my options for meeting the emission limitations and work practice standards?

##### General Compliance Requirements

- [§63.8420](#) What are my general requirements for complying with this subpart?
- [§63.8425](#) What do I need to know about operation, maintenance, and monitoring plans?

##### Testing and Initial Compliance Requirements

- [§63.8435](#) By what date must I conduct performance tests?
- [§63.8440](#) When must I conduct subsequent performance tests?
- [§63.8445](#) How do I conduct performance tests and establish operating limits?
- [§63.8450](#) What are my monitoring installation, operation, and maintenance requirements?
- [§63.8455](#) How do I demonstrate initial compliance with the emission limitations and work practice standards?

##### Continuous Compliance Requirements

- [§63.8465](#) How do I monitor and collect data to demonstrate continuous compliance?
- [§63.8470](#) How do I demonstrate continuous compliance with the emission limitations and work practice standards?

## Notifications, Reports, and Records

- §63.8480 What notifications must I submit and when?
- §63.8485 What reports must I submit and when?
- §63.8490 What records must I keep?
- §63.8495 In what form and for how long must I keep my records?

## Other Requirements and Information

- §63.8505 What parts of the General Provisions apply to me?
- §63.8510 Who implements and enforces this subpart?
- §63.8515 What definitions apply to this subpart?
- Table 1 to Subpart JJJJ of Part 63—Emission Limits
- Table 1 to Subpart JJJJ of Part 63—Emission Limits
- Table 2 to Subpart JJJJ of Part 63—Operating Limits
- Table 3 to Subpart JJJJ of Part 63—Work Practice Standards
- Table 4 to Subpart JJJJ of Part 63—Requirements for Performance Tests
- Table 5 to Subpart JJJJ of Part 63—Initial Compliance With Emission Limitations and Work Practice Standards
- Table 6 to Subpart JJJJ of Part 63—Continuous Compliance With Emission Limitations and Work Practice Standards
- Table 7 to Subpart JJJJ of Part 63—Compliance Dates
- Table 8 to Subpart JJJJ of Part 63—Deadlines for Submitting Notifications
- Table 9 to Subpart JJJJ of Part 63—Requirements for Reports
- Table 10 to Subpart JJJJ of Part 63—Applicability of General Provisions to Subpart JJJJ

---

Source: 80 FR 65520, Oct. 26, 2015, unless otherwise noted.

[↑ Back to Top](#)

### What This Subpart Covers

[↑ Back to Top](#)

#### **§63.8380 What is the purpose of this subpart?**

This subpart establishes national emission limitations for hazardous air pollutants (HAP) emitted from brick and structural clay products (BSCP) manufacturing facilities. This subpart also establishes requirements to demonstrate initial and continuous compliance with the emission limitations.

[↑ Back to Top](#)

#### **§63.8385 Am I subject to this subpart?**

You are subject to this subpart if you own or operate a BSCP manufacturing facility that is, is located at, or is part of, a major source of HAP emissions according to the criteria in paragraphs (a) and (b) of this section.

(a) A BSCP manufacturing facility is a plant site that manufactures brick (including, but not limited to, face brick, structural brick, and brick pavers); clay pipe; roof tile; extruded floor and wall tile; and/or other extruded, dimensional clay products. Brick and structural clay products manufacturing facilities typically process raw clay and

shale, form the processed materials into bricks or shapes, and dry and fire the bricks or shapes. A plant site that manufactures refractory products, as defined in §63.9824, or clay ceramics, as defined in §63.8665, is not a BSCP manufacturing facility.

(b) A major source of HAP emissions is any stationary source or group of stationary sources within a contiguous area under common control that emits or has the potential to emit any single HAP at a rate of 9.07 megagrams (10 tons) or more per year or any combination of HAP at a rate of 22.68 megagrams (25 tons) or more per year.

[↑ Back to Top](#)

### **§63.8390 What parts of my plant does this subpart cover?**

(a) This subpart applies to each existing, new, or reconstructed affected source at a BSCP manufacturing facility.

(b) For the purposes of this subpart, the affected sources are described in paragraphs (b)(1) and (2) of this section.

(1) All tunnel kilns at a BSCP manufacturing facility are an affected source. For the remainder of this subpart, a tunnel kiln with a design capacity equal to or greater than 9.07 megagrams per hour (Mg/hr) (10 tons per hour (tph)) of fired product will be called a large tunnel kiln, and a tunnel kiln with a design capacity less than 9.07 Mg/hr (10 tph) of fired product will be called a small tunnel kiln.

(2) Each periodic kiln is an affected source.

(c) Process units not subject to the requirements of this subpart are listed in paragraphs (c)(1) through (4) of this section.

(1) Kilns that are used exclusively for setting glazes on previously fired products are not subject to the requirements of this subpart.

(2) Raw material processing and handling.

(3) Dryers.

(4) Sources covered by subparts KKKKK and SSSSS of this part.

(d) A source is a new affected source if construction of the affected source began after December 18, 2014, and you met the applicability criteria at the time you began construction.

(e) An affected source is reconstructed if you meet the criteria as defined in §63.2.

(f) An affected source is existing if it is not new or reconstructed.

[↑ Back to Top](#)

### **§63.8395 When do I have to comply with this subpart?**

(a) You must comply with this subpart no later than the compliance dates in Table 7 to this subpart.

(b) You must meet the notification requirements in §63.8480 according to the schedule in §63.8480 and in subpart A of this part. Some of the notifications must be submitted before you are required to comply with the emission limitations in this subpart.

[↑ Back to Top](#)



## Emission Limitations and Work Practice Standards

[↑ Back to Top](#)

### §63.8405 What emission limitations and work practice standards must I meet?

- (a) You must meet each emission limit in Table 1 to this subpart that applies to you.
- (b) You must meet each operating limit in Table 2 to this subpart that applies to you.
- (c) You must meet each work practice standard in Table 3 to this subpart that applies to you.

[↑ Back to Top](#)

### §63.8410 What are my options for meeting the emission limitations and work practice standards?

- (a) To meet the emission limitations in Tables 1 and 2 to this subpart, you must use one or more of the options listed in paragraphs (a)(1) and (2) of this section.
  - (1) *Emissions control system.* Use an emissions capture and collection system and an air pollution control device (APCD) and demonstrate that the resulting emissions meet the emission limits in Table 1 to this subpart, and that the capture and collection system and APCD meet the applicable operating limits in Table 2 to this subpart.
  - (2) *Process changes.* Use low-HAP raw materials or implement manufacturing process changes and demonstrate that the resulting emissions or emissions reductions meet the emission limits in Table 1 to this subpart.
- (b) To meet the work practice standards for affected periodic kilns, you must comply with the requirements listed in Table 3 to this subpart.
- (c) To meet the work practice standards for dioxins/furans for affected tunnel kilns, you must comply with the requirements listed in Table 3 to this subpart.
- (d) To meet the work practice standards for affected tunnel kilns during periods of startup and shutdown, you must comply with the requirements listed in Table 3 to this subpart.

[↑ Back to Top](#)

## General Compliance Requirements

[↑ Back to Top](#)

### §63.8420 What are my general requirements for complying with this subpart?

- (a) You must be in compliance with the emission limitations (including operating limits) in this subpart at all times, except during periods that you are approved for and in compliance with the alternative standard for routine control device maintenance as specified in paragraph (d) of this section, and except during periods of start-up and shutdown, at which time you must comply with the applicable work practice standard specified in Table 3 to this subpart.
- (b) At all times, you must operate and maintain any affected source, including associated air pollution control equipment and monitoring equipment, in a manner consistent with safety and good air pollution control practices for minimizing emissions. The general duty to minimize emissions does not require you to make any further efforts to reduce emissions if levels required by the applicable standard have been achieved. Determination of whether a

source is operating in compliance with operation and maintenance requirements will be based on information available to the Administrator which may include, but is not limited to, monitoring results, review of operation and maintenance procedures, review of operation and maintenance records, and inspection of the source. During the period between the compliance date specified for your affected source in §63.8395 and the date upon which continuous monitoring systems (CMS) (*e.g.*, continuous parameter monitoring systems) have been installed and verified and any applicable operating limits have been set, you must maintain a log detailing the operation and maintenance of the process and emissions control equipment.

(c) For each affected kiln that is subject to the emission limits specified in Table 1 to this subpart, you must prepare and implement a written operation, maintenance, and monitoring (OM&M) plan according to the requirements in §63.8425.

(d) If you own or operate an affected kiln that is subject to the emission limits specified in Table 1 to this subpart and must perform routine maintenance on the control device for that kiln, you may bypass the kiln control device and continue operating the kiln subject to the alternative standard established in this paragraph upon approval by the Administrator and provided you satisfy the conditions listed in paragraphs (d)(1) through (5) of this section.

(1) You must request to use the routine control device maintenance alternative standard from the Administrator no later than 120 calendar days before the compliance date specified in §63.8395. Your request must justify the need for the routine maintenance on the control device and the time required to accomplish the maintenance activities, describe the maintenance activities and the frequency of the maintenance activities, explain why the maintenance cannot be accomplished during kiln shutdowns, provide information stating whether the continued operation of the affected source will result in fewer emissions than shutting the source down while the maintenance is performed, describe how you plan to comply with paragraph (b) of this section during the maintenance, and provide any other documentation required by the Administrator.

(2) The routine control device maintenance must not exceed 4 percent of the annual operating uptime for each kiln.

(3) The request for the routine control device maintenance alternative standard, if approved by the Administrator, must be incorporated by reference in and attached to the affected source's title V permit.

(4) You must minimize HAP emissions during the period when the kiln is operating and the control device is offline by complying with the applicable standard in Table 3 to this subpart.

(5) You must minimize the time period during which the kiln is operating and the control device is offline.

(e) You must be in compliance with the work practice standards in this subpart at all times.

(f) You must be in compliance with the provisions of subpart A of this part, except as noted in Table 10 to this subpart.

[↑ Back to Top](#)

### **§63.8425 What do I need to know about operation, maintenance, and monitoring plans?**

(a) For each affected kiln that is subject to the emission limits specified in Table 1 to this subpart, you must prepare, implement, and revise as necessary an OM&M plan that includes the information in paragraph (b) of this section. Your OM&M plan must be available for inspection by the delegated authority upon request.

(b) Your OM&M plan must include, as a minimum, the information in paragraphs (b)(1) through (13) of this section.

- (1) Each process and APCD to be monitored, the type of monitoring device that will be used, and the operating parameters that will be monitored.
- (2) A monitoring schedule that specifies the frequency that the parameter values will be determined and recorded.
- (3) The limits for each parameter that represent continuous compliance with the emission limitations in §63.8405. The limits must be based on values of the monitored parameters recorded during performance tests.
- (4) Procedures for the proper operation and routine and long-term maintenance of each APCD, including a maintenance and inspection schedule that is consistent with the manufacturer's recommendations.
- (5) Procedures for installing the CMS sampling probe or other interface at a measurement location relative to each affected process unit such that the measurement is representative of control of the exhaust emissions (*e.g.*, on or downstream of the last APCD).
- (6) Performance and equipment specifications for the sample interface, the pollutant concentration or parametric signal analyzer, and the data collection and reduction system.
- (7) Continuous monitoring system performance evaluation procedures and acceptance criteria (*e.g.*, calibrations).
- (8) Procedures for the proper operation and maintenance of monitoring equipment consistent with the requirements in §§63.8450 and 63.8(c)(1), (3), (7), and (8).
- (9) Continuous monitoring system data quality assurance procedures consistent with the requirements in §63.8(d)(1) and (2). The owner or operator shall keep these written procedures on record for the life of the affected source or until the affected source is no longer subject to the provisions of this part, to be made available for inspection, upon request, by the Administrator. If the performance evaluation plan in §63.8(d)(2) is revised, the owner or operator shall keep previous (*i.e.*, superseded) versions of the performance evaluation plan on record to be made available for inspection, upon request, by the Administrator, for a period of 5 years after each revision to the plan. The program of corrective action should be included in the plan required under §63.8(d)(2).
- (10) Continuous monitoring system recordkeeping and reporting procedures consistent with the requirements in §§63.8485 and 63.8490.
- (11) Procedures for responding to operating parameter deviations, including the procedures in paragraphs (b)(11)(i) through (iii) of this section.
  - (i) Procedures for determining the cause of the operating parameter deviation.
  - (ii) Actions necessary for correcting the deviation and returning the operating parameters to the allowable limits.
  - (iii) Procedures for recording the times that the deviation began and ended and corrective actions were initiated and completed.
- (12) Procedures for keeping records to document compliance.
- (13) If you operate an affected kiln and you plan to take the kiln control device out of service for routine maintenance, as specified in §63.8420(d), the procedures specified in paragraphs (b)(13)(i) and (ii) of this section.
  - (i) Procedures for minimizing HAP emissions from the kiln during periods of routine maintenance of the kiln control device when the kiln is operating and the control device is offline.

(ii) Procedures for minimizing the duration of any period of routine maintenance on the kiln control device when the kiln is operating and the control device is offline.

(c) Changes to the operating limits in your OM&M plan require a new performance test. If you are revising an operating limit parameter value, you must meet the requirements in paragraphs (c)(1) and (2) of this section.

(1) Submit a notification of performance test to the Administrator as specified in §63.7(b).

(2) After completing the performance tests to demonstrate that compliance with the emission limits can be achieved at the revised operating limit parameter value, you must submit the performance test results and the revised operating limits as part of the Notification of Compliance Status required under §63.9(h).

(d) If you are revising the inspection and maintenance procedures in your OM&M plan, you do not need to conduct a new performance test.

[↑ Back to Top](#)

## Testing and Initial Compliance Requirements

[↑ Back to Top](#)

### **§63.8435 By what date must I conduct performance tests?**

For each affected kiln that is subject to the emission limits specified in Table 1 to this subpart, you must conduct performance tests within 180 calendar days after the compliance date that is specified for your source in §63.8395 and according to the provisions in §63.7(a)(2).

[↑ Back to Top](#)

### **§63.8440 When must I conduct subsequent performance tests?**

(a) For each affected kiln that is subject to the emission limits specified in Table 1 to this subpart, you must conduct a performance test before renewing your 40 CFR part 70 operating permit or at least every 5 years following the initial performance test.

(b) You must conduct a performance test when you want to change the parameter value for any operating limit specified in your OM&M plan.

[↑ Back to Top](#)

### **§63.8445 How do I conduct performance tests and establish operating limits?**

(a) You must conduct each performance test in Table 4 to this subpart that applies to you.

(b) Before conducting the performance test, you must install and calibrate all monitoring equipment.

(c) Each performance test must be conducted according to the requirements in §63.7 and under the specific conditions in Table 4 to this subpart.

(d) Performance tests shall be conducted under such conditions as the Administrator specifies to you based on representative performance of the affected source for the period being tested. Representative conditions exclude periods of startup and shutdown. You may not conduct performance tests during periods of malfunction. You must

record the process information that is necessary to document operating conditions during the test and include in such record an explanation to support that such conditions represent normal operation. Upon request, you shall make available to the Administrator such records as may be necessary to determine the conditions of performance tests.

(e) You must conduct at least three separate test runs for each performance test required in this section, as specified in §63.7(e)(3). Each test run must last at least 1 hour.

(f) You must use the data gathered during the performance test and the equations in paragraphs (f)(1) and (2) of this section to determine compliance with the emission limitations.

(1) To determine compliance with the production-based particulate matter (PM) and mercury (Hg) emission limits in Table 1 to this subpart, you must calculate your mass emissions per unit of production for each test run using Equation 1:

$$MP = \frac{ER}{P} \quad (\text{Eq. 1})$$

[View or download PDF](#)

Where:

MP = mass per unit of production, kilograms (pounds) of pollutant per megagram (ton) of fired product

ER = mass emission rate of pollutant (PM or Hg) during each performance test run, kilograms (pounds) per hour

P = production rate during each performance test run, megagrams (tons) of fired product per hour.

(2) To determine compliance with the health-based standard for acid gas HAP for BSCP manufacturing facilities in Table 1 to this subpart, you must:

(i) Calculate the HCl-equivalent emissions for HF, HCl, and Cl<sub>2</sub> for each tunnel kiln at your facility using Equation 2:

$$E_i = E_{HCl} + \left[ E_{HF} \left( \frac{RfC_{HCl}}{RfC_{HF}} \right) \right] + \left[ E_{Cl_2} \left( \frac{RfC_{HCl}}{RfC_{Cl_2}} \right) \right] \quad (\text{Eq. 2})$$

[View or download PDF](#)

Where:

E<sub>i</sub> = HCl-equivalent emissions for kiln i, kilograms (pounds) per hour

E<sub>HCl</sub> = emissions of HCl, kilograms (pounds) per hour

E<sub>HF</sub> = emissions of HF, kilograms (pounds) per hour

E<sub>Cl<sub>2</sub></sub> = emissions of Cl<sub>2</sub>, kilograms (pounds) per hour

RfC<sub>HCl</sub> = reference concentration for HCl, 20 micrograms per cubic meter

RfC<sub>HF</sub> = reference concentration for HF, 14 micrograms per cubic meter

RfC<sub>Cl<sub>2</sub></sub> = reference concentration for Cl<sub>2</sub>, 0.15 micrograms per cubic meter

(ii) If you have multiple tunnel kilns at your facility, sum the HCl-equivalent values for all tunnel kilns at the facility using Equation 3:

$$E_{total} = \sum_{i=1}^n E_i \quad (\text{Eq. 3})$$

[View or download PDF](#)

Where:

$E_{total}$  = HCl-equivalent emissions for total of all kilns at facility, kilograms (pounds) per hour

$E_i$  = HCl-equivalent emissions for kiln i, kilograms (pounds) per hour

n = number of tunnel kilns at facility

(iii) Compare this value to the health-based standard in Table 1 to this subpart.

(g) You must establish each site-specific operating limit in Table 2 to this subpart that applies to you as specified in paragraph (g)(1) of this section and in Table 4 to this subpart.

(1)(i) If you do not have an APCD installed on your kiln, calculate the maximum potential HCl-equivalent emissions for HF, HCl, and Cl<sub>2</sub> for each tunnel kiln at your facility using Equation 4:

$$E_{max,i} = (Cap_i) \left[ (MP_{iHCl}) + (MP_{iHF}) \left( \frac{RfC_{HCl}}{RfC_{HF}} \right) + (MP_{iCl_2}) \left( \frac{RfC_{HCl}}{RfC_{Cl_2}} \right) \right] \quad (\text{Eq. 4})$$

[View or download PDF](#)

Where:

$E_{max,i}$  = maximum potential HCl-equivalent emissions for kiln i, kilograms (pounds) per hour

$Cap_i$  = design capacity for kiln i, megagrams (tons) of fired product per hour

$MP_{iHCl}$  = mass of HCl per unit of production for kiln i, kilograms (pounds) of HCl per megagram (ton) of fired product

$MP_{iHF}$  = mass of HF per unit of production for kiln i, kilograms (pounds) of HF per megagram (ton) of fired product

$MP_{iCl_2}$  = mass of Cl<sub>2</sub> per unit of production for kiln i, kilograms (pounds) of Cl<sub>2</sub> per megagram (ton) of fired product

$RfC_{HCl}$  = reference concentration for HCl, 20 micrograms per cubic meter

$RfC_{HF}$  = reference concentration for HF, 14 micrograms per cubic meter

$RfC_{Cl_2}$  = reference concentration for Cl<sub>2</sub>, 0.15 micrograms per cubic meter

(ii) If you have multiple tunnel kilns at your facility, sum the maximum potential HCl-equivalent values for all tunnel kilns at the facility using Equation 5:

$$E_{max,total} = \sum_{i=1}^n E_{max,i} \quad (\text{Eq. 5})$$

[View or download PDF](#)

Where:

$E_{\max \text{ total}}$  = maximum potential HCl-equivalent emissions for total of all kilns at facility, kilograms (pounds) per hour

$E_{\max i}$  = maximum potential HCl-equivalent emissions for kiln i, kilograms (pounds) per hour

n = number of tunnel kilns at facility

(iii) If you have a single tunnel kiln at your facility and the total facility maximum potential HCl-equivalent emissions ( $E_{\max \text{ total}}$ ) are greater than the HCl-equivalent limit in Table 1 to this subpart, determine the maximum process rate for the tunnel kiln using Equation 6 that would ensure the total facility maximum potential HCl-equivalent emissions remain at or below the HCl-equivalent limit. The maximum process rate would become your operating limit for process rate and must be included in your OM&M plan.

$$P_{\max i} = \frac{\text{HCl - eq}}{\left[ (MP_{\text{HCl}}) + (MP_{\text{HF}}) \left( \frac{\text{RfC}_{\text{HCl}}}{\text{RfC}_{\text{HF}}} \right) + (MP_{\text{Cl}_2}) \left( \frac{\text{RfC}_{\text{HCl}}}{\text{RfC}_{\text{Cl}_2}} \right) \right]} \quad (\text{Eq. 6})$$

[View or download PDF](#)

Where:

$P_{\max i}$  = maximum process rate for kiln i, megagrams (tons) per hour

HCl-eq = HCl-equivalent limit in Table 1 to this subpart, 26 kilograms (57 pounds) per hour

$MP_{\text{HCl}}$  = mass of HCl per unit of production for kiln i, kilograms (pounds) of HCl per megagram (ton) of fired product

$MP_{\text{HF}}$  = mass of HF per unit of production for kiln i, kilograms (pounds) of HF per megagram (ton) of fired product

$MP_{\text{Cl}_2}$  = mass of  $\text{Cl}_2$  per unit of production for kiln i, kilograms (pounds) of  $\text{Cl}_2$  per megagram (ton) of fired product

$\text{RfC}_{\text{HCl}}$  = reference concentration for HCl, 20 micrograms per cubic meter

$\text{RfC}_{\text{HF}}$  = reference concentration for HF, 14 micrograms per cubic meter

$\text{RfC}_{\text{Cl}_2}$  = reference concentration for  $\text{Cl}_2$ , 0.15 micrograms per cubic meter

(iv) If you have multiple tunnel kilns at your facility and the total facility maximum potential HCl-equivalent emissions ( $E_{\max \text{ total}}$ ) are greater than the HCl-equivalent limit in Table 1 to this subpart, determine the combination of maximum process rates that would ensure that total facility maximum potential HCl-equivalent remains at or below the HCl-equivalent limit. The maximum process rates would become your operating limits for process rate and must be included in your OM&M plan.

(2) [Reserved]

(h) For each affected kiln that is subject to the emission limits specified in Table 1 to this subpart and is equipped with an APCD that is not addressed in Table 2 to this subpart or that is using process changes as a means of meeting

the emission limits in Table 1 to this subpart, you must meet the requirements in §63.8(f) and paragraphs (h)(1) and (2) of this section.

(1) Submit a request for approval of alternative monitoring procedures to the Administrator no later than the notification of intent to conduct a performance test. The request must contain the information specified in paragraphs (h)(1)(i) through (iv) of this section.

(i) A description of the alternative APCD or process changes.

(ii) The type of monitoring device or procedure that will be used.

(iii) The operating parameters that will be monitored.

(iv) The frequency that the operating parameter values will be determined and recorded to establish continuous compliance with the operating limits.

(2) Establish site-specific operating limits during the performance test based on the information included in the approved alternative monitoring procedures request and, as applicable, as specified in Table 4 to this subpart.

[↑ Back to Top](#)

#### **§63.8450 What are my monitoring installation, operation, and maintenance requirements?**

(a) You must install, operate, and maintain each CMS according to your OM&M plan and the requirements in paragraphs (a)(1) through (5) of this section.

(1) Conduct a performance evaluation of each CMS according to your OM&M plan.

(2) The CMS must complete a minimum of one cycle of operation for each successive 15-minute period. To have a valid hour of data, you must have at least three of four equally spaced data values (or at least 75 percent if you collect more than four data values per hour) for that hour (not including startup, shutdown, malfunction, out-of-control periods, or periods of routine control device maintenance covered by the routine control device maintenance alternative standard as specified in §63.8420(d)).

(3) Determine and record the 3-hour block averages of all recorded readings, calculated after every 3 hours of operation as the average of the previous 3 operating hours. To calculate the average for each 3-hour average period, you must have at least 75 percent of the recorded readings for that period (not including startup, shutdown, malfunction, out-of-control periods, or periods of routine control device maintenance covered by the routine control device maintenance alternative standard as specified in §63.8420(d)).

(4) Record the results of each inspection, calibration, and validation check.

(5) At all times, maintain the monitoring equipment including, but not limited to, maintaining necessary parts for routine repairs of the monitoring equipment.

(b) For each liquid flow measurement device, you must meet the requirements in paragraphs (a)(1) through (5) and paragraphs (b)(1) through (3) of this section.

(1) Locate the flow sensor in a position that provides a representative flowrate.

(2) Use a flow sensor with a minimum measurement sensitivity of 2 percent of the liquid flowrate.

(3) At least semiannually, conduct a flow sensor calibration check.



(c) For each pressure measurement device, you must meet the requirements in paragraphs (a)(1) through (5) and paragraphs (c)(1) through (7) of this section.

(1) Locate the pressure sensor(s) in or as close to a position that provides a representative measurement of the pressure.

(2) Minimize or eliminate pulsating pressure, vibration, and internal and external corrosion.

(3) Use a gauge with a minimum measurement sensitivity of 0.5 inch of water or a transducer with a minimum measurement sensitivity of 1 percent of the pressure range.

(4) Check the pressure tap daily to ensure that it is not plugged.

(5) Using a manometer, check gauge calibration quarterly and transducer calibration monthly.

(6) Any time the sensor exceeds the manufacturer's specified maximum operating pressure range, conduct calibration checks or install a new pressure sensor.

(7) At least monthly, inspect all components for integrity, all electrical connections for continuity, and all mechanical connections for leakage.

(d) For each pH measurement device, you must meet the requirements in paragraphs (a)(1) through (5) and paragraphs (d)(1) through (4) of this section.

(1) Locate the pH sensor in a position that provides a representative measurement of pH.

(2) Ensure the sample is properly mixed and representative of the fluid to be measured.

(3) Check the pH meter's calibration at one point daily.

(4) At least monthly, inspect all components for integrity and all electrical connections for continuity.

(e) For each bag leak detection system, you must meet the requirements in paragraphs (e)(1) through (11) of this section.

(1) Each triboelectric bag leak detection system must be installed, calibrated, operated, and maintained according to EPA-454/R-98-015, "Fabric Filter Bag Leak Detection Guidance," (incorporated by reference, see §63.14). Other types of bag leak detection systems must be installed, operated, calibrated, and maintained in a manner consistent with the manufacturer's written specifications and recommendations.

(2) The bag leak detection system must be certified by the manufacturer to be capable of detecting PM emissions at concentrations of 10 milligrams per actual cubic meter (0.0044 grains per actual cubic foot) or less.

(3) The bag leak detection system sensor must provide an output of relative PM loadings.

(4) The bag leak detection system must be equipped with a device to continuously record the output signal from the sensor.

(5) The bag leak detection system must be equipped with an audible alarm system that will sound automatically when an increase in relative PM emissions over a preset level is detected. The alarm must be located where it is easily heard by plant operating personnel.

(6) For positive pressure fabric filter systems, a bag leak detector must be installed in each baghouse compartment or cell.

(7) For negative pressure or induced air fabric filters, the bag leak detector must be installed downstream of the fabric filter.

(8) Where multiple detectors are required, the system's instrumentation and alarm may be shared among detectors.

(9) The baseline output must be established by adjusting the range and the averaging period of the device and establishing the alarm set points and the alarm delay time according to section 5.0 of the EPA-454/R-98-015, "Fabric Filter Bag Leak Detection Guidance," (incorporated by reference, see §63.14).

(10) Following initial adjustment of the system, the sensitivity or range, averaging period, alarm set points, or alarm delay time may not be adjusted except as detailed in your OM&M plan. In no case may the sensitivity be increased by more than 100 percent or decreased more than 50 percent over a 365-day period unless such adjustment follows a complete fabric filter inspection that demonstrates that the fabric filter is in good operating condition, as defined in section 5.2 of the "Fabric Filter Bag Leak Detection Guidance," (incorporated by reference, see §63.14). Record each adjustment.

(11) Record the results of each inspection, calibration, and validation check.

(f) For each lime, chemical, or carbon feed rate measurement device, you must meet the requirements in paragraphs (a)(1) through (5) and paragraphs (f)(1) and (2) of this section.

(1) Locate the measurement device in a position that provides a representative feed rate measurement.

(2) At least semiannually, conduct a calibration check.

(g) For each limestone feed system on a dry limestone adsorber (DLA), you must meet the requirements in paragraphs (a)(1), (4), and (5) of this section and must ensure on a monthly basis that the feed system replaces limestone at least as frequently as the schedule set during the performance test.

(h) For each temperature measurement device, you must meet the requirements in paragraphs (a)(1) through (5) and paragraphs (h)(1) through (3) of this section.

(1) Locate the measurement device in a position that provides a representative temperature.

(2) Use a measurement device with a minimum sensitivity of 1 percent of the temperature being measured.

(3) At least semiannually, conduct a calibration check.

(i) Requests for approval of alternate monitoring procedures must meet the requirements in §§63.8445(h) and 63.8(f).

[↑ Back to Top](#)

### **§63.8455 How do I demonstrate initial compliance with the emission limitations and work practice standards?**

(a) You must demonstrate initial compliance with each emission limitation and work practice standard that applies to you according to Table 5 to this subpart.

(b) You must establish each site-specific operating limit in Table 2 to this subpart that applies to you according to the requirements in §63.8445 and Table 4 to this subpart.

(c) You must submit the Notification of Compliance Status containing the results of the initial compliance demonstration according to the requirements in §63.8480(c).

[↑ Back to Top](#)

## **Continuous Compliance Requirements**

[↑ Back to Top](#)

### **§63.8465 How do I monitor and collect data to demonstrate continuous compliance?**

(a) You must monitor and collect data according to this section.

(b) Except for periods of monitor malfunctions, associated repairs, and required quality assurance or control activities (including, as applicable, calibration checks and required zero and span adjustments), you must monitor continuously (or collect data at all required intervals) at all times that the affected source is operating. This includes periods of startup, shutdown, malfunction, and routine control device maintenance as specified in §63.8420(d) when the affected source is operating.

(c) You may not use data recorded during monitoring malfunctions, associated repairs, out-of-control periods, or required quality assurance or control activities for purposes of calculating data averages. You must use all the valid data collected during all other periods in assessing compliance. Any averaging period for which you do not have valid monitoring data and such data are required constitutes a deviation from the monitoring requirements.

[↑ Back to Top](#)

### **§63.8470 How do I demonstrate continuous compliance with the emission limitations and work practice standards?**

(a) You must demonstrate continuous compliance with each emission limit, operating limit, and work practice standard in Tables 1, 2, and 3 to this subpart that applies to you according to the methods specified in Table 6 to this subpart.

(b) For each affected kiln that is subject to the emission limits specified in Table 1 to this subpart and is equipped with an APCD that is not addressed in Table 2 to this subpart, or that is using process changes as a means of meeting the emission limits in Table 1 to this subpart, you must demonstrate continuous compliance with each emission limit in Table 1 to this subpart, and each operating limit established as required in §63.8445(h)(2) according to the methods specified in your approved alternative monitoring procedures request, as described in §§63.8445(h)(1) and 63.8(f).

(c) You must report each instance in which you did not meet each emission limit and each operating limit in this subpart that applies to you. These instances are deviations from the emission limitations in this subpart. These deviations must be reported according to the requirements in §63.8485(c)(9).

(d) [Reserved]

(e)(1) *VE testing*. You must demonstrate continuous compliance with the operating limits in Table 2 to this subpart for visible emissions (VE) from tunnel kilns that are uncontrolled or equipped with DLA, dry lime injection fabric

filter (DIFF), dry lime scrubber/fabric filter (DLS/FF), or other dry control device by monitoring VE at each kiln stack according to the requirements in paragraphs (e)(1)(i) through (v) of this section.

(i) Perform daily VE observations of each kiln stack according to the procedures of Method 22 of 40 CFR part 60, appendix A-7. You must conduct the Method 22 test while the affected source is operating under normal conditions. The duration of each Method 22 test must be at least 15 minutes.

(ii) If VE are observed during any daily test conducted using Method 22 of 40 CFR part 60, appendix A-7, you must promptly conduct an opacity test, according to the procedures of Method 9 of 40 CFR part 60, appendix A-4. If opacity greater than 10 percent is observed, you must initiate and complete corrective actions according to your OM&M plan.

(iii) You may decrease the frequency of Method 22 testing from daily to weekly for a kiln stack if one of the conditions in paragraph (e)(1)(iii)(A) or (B) of this section is met.

(A) No VE are observed in 30 consecutive daily Method 22 tests for any kiln stack; or

(B) No opacity greater than 10 percent is observed during any of the Method 9 tests for any kiln stack.

(iv) If VE are observed during any weekly test and opacity greater than 10 percent is observed in the subsequent Method 9 test, you must promptly initiate and complete corrective actions according to your OM&M plan, resume testing of that kiln stack following Method 22 of 40 CFR part 60, appendix A-7, on a daily basis, as described in paragraph (e)(1)(i) of this section, and maintain that schedule until one of the conditions in paragraph (e)(1)(iii)(A) or (B) of this section is met, at which time you may again decrease the frequency of Method 22 testing to a weekly basis.

(v) If greater than 10 percent opacity is observed during any test conducted using Method 9 of 40 CFR part 60, appendix A-4, you must report these deviations by following the requirements in §63.8485.

(2) *Alternative to VE testing.* In lieu of meeting the requirements under paragraph (e)(1) of this section, you may conduct a PM test at least once every year following the initial performance test, according to the procedures of Method 5 of 40 CFR part 60, appendix A-3, and the provisions of §63.8445(e) and (f)(1).

[↑ Back to Top](#)

## Notifications, Reports, and Records

[↑ Back to Top](#)

### §63.8480 What notifications must I submit and when?

(a) You must submit all of the notifications in §§63.7(b) and (c), 63.8(f)(4), and 63.9(b) through (e), (g)(1), and (h) that apply to you, by the dates specified.

(b) You must submit all of the notifications specified in Table 8 to this subpart that apply to you, by the dates specified.

(c) If you are required to conduct a performance test or other initial compliance demonstration as specified in Tables 4 and 5 to this subpart, your Notification of Compliance Status as specified in Table 8 to this subpart must include the information in paragraphs (c)(1) through (3) of this section.

(1) The requirements in §63.9(h)(2)(i).

(2) The operating limit parameter values established for each affected source with supporting documentation and a description of the procedure used to establish the values.

(3) For each APCD that includes a fabric filter, if a bag leak detection system is used, analysis and supporting documentation demonstrating conformance with EPA guidance and specifications for bag leak detection systems in §63.8450(e).

[↑ Back to Top](#)

### **§63.8485 What reports must I submit and when?**

(a) You must submit each report in Table 9 to this subpart that applies to you.

(b) Unless the Administrator has approved a different schedule for submission of reports under §63.10(a), you must submit each report by the date in Table 9 to this subpart and as specified in paragraphs (b)(1) through (5) of this section.

(1) The first compliance report must cover the period beginning on the compliance date that is specified for your affected source in §63.8395 and ending on either June 30 or December 31. The first reporting period must be at least 6 months, but less than 12 months. For example, if your compliance date is March 1, then the first semiannual reporting period would begin on March 1 and end on December 31.

(2) The first compliance report must be postmarked or delivered no later than July 31 or January 31 for compliance periods ending on June 30 and December 31, respectively.

(3) Each subsequent compliance report must cover the semiannual reporting period from January 1 through June 30 or the semiannual reporting period from July 1 through December 31.

(4) Each subsequent compliance report must be postmarked or delivered no later than July 31 or January 31 for compliance periods ending on June 30 and December 31, respectively.

(5) For each affected source that is subject to permitting regulations pursuant to 40 CFR part 70 or 40 CFR part 71, if the permitting authority has established dates for submitting semiannual reports pursuant to 40 CFR 70.6(a)(3)(iii)(A) or 40 CFR 71.6(a)(3)(iii)(A), you may submit the first and subsequent compliance reports according to the dates the permitting authority has established instead of the dates in paragraphs (b)(1) through (4) of this section.

(c) The compliance report must contain the information in paragraphs (c)(1) through (8) of this section.

(1) Company name and address.

(2) Statement by a responsible official with that official's name, title, and signature, certifying that, based on information and belief formed after reasonable inquiry, the statements and information in the report are true, accurate, and complete.

(3) Date of report and beginning and ending dates of the reporting period.

(4) A description of control device maintenance performed while the control device was offline and the kiln controlled by the control device was operating, including the information specified in paragraphs (c)(4)(i) through (iii) of this section.

(i) The date and time when the control device was shut down and restarted.

(ii) Identification of the kiln that was operating and the number of hours that the kiln operated while the control device was offline.

(iii) A statement of whether or not the control device maintenance was included in your approved routine control device maintenance request developed as specified in §63.8420(d). If the control device maintenance was included in your approved routine control device maintenance request, then you must report the information in paragraphs (c)(4)(iii)(A) through (C) of this section.

(A) The total amount of time that the kiln controlled by the control device operated during the current semiannual compliance period and during the previous semiannual compliance period.

(B) The amount of time that each kiln controlled by the control device operated while the control device was offline for maintenance covered under the routine control device maintenance alternative standard during the current semiannual compliance period and during the previous semiannual compliance period.

(C) Based on the information recorded under paragraphs (c)(4)(iii)(A) and (B) of this section, compute the annual percent of kiln operating uptime during which the control device was offline for routine maintenance using Equation 7.

$$RM = \frac{DT_p + DT_c}{KU_p + KU_c} (100) \quad (\text{Eq. 7})$$

[View or download PDF](#)

Where:

RM = Annual percentage of kiln uptime during which control device was offline for routine control device maintenance

DT<sub>p</sub> = Control device downtime claimed under the routine control device maintenance alternative standard for the previous semiannual compliance period

DT<sub>c</sub> = Control device downtime claimed under the routine control device maintenance alternative standard for the current semiannual compliance period

KU<sub>p</sub> = Kiln uptime for the previous semiannual compliance period

KU<sub>c</sub> = Kiln uptime for the current semiannual compliance period

(5) A report of the most recent burner tune-up conducted to comply with the dioxin/furan work practice standard in Table 3 to this subpart.

(6) If there are no deviations from any emission limitations (emission limits or operating limits) that apply to you, the compliance report must contain a statement that there were no deviations from the emission limitations during the reporting period.

(7) If there were no periods during which the CMS was out-of-control as specified in your OM&M plan, the compliance report must contain a statement that there were no periods during which the CMS was out-of-control during the reporting period.

(8) The first compliance report must contain the startup push rate for each kiln, the minimum APCD inlet temperature for each APCD, and the temperature profile for each kiln without an APCD.

(9) For each deviation that occurs at an affected source, report such events in the compliance report by including the information in paragraphs (c)(9)(i) through (iii) of this section.

(i) The date, time, and duration of the deviation.

(ii) A list of the affected sources or equipment for which the deviation occurred.

(iii) An estimate of the quantity of each regulated pollutant emitted over any emission limit, and a description of the method used to estimate the emissions.

(d) For each deviation from an emission limitation (emission limit or operating limit) occurring at an affected source where you are using a CMS to comply with the emission limitations in this subpart, you must include the information in paragraphs (c)(1) through (4) and (c)(9), and paragraphs (d)(1) through (11) of this section. This includes periods of startup, shutdown, and routine control device maintenance.

(1) The total operating time of each affected source during the reporting period.

(2) The date and time that each CMS was inoperative, except for zero (low-level) and high-level checks.

(3) The date, time, and duration that each CMS was out-of-control, including the pertinent information in your OM&M plan.

(4) Whether each deviation occurred during routine control device maintenance covered in your approved routine control device maintenance alternative standard or during another period, and the cause of each deviation (including unknown cause, if applicable).

(5) A description of any corrective action taken to return the affected unit to its normal or usual manner of operation.

(6) A breakdown of the total duration of the deviations during the reporting period into those that were due to startup, shutdown, control equipment problems, process problems, other known causes, and other unknown causes.

(7) A summary of the total duration of CMS downtime during the reporting period and the total duration of CMS downtime as a percent of the total source operating time during that reporting period.

(8) A brief description of the process units.

(9) A brief description of the CMS.

(10) The date of the latest CMS certification or audit.

(11) A description of any changes in CMS, processes, or control equipment since the last reporting period.

(e) If you have obtained a title V operating permit according to 40 CFR part 70 or 40 CFR part 71, you must report all deviations as defined in this subpart in the semiannual monitoring report required by 40 CFR 70.6(a)(3)(iii)(A) or 40 CFR 71.6(a)(3)(iii)(A). If you submit a compliance report according to Table 9 to this subpart along with, or as part of, the semiannual monitoring report required by 40 CFR 70.6(a)(3)(iii)(A) or 40 CFR 71.6(a)(3)(iii)(A), and the compliance report includes all required information concerning deviations from any emission limitation (including any operating limit), then submitting the compliance report will satisfy any obligation to report the same deviations in the semiannual monitoring report. However, submitting a compliance report will not otherwise affect any obligation you may have to report deviations from permit requirements to the permitting authority.

(f) Within 60 calendar days after the date of completing each performance test (as defined in §63.2) required by this subpart, you must submit the results of the performance test following the procedure specified in either paragraph (f)(1) or (f)(2) of this section.

(1) For data collected using test methods supported by the EPA's Electronic Reporting Tool (ERT) as listed on the EPA's ERT Web site (<http://www.epa.gov/ttn/chief/ert/index.html>) at the time of the test, you must submit the results of the performance test to the EPA via the Compliance and Emissions Data Reporting Interface (CEDRI). (CEDRI can be accessed through the EPA's Central Data Exchange (CDX) (<http://cdx.epa.gov/>.) Performance test data must be submitted in a file format generated through the use of the EPA's ERT or an alternate electronic file format consistent with the extensible markup language (XML) schema listed on the EPA's ERT Web site. If you claim that some of the performance test information being submitted is confidential business information (CBI), you must submit a complete file generated through the use of the EPA's ERT or an alternate electronic file consistent with the XML schema listed on the EPA's ERT Web site, including information claimed to be CBI, on a compact disc, flash drive, or other commonly used electronic storage media to the EPA. The electronic media must be clearly marked as CBI and mailed to U.S. EPA/OAPQS/CORE CBI Office, Attention: Group Leader, Measurement Policy Group, MD C404-02, 4930 Old Page Rd., Durham, NC 27703. The same ERT or alternate file with the CBI omitted must be submitted to the EPA via the EPA's CDX as described earlier in this paragraph.

(2) For data collected using test methods that are not supported by the EPA's ERT as listed on the EPA's ERT Web site at the time of the test, you must submit the results of the performance test to the Administrator at the appropriate address listed in §63.13.

[↑ Back to Top](#)

### **§63.8490 What records must I keep?**

(a) You must keep the records listed in paragraphs (a)(1) through (3) of this section.

(1) A copy of each notification and report that you submitted to comply with this subpart, including all documentation supporting any Initial Notification or Notification of Compliance Status that you submitted, according to the requirements in §63.10(b)(2)(xiv).

(2) Records of performance tests as required in §63.10(b)(2)(viii).

(3) Records relating to control device maintenance and documentation of your approved routine control device maintenance request, if you request to use the alternative standard under §63.8420(d).

(b) You must keep the records required in Table 6 to this subpart to show continuous compliance with each emission limitation and work practice standard that applies to you.

(c) You must also maintain the records listed in paragraphs (c)(1) through (11) of this section.

(1) For each bag leak detection system, records of each alarm, the time of the alarm, the time corrective action was initiated and completed, and a brief description of the cause of the alarm and the corrective action taken.

(2) For each deviation, record the information in paragraphs (c)(2)(i) through (iv) of this section.

(i) The date, time, and duration of the deviation.

(ii) A list of the affected sources or equipment.



- (iii) An estimate of the quantity of each regulated pollutant emitted over any emission limit and a description of the method used to estimate the emissions.
  - (iv) Actions taken to minimize emissions in accordance with §63.8420(b) and any corrective actions taken to return the affected unit to its normal or usual manner of operation.
- (3) For each affected source, records of production rates on a fired-product basis.
  - (4) Records for any approved alternative monitoring or test procedures.
  - (5) Records of maintenance and inspections performed on the APCD.
  - (6) Current copies of your OM&M plan, including any revisions, with records documenting conformance.
  - (7) Logs of the information required in paragraphs (c)(7)(i) through (iii) of this section to document proper operation of your periodic kiln.
    - (i) Records of the firing time and temperature cycle for each product produced in each periodic kiln. If all periodic kilns use the same time and temperature cycles, one copy may be maintained for each kiln. Reference numbers must be assigned to use in log sheets.
    - (ii) For each periodic kiln, a log that details the type of product fired in each batch, the corresponding time and temperature protocol reference number, and an indication of whether the appropriate time and temperature cycle was fired.
    - (iii) For each periodic kiln, a log of the actual tonnage of product fired in the periodic kiln and an indication of whether the tonnage was below the maximum tonnage for that specific kiln.
  - (8) Logs of the maintenance procedures used to demonstrate compliance with the maintenance requirements of the periodic kiln work practice standards specified in Table 3 to this subpart.
  - (9) Records of burner tune-ups used to comply with the dioxin/furan work practice standard for tunnel kilns.
  - (10) For periods of startup and shutdown, records of the following information:
    - (i) The date, time, and duration of each startup and/or shutdown period, recording the periods when the affected source was subject to the standard applicable to startup and shutdown.
    - (ii) For periods of startup, the kiln push rate and kiln exhaust temperature prior to the time the kiln exhaust reaches the minimum APCD inlet temperature (for a kiln with an APCD) or the kiln temperature profile is attained (for a kiln with no APCD).
    - (iii) For periods of shutdown, the kiln push rate and kiln exhaust temperature after the time the kiln exhaust falls below the minimum APCD inlet temperature (for a kiln with an APCD) or the kiln temperature profile is no longer maintained (for a kiln with no APCD).
  - (11) All site-specific parameters, temperature profiles, and procedures required to be established or developed according to the applicable work practice standards in Table 3 to this subpart.

[↑ Back to Top](#)

### **§63.8495 In what form and for how long must I keep my records?**

(a) Your records must be in a form suitable and readily available for expeditious review, according to §63.10(b)(1).

(b) As specified in §63.10(b)(1), you must keep each record for 5 years following the date of each occurrence, measurement, maintenance, corrective action, report, or record.

(c) You must keep each record onsite for at least 2 years after the date of each occurrence, measurement, maintenance, corrective action, report, or record, according to §63.10(b)(1). You may keep the records offsite for the remaining 3 years.

[↑ Back to Top](#)

## **Other Requirements and Information**

[↑ Back to Top](#)

### **§63.8505 What parts of the General Provisions apply to me?**

Table 10 to this subpart shows which parts of the General Provisions in §§63.1 through 63.16 apply to you.

[↑ Back to Top](#)

### **§63.8510 Who implements and enforces this subpart?**

(a) This subpart can be implemented and enforced by us, the U.S. EPA, or a delegated authority such as your state, local, or tribal agency. If the U.S. EPA Administrator has delegated authority to your state, local, or tribal agency, then that agency, in addition to the U.S. EPA, has the authority to implement and enforce this subpart. You should contact your U.S. EPA Regional Office to find out if implementation and enforcement of this subpart is delegated to your state, local, or tribal agency.

(b) In delegating implementation and enforcement authority of this subpart to a state, local, or tribal agency under subpart E of this part, the authorities contained in paragraph (c) of this section are retained by the Administrator of the U.S. EPA and are not transferred to the state, local, or tribal agency.

(c) The authorities that cannot be delegated to state, local, or tribal agencies are as specified in paragraphs (c)(1) through (6) of this section.

(1) Approval of alternatives to the applicability requirements in §§63.8385 and 63.8390, the compliance date requirements in §63.8395, and the non-opacity emission limitations in §63.8405.

(2) Approval of major changes to test methods under §63.7(e)(2)(ii) and (f) and as defined in §63.90.

(3) Approval of major changes to monitoring under §63.8(f) and as defined in §63.90.

(4) Approval of major changes to recordkeeping and reporting under §63.10(f) and as defined in §63.90.

(5) Approval of an alternative to any electronic reporting to the EPA required by this subpart.

(6) Approval of a routine control device maintenance request under §63.8420(d).

[↑ Back to Top](#)

### **§63.8515 What definitions apply to this subpart?**

Terms used in this subpart are defined in the Clean Air Act, in §63.2, and in this section as follows:

*Air pollution control device (APCD)* means any equipment that reduces the quantity of a pollutant that is emitted to the air.

*Bag leak detection system* means an instrument that is capable of monitoring PM loadings in the exhaust of a fabric filter in order to detect bag failures. A bag leak detection system includes, but is not limited to, an instrument that operates on triboelectric, light-scattering, light-transmittance, or other effects to monitor relative PM loadings.

*Brick and structural clay products (BSCP) manufacturing facility* means a plant site that manufactures brick (including, but not limited to, face brick, structural brick, and brick pavers); clay pipe; roof tile; extruded floor and wall tile; and/or other extruded, dimensional clay products. Brick and structural clay products manufacturing facilities typically process raw clay and shale, form the processed materials into bricks or shapes, and dry and fire the bricks or shapes. A plant site that manufactures refractory products, as defined in 40 CFR 63.9824, or clay ceramics, as defined in 40 CFR 63.8665, is not a BSCP manufacturing facility.

*Deviation* means any instance in which an affected source subject to this subpart, or an owner or operator of such a source:

- (1) Fails to meet any requirement or obligation established by this subpart including, but not limited to, any emission limitation (including any operating limit) or work practice standard; or
- (2) Fails to meet any term or condition that is adopted to implement an applicable requirement in this subpart for any affected source required to obtain such a permit.

*Dry lime injection fabric filter (DIFF)* means an APCD that includes continuous injection of hydrated lime or other sorbent into a duct or reaction chamber followed by a fabric filter.

*Dry lime scrubber/fabric filter (DLS/FF)* means an APCD that includes continuous injection of humidified hydrated lime or other sorbent into a reaction chamber followed by a fabric filter. These systems typically include recirculation of some of the sorbent.

*Dry limestone adsorber (DLA)* means an APCD that includes a limestone storage bin, a reaction chamber that is essentially a packed tower filled with limestone, and may or may not include a peeling drum that mechanically scrapes reacted limestone to regenerate the stone for reuse.

*Emission limitation* means any emission limit or operating limit.

*Fabric filter* means an APCD used to capture PM by filtering a gas stream through filter media; also known as a baghouse.

*Initial startup* means:

- (1) For a new or reconstructed tunnel kiln controlled with a DLA, the time at which the temperature in the kiln first reaches 260 °C (500 °F) and the kiln contains product; or
- (2) for a new or reconstructed tunnel kiln controlled with a DIFF, DLS/FF, or wet scrubber (WS), the time at which the kiln first reaches a level of production that is equal to 75 percent of the kiln design capacity or 12 months after the affected source begins firing BSCP, whichever is earlier.

*Fired product* means brick or structural clay products that have gone through the firing process via kilns.

*Kiln exhaust process stream* means the portion of the exhaust from a tunnel kiln that exhausts directly to the atmosphere (or to an APCD), rather than to a sawdust dryer.

*Large tunnel kiln* means a tunnel kiln (existing, new, or reconstructed) with a design capacity equal to or greater than 9.07 Mg/hr (10 tph) of fired product.

*Minimum APCD inlet temperature* means the minimum temperature that kiln exhaust can be vented to the APCD that ensures the long-term integrity of the APCD.

*Particulate matter (PM)* means, for purposes of this subpart, emissions of PM that serve as a measure of total particulate emissions, as measured by Method 5 (40 CFR part 60, appendix A-3) or Method 29 (40 CFR part 60, appendix A-8), and as a surrogate for non-mercury metal HAP contained in the particulates including, but not limited to, antimony, arsenic, beryllium, cadmium, chromium, cobalt, lead, manganese, nickel, and selenium.

*Periodic kiln* means a batch firing kiln.

*Plant site* means all contiguous or adjoining property that is under common control, including properties that are separated only by a road or other public right-of-way. Common control includes properties that are owned, leased, or operated by the same entity, parent entity, subsidiary, or any combination thereof.

*Responsible official* means responsible official as defined in 40 CFR 70.2.

*Small tunnel kiln* means a tunnel kiln (existing, new, or reconstructed) with a design capacity less than 9.07 Mg/hr (10 tph) of fired product.

*Startup* means the setting in operation of an affected source and starting the production process.

*Startup push rate* means the kiln push rate required to bring the kiln to the proper operating temperature during startup.

*Tunnel kiln* means any continuous kiln that is used to fire BSCP. Some tunnel kilns have two process streams, including a process stream that exhausts directly to the atmosphere or to an APCD, and a process stream in which the kiln exhaust is ducted to a sawdust dryer where it is used to dry sawdust before being emitted to the atmosphere.

*Tunnel kiln design capacity* means the maximum amount of brick, in Mg (tons), that a kiln is designed to produce in one year divided by the number of hours in a year (8,760 hours), taking into account the void space in the brick, the push rate for the kiln, and the stacking pattern, if applicable. If a kiln is modified to increase the capacity, the design capacity is considered to be the capacity following modifications.

*Wet scrubber (WS)* means an APCD that uses water, which may include caustic additives or other chemicals, as the sorbent. Wet scrubbers may use any of various design mechanisms to increase the contact between exhaust gases and the sorbent.

*Work practice standard* means any design, equipment, work practice, operational standard, or combination thereof, that is promulgated pursuant to section 112(h) of the Clean Air Act.

Tables to Subpart JJJJ of Part 63

[↑ Back to Top](#)

### **Table 1 to Subpart JJJJ of Part 63—Emission Limits**

As stated in §63.8405, you must meet each emission limit in the following table that applies to you:

**Table 1 to Subpart JJJJJ of Part 63—Emission Limits**

<b>For each . . .</b>	<b>You must meet the following emission limits . . .</b>	<b>Or you must comply with the following . . .</b>
1. Collection of all tunnel kilns at facility, including all process streams	HF, HCl, and Cl <sub>2</sub> emissions must not exceed 26 kg/hr (57 lb/hr) HCl equivalent, under the health-based standard, as determined using Equations 2 and 3	Not applicable.
2. Existing large tunnel kiln (design capacity ≥10 tons per hour (tph) of fired product), including all process streams	a. PM emissions must not exceed 0.018 kg/Mg (0.036 lb/ton) of fired product	i. PM emissions must not exceed 6.6 mg/dscm (0.0029 gr/dscf) at 17% O <sub>2</sub> ; or ii. Non-Hg HAP metals emissions must not exceed 0.0026 kg/hr (0.0057 lb/hr).
	b. Hg emissions must not exceed 2.1 E-05 kilogram per megagram (kg/Mg) (4.1 E-05 pound per ton (lb/ton)) of fired product	i. Hg emissions must not exceed 7.7 micrograms per dry standard cubic meter (µg/dscm) at 17% O <sub>2</sub> ; or
		ii. Hg emissions must not exceed 2.5 E-04 kg/hr (5.5 E-04 lb/hr).
3. Existing small tunnel kiln (design capacity <10 tph of fired product), including all process streams	a. PM emissions must not exceed 0.19 kg/Mg (0.37 lb/ton) of fired product	i. PM emissions must not exceed 4.8 mg/dscm (0.0021 gr/dscf) at 17% O <sub>2</sub> ; or ii. Non-Hg HAP metals emissions must not exceed 0.047 kg/hr (0.11 lb/hr).
	b. Hg emissions must not exceed 1.7 E-04 kg/Mg (3.3 E-04 lb/ton) of fired product	i. Hg emissions must not exceed 91 µg/dscm at 17% O <sub>2</sub> ; or
		ii. Hg emissions must not exceed 8.5 E-04 kg/hr (0.0019 lb/hr).
4. New or reconstructed large tunnel kiln (design capacity ≥10 tph of fired product), including all process streams	a. PM emissions must not exceed 0.0089 kg/Mg (0.018 lb/ton) of fired product.	i. PM emissions must not exceed 3.2 mg/dscm (0.0014 gr/dscf) at 17% O <sub>2</sub> ; or ii. Non-Hg HAP metals emissions must not exceed 0.0026 kg/hr (0.0057 lb/hr) of

		fired product.
	b. Hg emissions must not exceed 1.4 E-05 kg/Mg (2.8 E-05 lb/ton) of fired product	i. Hg emissions must not exceed 6.2 µg/dscm at 17% O <sub>2</sub> .
		ii. Hg emissions must not exceed 1.6 E-04 kg/hr (3.4 E-04 lb/hr).
5. New or reconstructed small tunnel kiln (design capacity <10 tph of fired product), including all process streams	a. PM emissions must not exceed 0.015 kg/Mg (0.030 lb/ton) of fired product	i. PM emissions must not exceed 4.7 mg/dscm (0.0021 gr/dscf) at 17% O <sub>2</sub> ; or ii. Non-Hg HAP metals emissions must not exceed 0.047 kg/hr (0.11 lb/hr) of fired product.
	b. Hg emissions must not exceed 1.7 E-04 kg/Mg (3.3 E-04 lb/ton) of fired product	i. Hg emissions must not exceed 91 µg/dscm at 17% O <sub>2</sub> .
		ii. Hg emissions must not exceed 8.5 E-04 kg/hr (0.0019 lb/hr).

[↑ Back to Top](#)

**Table 2 to Subpart JJJJJ of Part 63—Operating Limits**

As stated in §63.8405, you must meet each operating limit in the following table that applies to you:

<b>For each . . .</b>	<b>You must . . .</b>
1. Tunnel kiln equipped with a DLA	a. Maintain the average pressure drop across the DLA for each 3-hour block period at or above the average pressure drop established during the HF/HCl/Cl <sub>2</sub> performance test; or, if you are monitoring the bypass stack damper position, initiate corrective action within 1 hour after the bypass damper is opened allowing the kiln exhaust gas to bypass the DLA and complete corrective action in accordance with your OM&M plan; and
	b. Maintain an adequate amount of limestone in the limestone hopper, storage bin (located at the top of the DLA), and DLA at all times; maintain the limestone feeder setting (on a per ton of fired product basis) at or above the level established during the HF/HCl/Cl <sub>2</sub> performance test in which compliance was demonstrated; and
	c. Use the same grade of limestone from the same source as was used during the HF/HCl/Cl <sub>2</sub> performance test in which compliance was demonstrated; maintain records of the source and grade of limestone; and

	d. Maintain no VE from the DLA stack.
2. Tunnel kiln equipped with a DIFF or DLS/FF	a. If you use a bag leak detection system, initiate corrective action within 1 hour of a bag leak detection system alarm and complete corrective actions in accordance with your OM&M plan; operate and maintain the fabric filter such that the alarm is not engaged for more than 5 percent of the total operating time in a 6-month block reporting period; or maintain no VE from the DIFF or DLS/FF stack; and
	b. Maintain free-flowing lime in the feed hopper or silo and to the APCD at all times for continuous injection systems; maintain the feeder setting (on a per ton of fired product basis) at or above the level established during the HF/HCl/Cl <sub>2</sub> performance test for continuous injection systems in which compliance was demonstrated.
3. Tunnel kiln equipped with a WS	a. Maintain the average scrubber liquid pH for each 3-hour block period at or above the average scrubber liquid pH established during the HF/HCl/Cl <sub>2</sub> performance test in which compliance was demonstrated; and
	b. Maintain the average scrubber liquid flow rate for each 3-hour block period at or above the highest average scrubber liquid flow rate established during the HF/HCl/Cl <sub>2</sub> and PM/non-Hg HAP metals performance tests in which compliance was demonstrated.
4. Tunnel kiln equipped with an ACI system	Maintain the average carbon flow rate for each 3-hour block period at or above the average carbon flow rate established during the Hg performance test in which compliance was demonstrated.
5. Tunnel kiln with no add-on control	a. Maintain no VE from the stack. b. Maintain the kiln process rate at or below the kiln process rate determined according to §63.8445(g)(1).

[↑ Back to Top](#)

**Table 3 to Subpart JJJJJ of Part 63—Work Practice Standards**

As stated in §63.8405, you must meet each work practice standard in the following table that applies to you:

<b>For each . . .</b>	<b>You must . . .</b>	<b>According to the following requirements . . .</b>
1. Existing, new or reconstructed periodic kiln	a. Minimize HAP emissions	i. Develop and use a designed firing time and temperature cycle for each periodic kiln. You must either program the time and temperature cycle into your kiln or track each step on a log sheet; and
		ii. Label each periodic kiln with the maximum load (in tons) of product that can be fired in the kiln during a single firing cycle; and

		iii. For each firing load, document the total tonnage of product placed in the kiln to ensure that it is not greater than the maximum load identified in item 1b; and
		iv. Develop and follow maintenance procedures for each kiln that, at a minimum, specify the frequency of inspection and maintenance of temperature monitoring devices, controls that regulate air-to-fuel ratios, and controls that regulate firing cycles; and
		v. Develop and maintain records for each periodic kiln, as specified in §63.8490.
2. Existing, new or reconstructed tunnel kiln	a. Minimize dioxin/furan emissions	i. Maintain and inspect the burners and associated combustion controls (as applicable); and
		ii. Tune the specific burner type to optimize combustion.
3. Existing, new or reconstructed tunnel kiln during periods of startup	a. Minimize HAP emissions	i. Establish the startup push rate for each kiln, the minimum APCD inlet temperature for each APCD, and temperature profile for each kiln without an APCD and include them in your first compliance report, as specified in §63.8485(c)(8); and
		ii. After initial charging of the kiln with loaded kiln cars, remain at or below the startup push rate for the kiln until the kiln exhaust reaches the minimum APCD inlet temperature for a kiln with an APCD or until the kiln temperature profile is attained for a kiln with no APCD; and
		iii. If your kiln has an APCD, begin venting the exhaust from the kiln through the APCD by the time the kiln exhaust temperature reaches the minimum APCD inlet temperature.
4. Existing, new or reconstructed tunnel kiln during periods of shutdown	a. Minimize HAP emissions	i. Do not push loaded kiln cars into the kiln once the kiln exhaust temperature falls below the minimum APCD inlet temperature if the kiln is controlled by an APCD or when the kiln temperature profile is no longer maintained for an uncontrolled kiln; and
		ii. If your kiln has an APCD, continue to vent the exhaust from the kiln through the APCD until the kiln exhaust temperature falls below the minimum inlet temperature for the APCD.
5. Existing, new or reconstructed tunnel kiln during periods of routine	a. Minimize HAP emissions.	i. Develop and use a temperature profile for each kiln; and ii. Develop and follow maintenance procedures for each kiln that, at a minimum, specify the frequency of inspection and maintenance of



control device maintenance		temperature monitoring devices and controls that regulate air-to-fuel ratios; and
		iii. Develop and maintain records for each kiln, as specified in §63.8490(a)(3).

As stated in §63.8445, you must conduct each performance test in the following table that applies to you:

[↑ Back to Top](#)

**Table 4 to Subpart JJJJJ of Part 63—Requirements for Performance Tests**

As stated in §63.8445, you must conduct each performance test in the following table that applies to you:

For each . . .	You must . . .	Using . . .	According to the following requirements . . .
1. Tunnel kiln	a. Select locations of sampling ports and the number of traverse points	Method 1 or 1A of 40 CFR part 60, appendix A-1	Sampling sites must be located at the outlet of the APCD and prior to any releases to the atmosphere for all affected sources.
	b. Determine velocities and volumetric flow rate	Method 2 of 40 CFR part 60, appendix A-1	You may use Method 2A, 2C, 2D, or 2F of 40 CFR part 60, appendix A-1, or Method 2G of 40 CFR part 60, appendix A-2, as appropriate, as an alternative to using Method 2 of 40 CFR part 60, appendix A-1.
	c. Conduct gas molecular weight analysis	Method 3 of 40 CFR part 60, appendix A-2	You may use Method 3A or 3B of 40 CFR part 60, appendix A-2, as appropriate, as an alternative to using Method 3 of 40 CFR part 60, appendix A-2. ANSI/ASME PTC 19.10-1981 (incorporated by reference, see §63.14) may be used as an alternative to the manual procedures (but not the instrumental procedures) in Methods 3A and 3B.
	d. Measure moisture content of the stack gas	Method 4 of 40 CFR part 60, appendix A-3	
	e. Measure HF, HCl and Cl <sub>2</sub> emissions	i. Method 26A of 40 CFR part 60, appendix A-8; or	You may use Method 26 of 40 CFR part 60, appendix A-8, as an alternative to using Method 26A of 40 CFR part 60, appendix A-8, when no acid PM ( <i>e.g.</i> , HF or HCl dissolved in water droplets emitted by sources controlled by a WS) is present. ASTM D6735-01 (Reapproved 2009) (incorporated by reference,

			see §63.14) may be used as an alternative to Methods 26 and 26A.
		ii. Method 320 of appendix A of this part	When using Method 320 of appendix A of this part, you must follow the analyte spiking procedures of section 13 of Method 320 of appendix A of this part, unless you can demonstrate that the complete spiking procedure has been conducted at a similar source. ASTM D6348-03 (Reapproved 2010) (incorporated by reference, see §63.14) may be used as an alternative to Method 320 if the test plan preparation and implementation in Annexes A1-A8 are mandatory and the %R in Annex A5 is determined for each target analyte.
	f. Measure PM emissions or non-Hg HAP metals	i. For PM only: Method 5 of 40 CFR part 60, appendix A-3; or	
		ii. For PM or non-Hg HAP metals: Method 29 of 40 CFR part 60, appendix A-8	
	g. Measure Hg emissions	Method 29 of 40 CFR part 60, appendix A-8	ASTM D6784-02 (Reapproved 2008) (incorporated by reference, see §63.14) may be used as an alternative to Method 29 (portion for Hg only).
2. Tunnel kiln with no add-on control	Establish the operating limit(s) for kiln process rate if the total facility maximum potential HCl-equivalent emissions are greater than the HCl-equivalent limit in Table 1 to this subpart	HCl-equivalent limit in Table 1 to this subpart and emissions and production data from the HF/HCl/Cl <sub>2</sub> performance test	Using the procedures in §63.8445(g)(1), you must determine the maximum process rate(s) for your kiln(s) that would ensure total facility maximum potential HCl-equivalent emissions remain at or below the HCl-equivalent limit in Table 1 to this subpart. The maximum process rate(s) would become your site-specific process rate operating limit(s).
3. Tunnel kiln that is complying with PM and/or Hg production-based emission	Determine the production rate during each PM/Hg test run in order to determine compliance with PM and/or Hg production-based	Production data collected during the PM/Hg performance tests (e.g., no. of pushes per hour, no. of bricks per kiln car, weight of a	You must measure and record the production rate, on a fired-product basis, of the affected source for each of the three test runs.

limits	emission limits	typical fired brick)	
4. Tunnel kiln equipped with a DLA	a. Establish the operating limit for the average pressure drop across the DLA	Data from the pressure drop measurement device during the HF/HCl/Cl <sub>2</sub> performance test	You must continuously measure the pressure drop across the DLA, determine and record the block average pressure drop values for the three test runs, and determine and record the 3-hour block average of the recorded pressure drop measurements for the three test runs. The average of the three test runs establishes your minimum site-specific pressure drop operating limit.
	b. Establish the operating limit for the limestone feeder setting	Data from the limestone feeder during the HF/HCl/Cl <sub>2</sub> performance test	You must ensure that you maintain an adequate amount of limestone in the limestone hopper, storage bin (located at the top of the DLA), and DLA at all times during the performance test. You must establish your limestone feeder setting, on a per ton of fired product basis, one week prior to the performance test and maintain the feeder setting for the one-week period that precedes the performance test and during the performance test.
	c. Document the source and grade of limestone used	Records of limestone purchase	
5. Tunnel kiln equipped with a DIFF or DLS/FF	Establish the operating limit for the lime feeder setting	Data from the lime feeder during the HF/HCl/Cl <sub>2</sub> performance test	For continuous lime injection systems, you must ensure that lime in the feed hopper or silo and to the APCD is free-flowing at all times during the performance test and record the feeder setting, on a per ton of fired product basis, for the three test runs. If the feed rate setting varies during the three test runs, determine and record the average feed rate from the three test runs. The average of the three test runs establishes your minimum site-specific feed rate operating limit.
6. Tunnel kiln equipped with a WS	a. Establish the operating limit for the average scrubber liquid pH	Data from the pH measurement device during the performance HF/HCl/Cl <sub>2</sub> performance test	You must continuously measure the scrubber liquid pH, determine and record the block average pH values for the three test runs, and determine and record the 3-hour block average of the recorded pH measurements for the three test runs. The average of the three test runs

			establishes your minimum site-specific liquid pH operating limit.
	b. Establish the operating limit for the average scrubber liquid flow rate	Data from the flow rate measurement device during the HF/HCl/Cl <sub>2</sub> and PM/non-Hg HAP metals performance tests	You must continuously measure the scrubber liquid flow rate, determine and record the block average flow rate values for the three test runs, and determine and record the 3-hour block average of the recorded flow rate measurements for the three test runs. The average of the three test runs establishes your minimum site-specific liquid flow rate operating level. If different average wet scrubber liquid flow rate values are measured during the HF/HCl/Cl <sub>2</sub> and PM/non-Hg HAP metals tests, the highest of the average values become your site-specific operating limit.
7. Tunnel kiln equipped with an ACI system	Establish the operating limit for the average carbon flow rate	Data from the carbon flow rate measurement conducted during the Hg performance test	You must measure the carbon flow rate during each test run, determine and record the block average carbon flow rate values for the three test runs, and determine and record the 3-hour block average of the recorded carbon flow rate measurements for the three test runs. The average of the three test runs establishes your minimum site-specific activated carbon flow rate operating limit.

[↑ Back to Top](#)

**Table 5 to Subpart JJJJJ of Part 63—Initial Compliance With Emission Limitations and Work Practice Standards**

As stated in §63.8455, you must demonstrate initial compliance with each emission limitation and work practice standard that applies to you according to the following table:

<b>For each . . .</b>	<b>For the following . . .</b>	<b>You have demonstrated initial compliance if . . .</b>
1. Collection of all tunnel kilns at the facility, including all process streams	a. HF, HCl, and Cl <sub>2</sub> emissions must not exceed 26 kg/hr (57 lb/hr) HCl equivalent	i. You measure HF, HCl, and Cl <sub>2</sub> emissions for each kiln using Method 26 or 26A of 40 CFR part 60, appendix A-8 or its alternative, ASTM D6735-01 (Reapproved 2009) (incorporated by reference, see §63.14); or Method 320 of appendix A of this part or its alternative, ASTM D6348-03 (Reapproved 2010) (incorporated by reference, see §63.14); and

		ii. You calculate the HCl-equivalent emissions for each kiln using Equation 2 to this subpart; and
		iii. You sum the HCl-equivalent values for all kilns at the facility using Equation 3 to this subpart; and
		iv. The facility total HCl-equivalent does not exceed 26 kg/hr (57 lb/hr).
2. Existing large tunnel kiln (design capacity $\geq 10$ tph of fired product), including all process streams	a. PM emissions must not exceed 0.018 kg/Mg (0.036 lb/ton) of fired product or 6.6 mg/dscm (0.0029 gr/dscf) at 17% O <sub>2</sub> ; or	i. The PM emissions measured using Method 5 of 40 CFR part 60, appendix A-3 or Method 29 of 40 CFR part 60, appendix A-8, over the period of the initial performance test, according to the calculations in §63.8445(f)(1), do not exceed 0.018 kg/Mg (0.036 lb/ton) of fired product or 6.6 mg/dscm (0.0029 gr/dscf) at 17% O <sub>2</sub> ; and
		ii. You establish and have a record of the applicable operating limits listed in Table 2 to this subpart over the 3-hour performance test during which PM emissions did not exceed 0.018 kg/Mg (0.036 lb/ton) of fired product or 6.6 mg/dscm (0.0029 gr/dscf) at 17% O <sub>2</sub> .
	b. Non-Hg HAP metals emissions must not exceed 0.0026 kg/hr (0.0057 lb/hr)	i. The non-Hg HAP metals emissions measured using Method 29 of 40 CFR part 60, appendix A-8, over the period of the initial performance test, do not exceed 0.0026 kg/hr (0.0057 lb/hr); and
		ii. You establish and have a record of the applicable operating limits listed in Table 2 to this subpart over the 3-hour performance test during which non-Hg HAP metals emissions did not exceed 0.0026 kg/hr (0.0057 lb/hr).
	c. Hg emissions must not exceed 2.1 E-05 kg/Mg (4.1 E-05 lb/ton) of fired product or 7.7 $\mu$ g/dscm at 17% O <sub>2</sub> or 2.5 E-04 kg/hr (5.5 E-04 lb/hr)	i. The Hg emissions measured using Method 29 of 40 CFR part 60, appendix A-8 or its alternative, ASTM D6784-02 (Reapproved 2008) (incorporated by reference, see §63.14), over the period of the initial performance test, do not exceed 2.1 E-05 kg/Mg (4.1 E-05 lb/ton) of fired product or 7.7 $\mu$ g/dscm at 17% O <sub>2</sub> or 2.5 E-04 kg/hr (5.5 E-04 lb/hr); and
		ii. You establish and have a record of the applicable operating limits listed in Table 2 to this subpart over the 3-hour performance test during which Hg emissions did not exceed 2.1 E-05 kg/Mg (4.1 E-05 lb/ton) of fired product or 7.7 $\mu$ g/dscm at 17% O <sub>2</sub> or 2.5 E-04 kg/hr (5.5 E-04 lb/hr).

3. Existing small tunnel kiln (design capacity <10 tph of fired product), including all process streams	a. PM emissions must not exceed 0.19 kg/Mg (0.37 lb/ton) of fired product or 4.8 mg/dscm (0.0021 gr/dscf) at 17% O <sub>2</sub> ; or	i. The PM emissions measured using Method 5 of 40 CFR part 60, appendix A-3 or Method 29 of 40 CFR part 60, appendix A-8, over the period of the initial performance test, according to the calculations in §63.8445(f)(1), do not exceed 0.19 kg/Mg (0.37 lb/ton) of fired product or 4.8 mg/dscm (0.0021 gr/dscf) at 17% O <sub>2</sub> ; and
		ii. You establish and have a record of the applicable operating limits listed in Table 2 to this subpart over the 3-hour performance test during which PM emissions did not exceed 0.19 kg/Mg (0.37 lb/ton) of fired product or 4.8 mg/dscm (0.0021 gr/dscf) at 17% O <sub>2</sub> .
	b. Non-Hg HAP metals emissions must not exceed 0.047 kg/hr (0.11 lb/hr)	i. The non-Hg HAP metals emissions measured using Method 29 of 40 CFR part 60, appendix A-8, over the period of the initial performance test, do not exceed 0.047 kg/hr (0.11 lb/hr); and
		ii. You establish and have a record of the applicable operating limits listed in Table 2 to this subpart over the 3-hour performance test during which non-Hg HAP metals emissions did not exceed 0.047 kg/hr (0.11 lb/hr).
	c. Hg emissions must not exceed 1.7 E-04 kg/Mg (3.3 E-04 lb/ton) of fired product or 91 µg/dscm at 17% O <sub>2</sub> or 8.5 E-04 kg/hr (0.0019 lb/hr)	i. The Hg emissions measured using Method 29 of 40 CFR part 60, appendix A-8 or its alternative, ASTM D6784-02 (Reapproved 2008) (incorporated by reference, see §63.14), over the period of the initial performance test, do not exceed 1.7 E-04 kg/Mg (3.3 E-04 lb/ton) of fired product or 91 µg/dscm at 17% O <sub>2</sub> or 8.5 E-04 kg/hr (0.0019 lb/hr); and
		ii. You establish and have a record of the applicable operating limits listed in Table 2 to this subpart over the 3-hour performance test during which Hg emissions did not exceed 1.7 E-04 kg/Mg (3.3 E-04 lb/ton) of fired product or 91 µg/dscm at 17% O <sub>2</sub> or 8.5 E-04 kg/hr (0.0019 lb/hr).
4. New or reconstructed large tunnel kiln (design capacity ≥10 tph of fired product), including all process streams	a. PM emissions must not exceed 0.0089 kg/Mg (0.018 lb/ton) of fired product or 3.2 mg/dscm (0.0014 gr/dscf) at 17% O <sub>2</sub> ; or	i. The PM emissions measured using Method 5 of 40 CFR part 60, appendix A-3, over the period of the initial performance test, according to the calculations in §63.8445(f)(1), do not exceed 0.0089 kg/Mg (0.018 lb/ton) of fired product or 3.2 mg/dscm (0.0014 gr/dscf) at 17% O <sub>2</sub> ; and
		ii. You establish and have a record of the applicable operating limits listed in Table 2 to this subpart over the 3-

		hour performance test during which PM emissions did not exceed 0.0089 kg/Mg (0.018 lb/ton) of fired product or 3.2 mg/dscm (0.0014 gr/dscf) at 17% O <sub>2</sub> .
	b. Non-Hg HAP metals emissions must not exceed 0.0026 kg/hr (0.0057 lb/hr)	i. The non-Hg HAP metals emissions measured using Method 29 of 40 CFR part 60, appendix A-8, over the period of the initial performance test, do not exceed 0.0026 kg/hr (0.0057 lb/hr); and
		ii. You establish and have a record of the applicable operating limits listed in Table 2 to this subpart over the 3-hour performance test during which non-Hg HAP metals emissions did not exceed 0.0026 kg/hr (0.0057 lb/hr).
	c. Hg emissions must not exceed 1.4 E-05 kg/Mg (2.8 E-05 lb/ton) of fired product or 6.2 µg/dscm at 17% O <sub>2</sub> or 1.6 E-04 kg/hr (3.4 E-04 lb/hr)	i. The Hg emissions measured using Method 29 of 40 CFR part 60, appendix A-8 or its alternative, ASTM D6784-02 (Reapproved 2008) (incorporated by reference, see §63.14), over the period of the initial performance test, do not exceed 1.4 E-05 kg/Mg (2.8 E-05 lb/ton) of fired product or 6.2 µg/dscm at 17% O <sub>2</sub> or 1.6 E-04 kg/hr (3.4 E-04 lb/hr); and
		ii. You establish and have a record of the applicable operating limits listed in Table 2 to this subpart over the 3-hour performance test during which Hg emissions did not exceed 1.4 E-05 kg/Mg (2.8 E-05 lb/ton) of fired product or 6.2 µg/dscm at 17% O <sub>2</sub> or 1.6 E-04 kg/hr (3.4 E-04 lb/hr).
5. New or reconstructed small tunnel kiln (design capacity <10 tph of fired product), including all process streams	a. PM emissions must not exceed 0.015 kg/Mg (0.030 lb/ton) of fired product or 4.7 mg/dscm (0.0021 gr/dscf) at 17% O <sub>2</sub> ; or	i. The PM emissions measured using Method 5 of 40 CFR part 60, appendix A-3, over the period of the initial performance test, according to the calculations in §63.8445(f)(1), do not exceed 0.015 kg/Mg (0.030 lb/ton) of fired product or 4.7 mg/dscm (0.0021 gr/dscf) at 17% O <sub>2</sub> ; and
		ii. You establish and have a record of the applicable operating limits listed in Table 2 to this subpart over the 3-hour performance test during which PM emissions did not exceed 0.015 kg/Mg (0.030 lb/ton) of fired product or 4.7 mg/dscm (0.0021 gr/dscf) at 17% O <sub>2</sub> .
	b. Non-Hg HAP metals emissions must not exceed 0.047 kg/hr (0.11 lb/hr)	i. The non-Hg HAP metals emissions measured using Method 29 of 40 CFR part 60, appendix A-8, over the period of the initial performance test, do not exceed 0.047 kg/hr (0.11 lb/hr); and

		ii. You establish and have a record of the applicable operating limits listed in Table 2 to this subpart over the 3-hour performance test during which non-Hg HAP metals emissions did not exceed 0.047 kg/hr (0.11 lb/hr).
	c. Hg emissions must not exceed 1.7 E-04 kg/Mg (3.3 E-04 lb/ton) of fired product or 91 µg/dscm at 17% O <sub>2</sub> or 8.5 E-04 kg/hr (0.0019 lb/hr)	i. The Hg emissions measured using Method 29 of 40 CFR part 60, appendix A-8 or its alternative, ASTM D6784-02 (Reapproved 2008) (incorporated by reference, see §63.14), over the period of the initial performance test, do not exceed 1.7 E-04 kg/Mg (3.3 E-04 lb/ton) of fired product or 91 µg/dscm at 17% O <sub>2</sub> or 8.5 E-04 kg/hr (0.0019 lb/hr); and
		ii. You establish and have a record of the applicable operating limits listed in Table 2 to this subpart over the 3-hour performance test during which Hg emissions did not exceed 1.7 E-04 kg/Mg (3.3 E-04 lb/ton) of fired product or 91 µg/dscm at 17% O <sub>2</sub> or 8.5 E-04 kg/hr (0.0019 lb/hr).
6. Existing, new or reconstructed periodic kiln	a. Minimize HAP emissions	i. Develop a designed firing time and temperature cycle for each periodic kiln. You must either program the time and temperature cycle into your kiln or track each step on a log sheet; and
		ii. Label each periodic kiln with the maximum load (in tons) of product that can be fired in the kiln during a single firing cycle; and
		iii. Develop maintenance procedures for each kiln that, at a minimum, specify the frequency of inspection and maintenance of temperature monitoring devices, controls that regulate air-to-fuel ratios, and controls that regulate firing cycles.
7. Existing, new or reconstructed tunnel kiln	a. Minimize dioxin/furan emissions	i. Conduct initial inspection of the burners and associated combustion controls (as applicable); and
		ii. Tune the specific burner type to optimize combustion.

[↑ Back to Top](#)

**Table 6 to Subpart JJJJJ of Part 63—Continuous Compliance With Emission Limitations and Work Practice Standards**

As stated in §63.8470, you must demonstrate continuous compliance with each emission limitation and work practice standard that applies to you according to the following table:



For each . . .	For the following . . .	You must demonstrate continuous compliance by . . .
1. Tunnel kiln equipped with a DLA	a. Each emission limit in Table 1 to this subpart and each operating limit in Item 1 of Table 2 to this subpart for tunnel kilns equipped with a DLA	i. Collecting the DLA pressure drop data according to §63.8450(a); reducing the DLA pressure drop data to 3-hour block averages according to §63.8450(a); maintaining the average pressure drop across the DLA for each 3-hour block period at or above the average pressure drop established during the HF/HCl/Cl <sub>2</sub> performance test in which compliance was demonstrated; or continuously monitoring the bypass stack damper position at least once every 15 minutes during normal kiln operation, and initiating corrective action within 1 hour after the bypass damper is opened allowing the kiln exhaust gas to bypass the DLA and completing corrective action in accordance with your OM&M plan; and
		ii. Verifying that the limestone hopper and storage bin (located at the top of the DLA) contain adequate limestone by performing a daily visual check, which could include one of the following: (1) Conducting a physical check of the hopper; (2) creating a visual access point, such as a window, on the side of the hopper; (3) installing a camera in the hopper that provides continuous feed to a video monitor in the control room; or (4) confirming that load level indicators in the hopper are not indicating the need for additional limestone; and
		iii. Recording the limestone feeder setting daily (on a per ton of fired product basis) to verify that the feeder setting is being maintained at or above the level established during the HF/HCl/Cl <sub>2</sub> performance test in which compliance was demonstrated; and
		iv. Using the same grade of limestone from the same source as was used during the HF/HCl/Cl <sub>2</sub> performance test; maintaining records of the source and type of limestone; and
		v. Performing VE observations of the DLA stack at the frequency specified in §63.8470(e) using Method 22 of 40 CFR part 60, appendix A-7; maintaining no VE from the DLA stack.
2. Tunnel kiln equipped with a DIFF or DLS/FF	a. Each emission limit in Table 1 to this subpart and each operating limit in Item 2 of Table 2 to this subpart for tunnel kilns equipped with DIFF or DLS/FF	i. If you use a bag leak detection system, as prescribed in 63.8450(e), initiating corrective action within 1 hour of a bag leak detection system alarm and completing corrective actions in accordance with your OM&M plan; operating and maintaining the fabric filter such that the alarm is not engaged for more than 5 percent of the total operating time in a 6-month block reporting period; in calculating this operating time fraction, if inspection of the fabric filter demonstrates that no corrective action is required, no alarm time is counted; if corrective action is required, each alarm is

		counted as a minimum of 1 hour; if you take longer than 1 hour to initiate corrective action, the alarm time is counted as the actual amount of time taken by you to initiate corrective action; or performing VE observations of the DIFF or DLS/FF stack at the frequency specified in §63.8470(e) using Method 22 of 40 CFR part 60, appendix A-7; and maintaining no VE from the DIFF or DLS/FF stack; and
		ii. Verifying that lime is free-flowing via a load cell, carrier gas/lime flow indicator, carrier gas pressure drop measurement system, or other system; recording all monitor or sensor output, and if lime is found not to be free flowing, promptly initiating and completing corrective actions in accordance with your OM&M plan; recording the feeder setting once during each shift of operation to verify that the feeder setting is being maintained at or above the level established during the HF/HCl/Cl <sub>2</sub> performance test in which compliance was demonstrated.
3. Tunnel kiln equipped with a WS	a. Each emission limit in Table 1 to this subpart and each operating limit in Item 3 of Table 2 to this subpart for tunnel kilns equipped with WS	i. Collecting the scrubber liquid pH data according to §63.8450(a); reducing the scrubber liquid pH data to 3-hour block averages according to §63.8450(a); maintaining the average scrubber liquid pH for each 3-hour block period at or above the average scrubber liquid pH established during the HF/HCl/Cl <sub>2</sub> performance test in which compliance was demonstrated; and
		ii. Collecting the scrubber liquid flow rate data according to §63.8450(a); reducing the scrubber liquid flow rate data to 3-hour block averages according to §63.8450(a); maintaining the average scrubber liquid flow rate for each 3-hour block period at or above the highest average scrubber liquid flow rate established during the HF/HCl/Cl <sub>2</sub> and PM/non-Hg HAP metals performance tests in which compliance was demonstrated.
4. Tunnel kiln equipped with an ACI system	Each emission limit in Table 1 to this subpart and each operating limit in Item 4 of Table 2 to this subpart for tunnel kilns equipped with ACI system	Collecting the carbon flow rate data according to §63.8450(a); reducing the carbon flow rate data to 3-hour block averages according to §63.8450(a); maintaining the average carbon flow rate for each 3-hour block period at or above the average carbon flow rate established during the Hg performance test in which compliance was demonstrated.
5. Tunnel kiln with no add-on control	a. Each emission limit in Table 1 to this subpart and each operating limit in Item 5 of Table 2 to this subpart for tunnel kilns with no add-on control	i. Performing VE observations of the stack at the frequency specified in §63.8470(e) using Method 22 of 40 CFR part 60, appendix A-7; and maintaining no VE from the stack.

		ii. If your last calculated total facility maximum potential HCl-equivalent was not at or below the health-based standard in Table 1 to this subpart, collecting the kiln process rate data according to §63.8450(a); reducing the kiln process rate data to 3-hour block averages according to §63.8450(a); maintaining the average kiln process rate for each 3-hour block period at or below the kiln process rate determined according to §63.8445(g)(1).
6. Periodic kiln	a. Minimize HAP emissions	i. Using a designed firing time and temperature cycle for each periodic kiln; and
		ii. For each firing load, documenting the total tonnage of product placed in the kiln to ensure that it is not greater than the maximum load identified in Item 1.a.ii of Table 3 to this subpart; and
		iii. Following maintenance procedures for each kiln that, at a minimum, specify the frequency of inspection and maintenance of temperature monitoring devices, controls that regulate air-to-fuel ratios, and controls that regulate firing cycles; and
		iv. Developing and maintaining records for each periodic kiln, as specified in §63.8490.
7. Tunnel kiln	a. Minimize dioxin/furan emissions	i. Maintaining and inspecting the burners and associated combustion controls (as applicable) and tuning the specific burner type to optimize combustion no later than 36 calendar months after the previous tune-up; and
		ii. Maintaining records of burner tune-ups used to demonstrate compliance with the dioxin/furan work practice standard; and
		iii. Submitting a report of most recent tune-up conducted with compliance report.

[↑ Back to Top](#)

**Table 7 to Subpart JJJJJ of Part 63—Compliance Dates**

As stated in §63.8395, you must meet each compliance date in the following table that applies to you:

<b>If you have a(n) . . .</b>	<b>Then you must . . .</b>	<b>No later than . . .</b>
1. New or reconstructed affected source and the initial startup of your affected source is after December 18, 2014, but before December 28, 2015	Comply with the applicable emission limitations and work practice standards in Tables 1, 2,	December 28, 2015.

	and 3 to this subpart	
2. New or reconstructed affected source and the initial startup of your affected source is after December 28, 2015	Comply with the applicable emission limitations and work practice standards in Tables 1, 2, and 3 to this subpart	Initial startup of your affected source.
3. Existing affected source	Comply with the applicable emission limitations and work practice standards in Tables 1, 2, and 3 to this subpart	December 26, 2018.
4. Existing area source that increases its emissions or its potential to emit such that it becomes a major source of HAP by adding a new affected source or by reconstructing	Be in compliance with this subpart	Initial startup of your affected source as a major source.
5. New area source ( <i>i.e.</i> , an area source for which construction or reconstruction commenced after December 18, 2014) that increases its emissions or its potential to emit such that it becomes a major source of HAP	Be in compliance with this subpart	Initial startup of your affected source as a major source.

[↑ Back to Top](#)

**Table 8 to Subpart JJJJJ of Part 63—Deadlines for Submitting Notifications**

As stated in §63.8480, you must submit each notification that applies to you according to the following table:

<b>If you . . .</b>	<b>You must . . .</b>	<b>No later than . . .</b>	<b>As specified in . . .</b>
1. Start up your affected source before December 28, 2015	Submit an Initial Notification	June 22, 2016	§63.9(b)(2).
2. Start up your new or reconstructed affected source on or after December 28, 2015	Submit an Initial Notification	120 calendar days after you become subject to this subpart	§63.9(b)(2).
3. Are required to conduct a performance test	Submit a notification of intent to conduct a performance test	60 calendar days before the performance test is scheduled to begin	§63.7(b)(1).
4. Are required to conduct a compliance demonstration that includes a performance test according to the requirements in Table 4 to this subpart	Submit a Notification of Compliance Status, including the performance test results	60 calendar days following the completion of the performance test, by the close of business	§63.9(h) and §63.10(d)(2).

5. Are required to conduct a compliance demonstration required in Table 5 to this subpart that does not include a performance test ( <i>i.e.</i> , compliance demonstrations for the work practice standards)	Submit a Notification of Compliance Status	30 calendar days following the completion of the compliance demonstrations, by the close of business	§63.9(h).
6. Request to use the routine control device maintenance alternative standard according to §63.8420(d)	Submit your request	120 calendar days before the compliance date specified in §63.8395	

[↑ Back to Top](#)

**Table 9 to Subpart JJJJJ of Part 63—Requirements for Reports**

As stated in §63.8485, you must submit each report that applies to you according to the following table:

<b>You must submit . . .</b>	<b>The report must contain . . .</b>	<b>You must submit the report . . .</b>
1. A compliance report.	a. If there are no deviations from any emission limitations (emission limits, operating limits) that apply to you, a statement that there were no deviations from the emission limitations during the reporting period. If there were no periods during which the CMS was out-of-control as specified in your OM&M plan, a statement that there were no periods during which the CMS was out-of-control during the reporting period	Semiannually according to the requirements in §63.8485(b).
	b. If you have a deviation from any emission limitation (emission limit, operating limit) during the reporting period, the report must contain the information in §63.8485(c)(9). If there were periods during which the CMS was out-of-control, as specified in your OM&M plan, the report must contain the information in §63.8485(d)	Semiannually according to the requirements in §63.8485(b).

[↑ Back to Top](#)

**Table 10 to Subpart JJJJJ of Part 63—Applicability of General Provisions to Subpart JJJJJ**

As stated in §63.8505, you must comply with the General Provisions in §§63.1 through 63.16 that apply to you according to the following table:

<b>Citation</b>	<b>Subject</b>	<b>Brief description</b>	<b>Applies to subpart JJJJJ?</b>
§63.1	Applicability	Initial applicability determination; applicability after standard established; permit requirements; extensions, notifications	Yes.

§63.2	Definitions	Definitions for part 63 standards	Yes.
§63.3	Units and Abbreviations	Units and abbreviations for part 63 standards	Yes.
§63.4	Prohibited Activities	Compliance date; circumvention; severability	Yes.
§63.5	Construction/Reconstruction	Applicability; applications; approvals	Yes.
§63.6(a)	Applicability	General Provisions (GP) apply unless compliance extension; GP apply to area sources that become major	Yes.
§63.6(b)(1)-(4)	Compliance Dates for New and Reconstructed sources	Standards apply at effective date; 3 years after effective date; upon startup; 10 years after construction or reconstruction commences for section 112(f)	Yes.
§63.6(b)(5)	Notification	Must notify if commenced construction or reconstruction after proposal	Yes.
§63.6(b)(6)	[Reserved]		No.
§63.6(b)(7)	Compliance Dates for New and Reconstructed Area Sources That Become Major	Area sources that become major must comply with major source standards immediately upon becoming major, regardless of whether required to comply when they were area sources	Yes.
§63.6(c)(1)-(2)	Compliance Dates for Existing Sources	Comply according to date in subpart, which must be no later than 3 years after effective date; for section 112(f) standards, comply within 90 calendar days of effective date unless compliance extension	Yes.
§63.6(c)(3)-(4)	[Reserved]		No.

§63.6(c)(5)	Compliance Dates for Existing Area Sources That Become Major	Area sources that become major must comply with major source standards by date indicated in subpart or by equivalent time period (for example, 3 years)	Yes.
§63.6(d)	[Reserved]		No.
§63.6(e)(1)(i)	Operation & Maintenance	General Duty to minimize emissions	No. See §63.8420(b) for general duty requirement.
§63.6(e)(1)(ii)	Operation & Maintenance	Requirement to correct malfunctions ASAP	No.
§63.6(e)(1)(iii)	Operation & Maintenance	Operation and maintenance requirements enforceable independent of emissions limitations	Yes.
§63.6(e)(2)	[Reserved]		No.
§63.6(e)(3)	Startup, Shutdown, and Malfunction Plan (SSMP)	Requirement for startup, shutdown, and malfunction (SSM) and SSMP; content of SSMP	No.
§63.6(f)(1)	Compliance Except During SSM	You must comply with emission standards at all times except during SSM	No.
§63.6(f)(2)-(3)	Methods for Determining Compliance	Compliance based on performance test, operation and maintenance plans, records, inspection	Yes.
§63.6(g)	Alternative Standard	Procedures for getting an alternative standard	Yes.
§63.6(h)	Opacity/VE Standards	Requirements for opacity and VE standards	No, not applicable.
§63.6(i)	Compliance Extension	Procedures and criteria for Administrator to grant compliance extension	Yes.

§63.6(j)	Presidential Compliance Exemption	President may exempt source category	Yes.
§63.7(a)(1)-(2)	Performance Test Dates	Dates for conducting initial performance testing and other compliance demonstrations for emission limits and work practice standards; must conduct 180 calendar days after first subject to rule	Yes.
§63.7(a)(3)	Section 114 Authority	Administrator may require a performance test under CAA section 114 at any time	Yes.
§63.7(a)(4)	Notification of Delay in Performance Testing Due To Force Majeure	Must notify Administrator of delay in performance testing due to force majeure	Yes.
§63.7(b)(1)	Notification of Performance Test	Must notify Administrator 60 calendar days before the test	Yes.
§63.7(b)(2)	Notification of Rescheduling	Must notify Administrator 5 calendar days before scheduled date of rescheduled date	Yes.
§63.7(c)	Quality Assurance(QA)/Test Plan	Requirements; test plan approval procedures; performance audit requirements; internal and external QA procedures for testing	Yes.
§63.7(d)	Testing Facilities	Requirements for testing facilities	Yes.
§63.7(e)(1)	Conditions for Conducting Performance Tests	Cannot conduct performance tests during SSM; not a violation to exceed standard during SSM	No, §63.8445 specifies requirements.
§63.7(e)(2)-(3)	Conditions for Conducting Performance Tests	Must conduct according to subpart and EPA test methods unless Administrator approves alternative; must have at least three test runs of at least 1 hour each; compliance is based on	Yes.



		arithmetic mean of three runs; conditions when data from an additional test run can be used	
§63.7(e)(4)	Testing under Section 114	Administrator's authority to require testing under section 114 of the Act	Yes.
§63.7(f)	Alternative Test Method	Procedures by which Administrator can grant approval to use an alternative test method	Yes.
§63.7(g)	Performance Test Data Analysis	Must include raw data in performance test report; must submit performance test data 60 calendar days after end of test with the notification of compliance status	Yes.
§63.7(h)	Waiver of Tests	Procedures for Administrator to waive performance test	Yes.
§63.8(a)(1)	Applicability of Monitoring Requirements	Subject to all monitoring requirements in subpart	Yes.
§63.8(a)(2)	Performance Specifications	Performance Specifications in appendix B of 40 CFR part 60 apply	Yes.
§63.8(a)(3)	[Reserved]		No.
§63.8(a)(4)	Monitoring with Flares	Requirements for flares in §63.11 apply	No, not applicable.
§63.8(b)(1)	Monitoring	Must conduct monitoring according to standard unless Administrator approves alternative	Yes.
§63.8(b)(2)-(3)	Multiple Effluents and Multiple Monitoring Systems	Specific requirements for installing and reporting on monitoring systems	Yes.

§63.8(c)(1)	Monitoring System Operation and Maintenance	Maintenance consistent with good air pollution control practices	Yes.
§63.8(c)(1)(i)	Routine and Predictable SSM	Reporting requirements for SSM when action is described in SSMP	No.
§63.8(c)(1)(ii)	SSM not in SSMP	Reporting requirements for SSM when action is not described in SSMP	Yes.
§63.8(c)(1)(iii)	Compliance with Operation and Maintenance Requirements	How Administrator determines if source complying with operation and maintenance requirements	No.
§63.8(c)(2)-(3)	Monitoring System Installation	Must install to get representative emission and parameter measurements	Yes.
§63.8(c)(4)	CMS Requirements	Requirements for CMS	No, §63.8450 specifies requirements.
§63.8(c)(5)	Continuous Opacity Monitoring System (COMS) Minimum Procedures	COMS minimum procedures	No, not applicable.
§63.8(c)(6)	CMS Requirements	Zero and high level calibration check requirements	Yes.
§63.8(c)(7)-(8)	CMS Requirements	Out-of-control periods	Yes.
§63.8(d)(1) and (2)	CMS Quality Control	Requirements for CMS quality control	Yes.
§63.8(d)(3)	CMS Quality Control	Written procedures for CMS	No, §63.8425(b)(9) specifies requirements
§63.8(e)	CMS Performance Evaluation	Requirements for CMS performance evaluation	Yes.
§63.8(f)(1)-(5)	Alternative Monitoring Method	Procedures for Administrator to	Yes.

		approve alternative monitoring	
§63.8(f)(6)	Alternative to Relative Accuracy Test	Procedures for Administrator to approve alternative relative accuracy test for continuous emissions monitoring systems (CEMS)	No, not applicable.
§63.8(g)	Data Reduction	COMS and CEMS data reduction requirements	No, not applicable.
§63.9(a)	Notification Requirements	Applicability; State delegation	Yes.
§63.9(b)	Initial Notifications	Requirements for initial notifications	
§63.9(c)	Request for Compliance Extension	Can request if cannot comply by date or if installed BACT/LAER	Yes.
§63.9(d)	Notification of Special Compliance Requirements for New Source	For sources that commence construction between proposal and promulgation and want to comply 3 years after effective date	Yes.
§63.9(e)	Notification of Performance Test	Notify Administrator 60 calendar days prior	Yes.
§63.9(f)	Notification of VE/Opacity Test	Notify Administrator 30 calendar days prior	No, not applicable.
§63.9(g)(1)	Additional Notifications When Using CMS	Notification of performance evaluation	Yes.
§63.9(g)(2)-(3)	Additional Notifications When Using CMS	Notification of COMS data use; notification that relative accuracy alternative criterion were exceeded	No, not applicable.
§63.9(h)	Notification of Compliance Status	Contents; submittal requirements	Yes.
§63.9(i)	Adjustment of Submittal	Procedures for Administrator to approve change in when	Yes.


	Deadlines	notifications must be submitted	
§63.9(j)	Change in Previous Information	Must submit within 15 calendar days after the change	Yes.
§63.10(a)	Recordkeeping/Reporting	Applicability; general information	Yes.
§63.10(b)(1)	General Recordkeeping Requirements	General requirements	Yes.
§63.10(b)(2)(i)	Records Related to SSM	Recordkeeping of occurrence and duration of startups and shutdowns	No.
§63.10(b)(2)(ii)	Records Related to SSM	Recordkeeping of failures to meet a standard	No. See §63.8490(c)(2) for recordkeeping of (1) date, time and duration; (2) listing of affected source or equipment, and an estimate of the volume of each regulated pollutant emitted over the standard; and (3) actions to minimize emissions and correct the failure.
§63.10(b)(2)(iii)	Records Related to SSM	Maintenance records	
§63.10(b)(2)(iv)-(v)	Records Related to SSM	Actions taken to minimize emissions during SSM	No.
§63.10(b)(2)(vi)-(xii) and (xiv)	CMS Records	Records when CMS is malfunctioning, inoperative or out-of-control	Yes.
§63.10(b)(2)(xiii)	Records	Records when using alternative to relative accuracy test	
§63.10(b)(3)	Records	Applicability Determinations	Yes.
§63.10(c)(1)-(15)	Records	Additional records for CMS	No, §§63.8425 and 63.8490 specify requirements

§63.10(d)(1) and (2)	General Reporting Requirements	Requirements for reporting; performance test results reporting	Yes.
§63.10(d)(3)	Reporting Opacity or VE Observations	Requirements for reporting opacity and VE	No, not applicable.
§63.10(d)(4)	Progress Reports	Must submit progress reports on schedule if under compliance extension	Yes.
§63.10(d)(5)	SSM Reports	Contents and submission.	No. See §63.8485(c)(9) for malfunction reporting requirements.
§63.10(e)(1)-(3)	Additional CMS Reports	Requirements for CMS reporting	No, §§63.8425 and 63.8485 specify requirements.
§63.10(e)(4)	Reporting COMS data	Requirements for reporting COMS data with performance test data	No, not applicable.
§63.10(f)	Waiver for Recordkeeping/Reporting	Procedures for Administrator to waive	Yes.
§63.11	Flares	Requirement for flares	No, not applicable.
§63.12	Delegation	State authority to enforce standards	
§63.13	Addresses	Addresses for reports, notifications, requests	Yes.
§63.14	Incorporation by Reference	Materials incorporated by reference	Yes.
§63.15	Availability of Information	Information availability; confidential information	Yes.
§63.16	Performance Track Provisions	Requirements for Performance Track member facilities	Yes.

Need assistance?

**CERTIFICATE OF SERVICE**

I, Cynthia Hook, hereby certify that a copy of this permit has been mailed by first class mail to Acme Brick Company - Jonesboro Plant, 2905 Dan Avenue, Jonesboro, AR, 72401, on this 11<sup>th</sup> day of December, 2018.



---

Cynthia Hook, ASIII, Office of Air Quality